

APPLICATIONS

- Factories
- Warehouses
- Cold Storage
- Industrial Areas

CONSTRUCTION

- Die-cast aluminium housing epoxy powder coated
- Stainless steel mounting hoop
- Polycarbonate optics
- IK08 impact rating

TECHNICAL DETAILS


- Various Wattages
- CRI>80
- CCT Options 4000K, 5000K
- 120° Beam angle



OPTIONS

- /AR9 - 90° Aluminium Reflector
- /AR6 - 60° Aluminium Reflector
- /RMB - Rotatable mounting bracket
- /Micro-Wave Sensor

DIMENSIONS

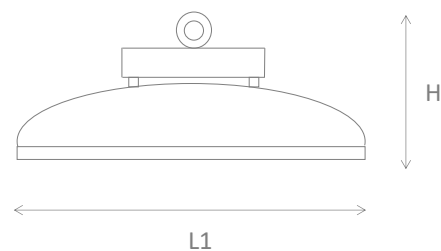

90w - L1 260mm - H 160mm

140w - L1 260mm - H 160mm

185w & 240w - L1 260mm - H 160mm

ORDER CODE	DESCRIPTION
SK/90/4K/BK	SKYLER 90W 13000LM 4K BLACK BODY
SK/140/4K/BK	SKYLER 140W 19500LM 4K BLACK BODY
SK/185/4K/BK	SKYLER 185W 26000LM 4K BLACK BODY
SK/240/4K/BK	SKYLER 240W 33800LM 4K BLACK BODY