



## APPLICATIONS

- Footpaths
- Landscapes
- Car Parks

## CONSTRUCTION

- Die-cast aluminium body with integral heatsink
- Vandal resistant polycarbonate diffuser
- Chromate conversion powder coated

## TECHNICAL DETAILS


- 76mm mounting spigot
- Option of 4 Optics
- CRI>80
- CCT 4000K & 5000K
- Dimmable driver



## OPTIONS

- /PCR - Twist-lock photo-cell receptacle

## DIMENSIONS

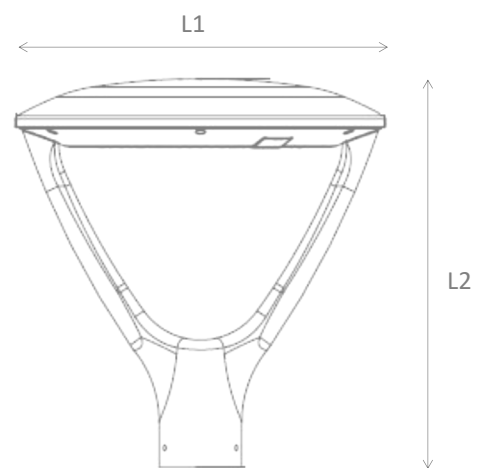

L1 - 457mm - L2 - 479mm

ORDER CODE	DESCRIPTION
OB/37/4K/BK	OBAN 37W 4600LM BLACK BODY
OB/65/4K/BK	OBAN 65W 8400LM BLACK BODY