


# Commercial Lighting Solutions

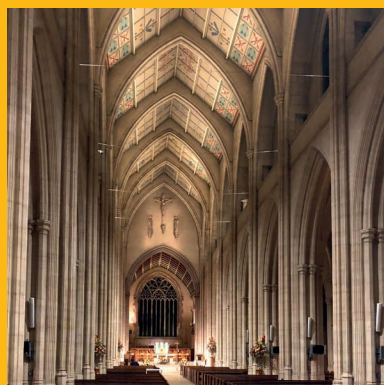

Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Designers and Manufacturers

ALD Lighting was established in 1988, primarily to provide a design and manufacturing service to others within the lighting industry. As the business progressively developed, our success enabled us to further reinforce the resources available to establish a corporate identity as a leading supplier of bespoke and standard product range.

Modern buildings require a highly diverse range of services specifically designed to satisfy the requirements of mainly its occupants, lighting being a major necessity it generally brings its own unique challenges to correctly and efficiently provide this. We at ALD know the need to treat each project individually, developing bespoke solutions for every project circumstance.

We strive to add value and hopefully contribute in turn a basis for our customers success by our commitment in providing first class technical lighting and scheme design, along with tried and tested methods of manufacture, enabling us to supply energy efficient cost effective, quality assured products.

We hope our product range covers most requirement applications however, our technical and sales team are always on hand to advise on any lighting product or scheme design requirement.



# Anti-Vandal



Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Trend - A



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



## APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


## CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

## DIMENSIONS

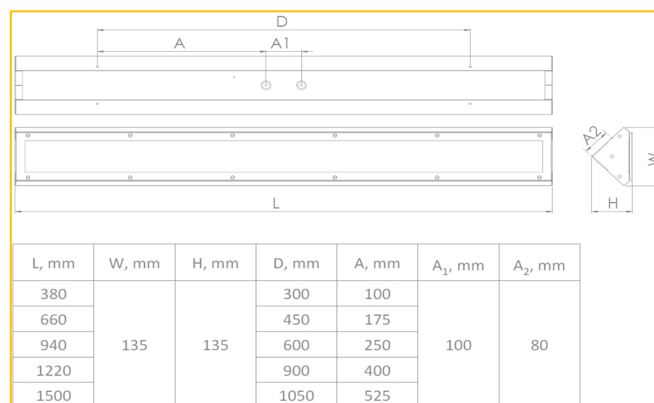

PRODUCT CODE	DESCRIPTION
TRA/13/4K/WH	TREND A 13W 1,548LM 4K 380MM
TRA/19/4K/WH	TREND A 19W 2,334LM 4K 660MM
TRA/28/4K/WH	TREND A 28W 3,502LM 4K 940MM
TRA/38/4K/WH	TREND A 38W 4,668LM 4K 1220MM
TRA/55/4K/WH	TREND A 55W 5,295LM 4K 1500MM

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: TRA/13/4K/WH/DALI





# Trend - R



## APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


## CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

## DIMENSIONS

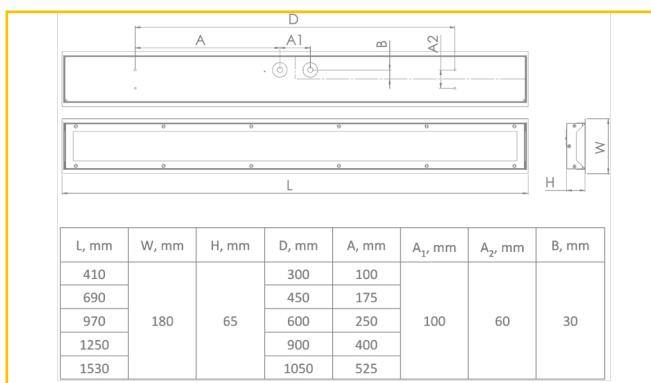

PRODUCT CODE	DESCRIPTION
TRR/11/4K/WH	TREND R 11W 1,548LM 4K 410MM
TRR/19/4K/WH	TREND R 19W 2,334LM 4K 690MM
TRR/28/4K/WH	TREND R 28W 3,502LM 4K 970MM
TRR/38/4K/WH	TREND R 38W 4,668LM 4K 1250MM
TRR/41/4K/WH	TREND R 41W 5,295LM 4K 1530MM

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: TRR/11/4K/WH/DALI



# Trend - S



## APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit

## CONSTRUCTION


- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings
- Stainless Steel mounting bracket option

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3



## DIMENSIONS

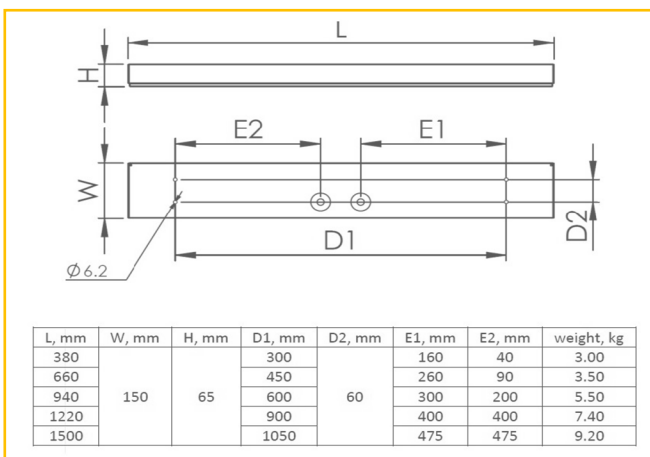

PRODUCT CODE	DESCRIPTION
TRS/13/4K/WH	TREND S 13W 1,548LM 4K 380MM
TRS/19/4K/WH	TREND S 19W 2,334LM 4K 660MM
TRS/28/4K/WH	TREND S 28W 3,502LM 4K 940MM
TRS/38/4K/WH	TREND S 38W 4,668LM 4K 1220MM
TRS/55/4K/WH	TREND S 55W 5,295LM 4K 1500MM

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: TRS/13/4K/WH/DALI

# Trend - W



## APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


## CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 85° glow wire
- Stainless anti-tamper fixings

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

## DIMENSIONS

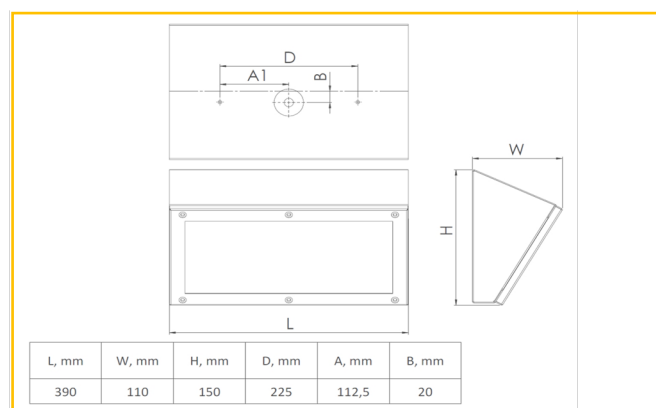

PRODUCT CODE	DESCRIPTION
TRW/11/4K/WH	TREND W 11W 1,208LM 380MM
TRW/13/4K/WH	TREND W 13W 1,526LM 380MM


OPTION	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: TRR/11/4K/WH/DALI



# Architectural & Feature

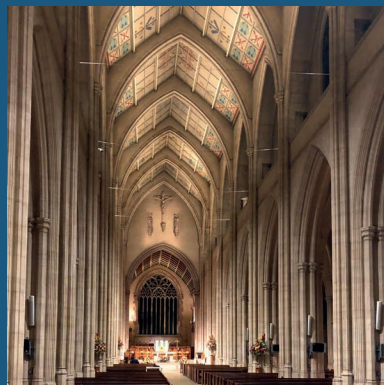

Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



# Atlas



## APPLICATIONS

- Pathway
- Landscapes
- Car Parks
- Façade illumination


## CONSTRUCTION

- Die-cast aluminium body
- Stainless steel bezel
- Tempered glass lens

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- IK10
- CCT 3000, 4000K
- Life 40,000hrs L80/B50

## DIMENSIONS

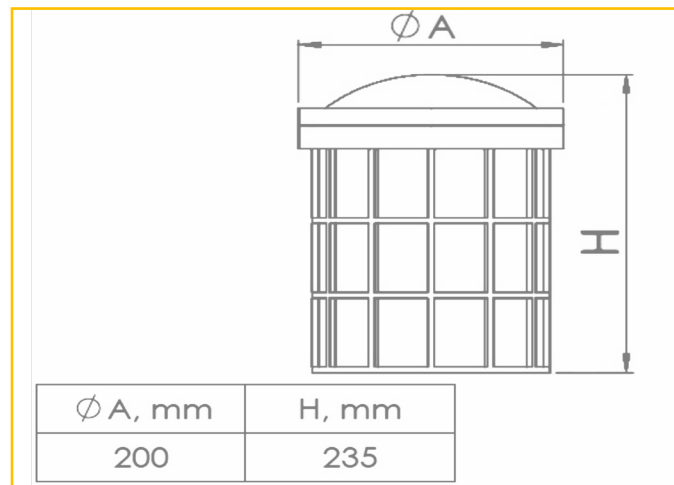

ORDER CODE	DESCRIPTION
ALT/9/4K/L60	ATLAS 9W, 4K, 1086LM, 60° OPTIC
ALT/13/4K/L60	ATLAS 13W, 4K, 1489LM, 60° OPTIC
ALT/19/4K/L60	ATLAS 19W, 4K, 2067LM, 60° OPTIC

OPTIONS	DESCRIPTION
/L30	30°x 30° OPTIC
/L45	45°x 45° OPTIC
/LA1	ASYMMETRIC OPTIC



Ordering Format: Product Code / Option

Example: ALT/9/4K/L30

\* Suffix 4K to 3K FOR 3000 Kelvin

# Austin



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended


Track



## APPLICATIONS

- Pathway
- Landscapes
- Door Entrance
- Façade illumination

## DIMENSIONS

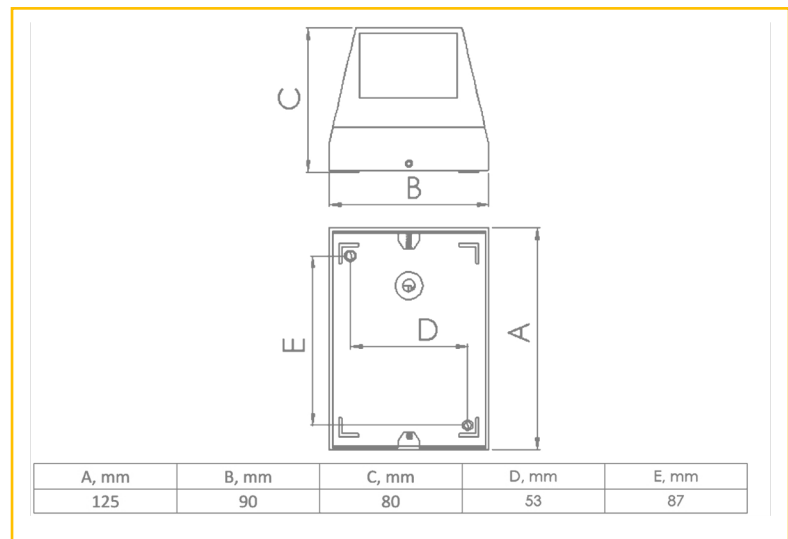

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- IK08
- CCT 3000, 4000K
- Life 40,000hrs L80/B50

ORDER CODE	DESCRIPTION
AUS/6/4K/GR	AUSTIN 6W, 510LM, 2 X 60°, FINISHED RAL7043


## CONSTRUCTION

- Die-cast aluminium body
- Stainless steel fixings
- Tempered glass lens

## OPTICS

- 2 x 60° Optic

## LIGHT DISTRIBUTION CURVE

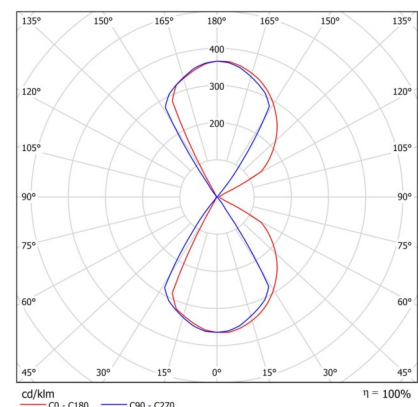

# Berkley



## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks


## CONSTRUCTION

- Die-cast aluminium body
- Opal polycarbonate diffuser
- Exterior powder coated RAL7043

## TECHNICAL DETAILS

- Anti-tamper fixings
- IK08
- CRI>80+
- CCT 3000 & 4000K

## DIMENSIONS

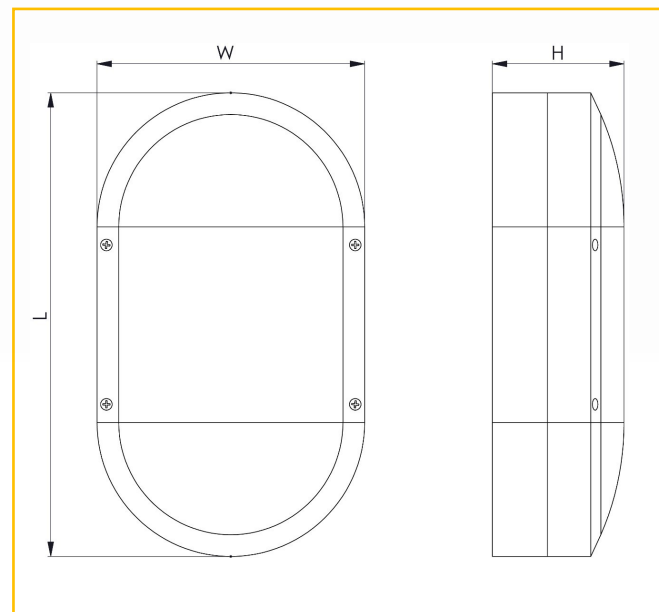

L - 280mm - W - 185mm - H - 95mm

ORDER CODE	DESCRIPTION
BKL/10/4K/O/GR	BERKLEY, 10W, 4K, 835LM, RAL7043
BKL/7/4K/H/GR	BERKLEY, 7W, 4K, 451LM HOODED, RAL7043

IP54



# Cyprus



## APPLICATIONS

- Feature
- Landscapes
- Signage
- Façade illumination

## CONSTRUCTION

- Die-cast aluminium body
- Stainless steel fixings
- Tempered glass lens

## TECHNICAL DETAILS


- Stainless Steel fixings
- CRI>80
- IK09
- CCT 3000, 4000K
- Life 50,000hrs L80/B50

## OPTICS

- 30° x 30° Optic




## DIMENSIONS

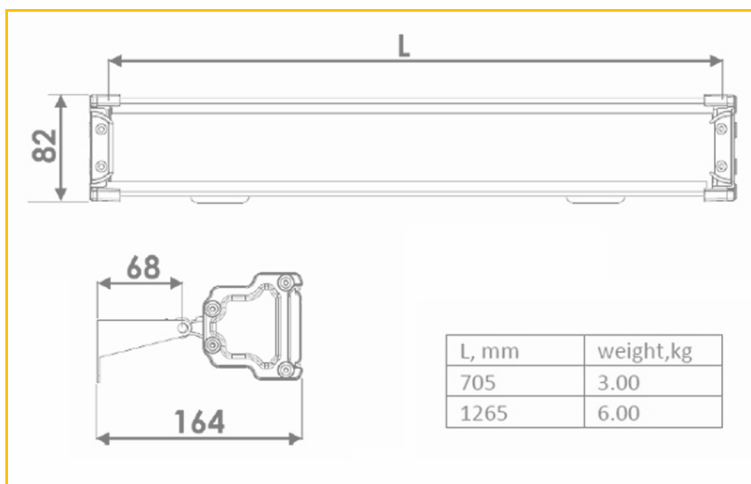

ORDER CODE	DESCRIPTION
CY/15/4K/GR	CYPRUS 15W, 4K, 30° OPTIC, 1900LM, 705MM
CY/22/4K/GR	CYPRUS 22W, 4K, 30° OPTIC, 2370LM, 705MM
CY/29/4K/GR	CYPRUS 29W, 4K, 30° OPTIC, 3162LM, 705MM
CY/30/4K/GR	CYPRUS 30W, 4K, 30° OPTIC, 3794LM, 1265MM
CY/42/4K/GR	CYPRUS 42W, 4K, 30° OPTIC, 4750LM, 1265MM
CY/59/4K/GR	CYPRUS 59W, 4K, 30° OPTIC, 6324LM, 1265MM

\*Suffix 4K to 3K for 3000 Kelvin LED \*

## POLAR CURVE

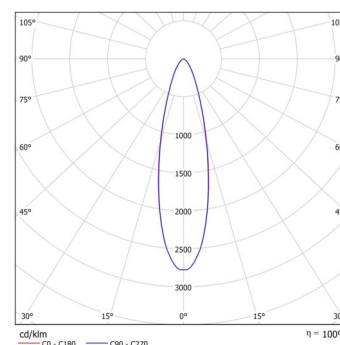



# Windsor



## APPLICATIONS

- Facia Illumination
- Point source
- Signage
- Shrubbery


## CONSTRUCTION

- Die-cast aluminium body & frame
- Low glare baffle option
- Injection moulded optics
- Powder coated Chromate conversion coating

## TECHNICAL DETAILS

- Option of Optics
- CRI>70+
- CCT 3000 & 4000K
- IK08

## DIMENSIONS

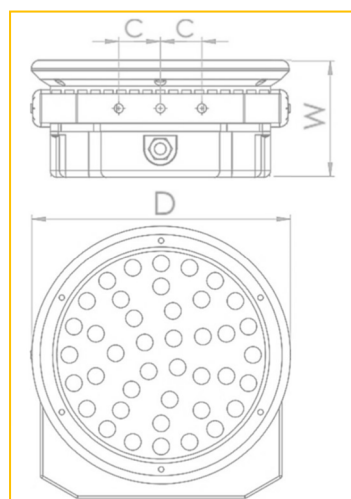

D - 230mm x H - 118mm

PRODUCT CODE	DESCRIPTION
WN/31/4K/L30	WINDSOR, 31W, 4K, 3,800LM, 30°
WN/49/4K/L30	WINDSOR, 49W, 4K, 5,280LM, 30°
WN/57/4K/L30	WINDSOR, 57W, 4K, 5,891LM, 30°

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING
/L15	15 x 15° OPTIC
/L30	30 x 30° OPTIC
/L50	50 x 50° OPTIC

Ordering Format: Product Code / Option


Example: WN/31/4K/L30

\*\* Please suffix 4K to 3K TO 3000 Kelvin - Suffix L30 for required optics\*\*

IP66



# Downlighters

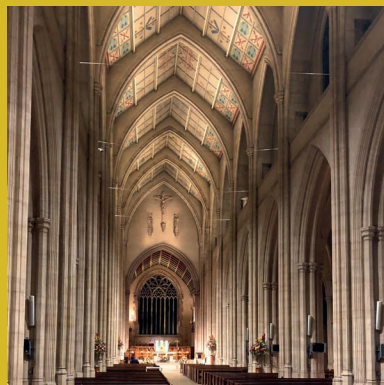

Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Capri - LG



## APPLICATIONS

- Museum
- Schools
- Cinema
- Retail


## CONSTRUCTION

- Thermal optimised aluminium heat sink
- Injection moulded faceted reflector
- Die-cast aluminium bezel epoxy powder Coated white

## TECHNICAL DETAILS

- CRI>80
- 36° reflector as standard
- CCT colour option 3000K, 4000K
- Life > 50,000h L70/F50
- Osram Flex dip driver

## DIMENSIONS

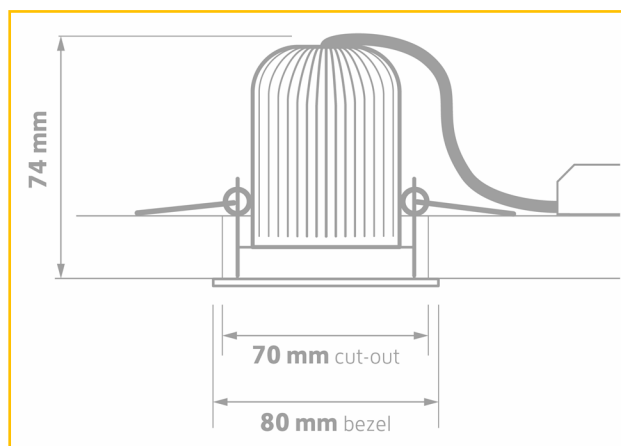

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CLG/8/3K/WH	8W	3000	750LM
CLG/8/4K/WH	8W	4000	775LM


OPTIONS	DESCRIPTION
/MDIM	PHASE-CUT DIMMING
/DALI	ADDRESSABLE/TOUCH DIM
/BTC	CASAMBI WIRELESS CONTROL
/M3	3HR EMERGENCY
/EMD	3HR DALI MONITORED EMERGENCY

Ordering Format: Product Code / Option

Example: CLG/8/3K/WH/MDIM



# Capri - LIN

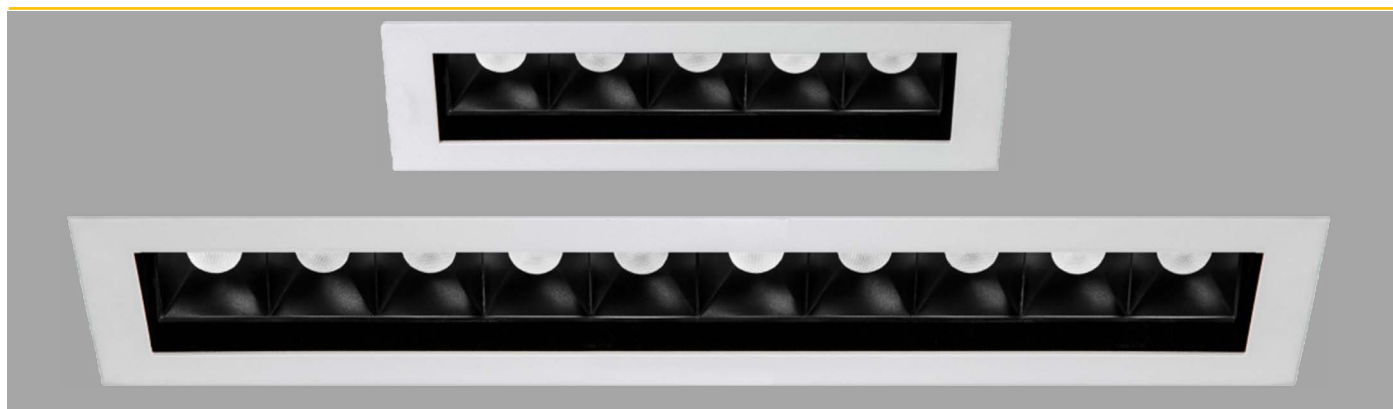


## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Samsung LH351 chip set
- High clarity micro prismatic
- 35° medium beam lens

## APPLICATIONS

- Domestic dwellings
- Corridors
- Displays
- Receptions

## DIMENSIONS

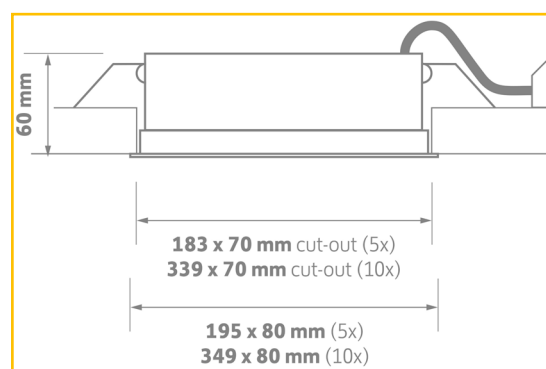

## CONSTRUCTION

- Extruded aluminium super-fin heatsink
- Injection moulding low glare matt black baffle
- Die-cast aluminium bezel epoxy powder Coated white

## ACCESSORIES



Fittings with emergency pod

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CLI/5/30/BK/WH	13W	3000	1075LM
CLI/5/40/BK/WH	13W	4000	1075LM
CLI/10/30/BK/WH	23W	3000	2150LM
CLI/10/40/BK/WH	23W	4000	2150LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/DALI	ADDRESSABLE / TOUCH DIM
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)
/9	RA 90 COLOUR RENDERING
/WSB	WHITE SOFTLIGHT BAFFLE
/NB	NARROW BEAM

Ordering Format: Product Code / Option

Example: CLI/5/30/BK/WH/M3





# Capri NT



## APPLICATIONS

- Show Rooms
- Corridors
- Displays
- Receptions
- Toilets


## CONSTRUCTION

- Extruded Aluminium housing
- Clear PMMA diffuser
- Epoxy powder coated White, Anthracite, Black

## TECHNICAL DETAILS

- CRI>80
- 30° reflector as standard
- CCT colour option 3000K, 4000K
- Life > 60,000h L90/B10

## DIMENSIONS

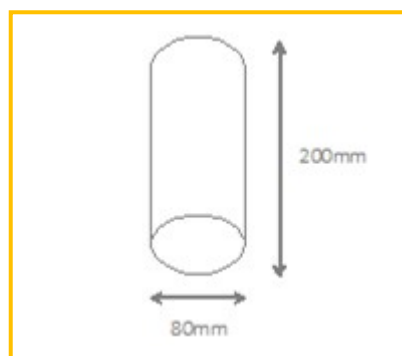

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CN200/15/3K/**	15W	3000K	1420LM
CN200/15/4K/**	15W	4000K	1460LM
CN200/21/3K/**	21W	3000K	1960LM
CN200/21/4K/**	21W	4000K	2020LM
CN200/29/3K/**	29W	3000K	2550LM
CN200/29/4K/**	29W	4000K	2630LM

OPTIONS	DESCRIPTION
/PCV	PRODUCT COLOUR VARIATION
/50	50° REFLECTOR
/70	70° REFLECTOR

Ordering Format: Product Code / Option  
Example: CN200/15/3K/50/RAL9006



# Capri - 60



## CONSTRUCTION

- Spun aluminium body epoxy powder coated White or Black
- Reflector colour options


## APPLICATIONS

- Bedrooms
- Corridors Displays
- Art
- Receptions

## TECHNICAL DETAILS

- CRI>97
- CCT colour option 2700K, 3000K, 4000K
- Philips Expert Lamp
- 40,000hr life

## DIMENSIONS

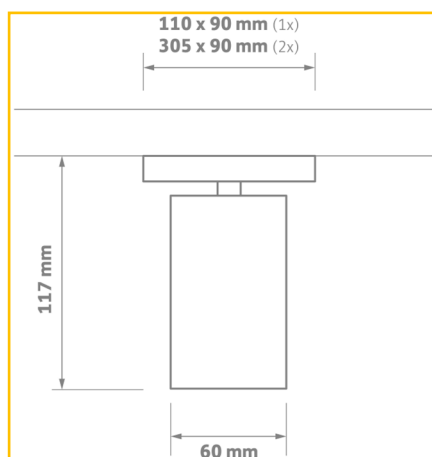

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C60/27/**/**	5.5W	2700K	355LM
C60/30/**/**	5.5W	3000K	375LM
C60/40/**/**	5.5W	4000K	400LM

OPTIONS	DESCRIPTION
/BK	BLACK BODY
/WB	WHITE BAFFLE
/GB	GOLD BAFFLE
/TW	TWIN BODY
/TK	3 CIRCUIT TRACK MOUNT

\*\* Specify body colour and reflector colour example: C60/27/WH/GB\*\*



# Capri - 60

## ACCESSORIES



/BK/BK



/BK/GO



/BK/WH



/WH/BK



/WH/GO



/WH/WH



/WH/BK



/BK/WH



/WH/GO

# Capri - 70



## APPLICATIONS

- Domestic dwelling
- Corridors
- Displays
- Receptions


## CONSTRUCTION

- Thermal optimised aluminium heat sink
- Injection moulded faceted reflector
- Die-cast aluminium bezel epoxy powder Coated white

## TECHNICAL DETAILS

- CRI>80
- 36° reflector as standard
- CCT colour option 3000K, 4000K
- Life > 50,000h L70/F50
- Osram Flex dip driver

## DIMENSIONS

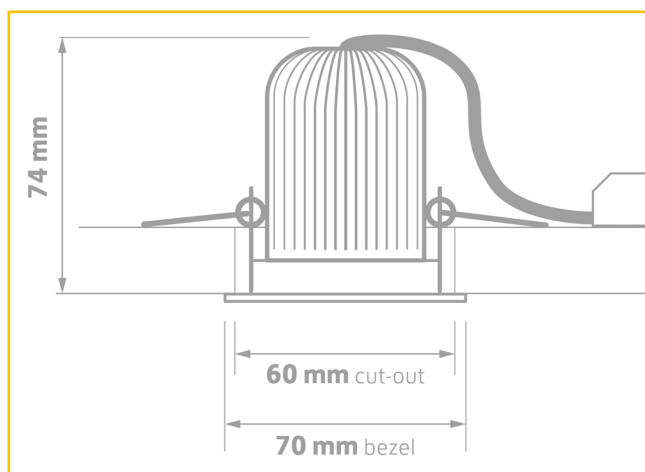

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C70/8/3K/WH	8W	3000	750LM
C70/8/4K/WH	8W	4000	775LM


OPTIONS	DESCRIPTION
/MDIM	PHASE CUT DIMMING
/DALI	ADDRESSABLE DIMMING
/BTC	CASAMBI WIRELESS CONTROL
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY

Ordering Format: Product Code / Option  
Example: C70/8/3K/WH/EM





# Capri - 76

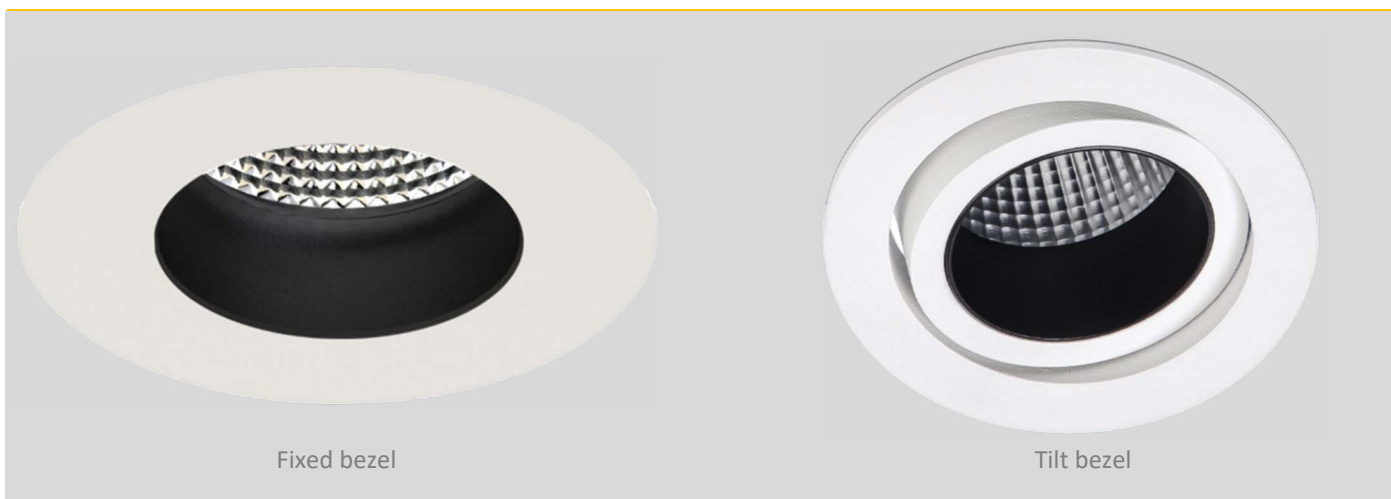

Fixed bezel

Tilt bezel

## APPLICATIONS

- Classrooms
- Corridors
- Displays
- Receptions


## CONSTRUCTION

- Thermal optimised aluminium heat sink
- Multi facet moulded polycarbonate reflector
- Die-cast aluminium bezel epoxy powder Coated white or black

## TECHNICAL DETAILS

- CRI>80
- 40° reflector as standard
- CCT colour option 2700, 3000K, 4000K
- Life > 60,000h L70/F10
- Tridonic Driver
- Tridonic Chip set

## DIMENSIONS

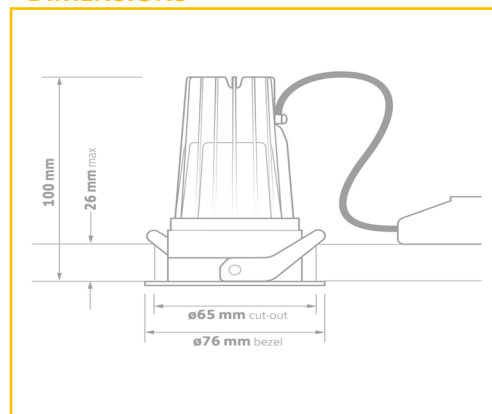

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C76/500/27/WH	8.5W	2700	500LM
C76/625/30/WH	8.5W	3000	625LM
C76/650/40/WH	8.5W	4000	650LM
C76/675/27/WH	10.5W	2700	675LM
C76/800/30/WH	10.5W	3000	800LM
C76/825/40/WH	10.5W	4000	825LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY CONVERSION
/DALI	TOUCH DIMMING/DALI
/9	RA90 COLOUR RENDERING
/NB	20° BEAM REFLECTOR
/T	TILTABLE BEZEL
/54	IP54 RIBBED GLASS
/GB	GOLD BAFFLE
/WSB	WHITE BAFFLE
/HC	HONEYCOMBE LOUVRE

Ordering Format: Product Code / Option

Example: C76/500/27/WH/EM



# Capri - 80



## APPLICATIONS

- Domestic dwelling
- Corridors
- Displays
- Receptions


## CONSTRUCTION

- Thermal optimised aluminium heat sink
- Injection moulded faceted reflector
- Die-cast aluminium bezel epoxy powder Coated white

## TECHNICAL DETAILS

- CRI>80
- 36° reflector as standard
- CCT colour option 3000K, 4000K
- Life > 50,000h L70/F50
- Osram Flex dip driver

## DIMENSIONS

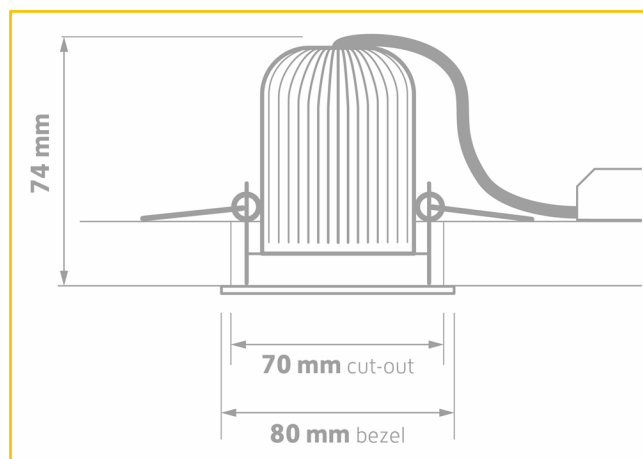

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C80/8/3K/WH	8W	3000	750LM
C80/8/4K/WH	8W	4000	775LM

OPTIONS	DESCRIPTION
/MDIM	PHASE CUT DIMMING
/DALI	ADDRESSABLE DIMMING / TOUCH
/BTC	CASAMBI WIRELESS CONTROL
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY

Ordering Format: Product Code / Option

Example: C80/8/3K/WH/EM



# Capri - 85



## APPLICATIONS

- Bedrooms
- Corridors
- Functions suite
- Receptions


## TECHNICAL DETAILS

- CRI>80
- CCT colour option 2700, 3000K, 4000K
- Tridonic Driver
- Tridonic full spectrum SLE Chip set

## CONSTRUCTION

- Die-cast aluminium 24 super fin body epoxy powder coated black
- Aluminium reflector matt black to minimise glare
- Minimal aluminium die-cast bezel epoxy Powder coated white

## DIMENSIONS

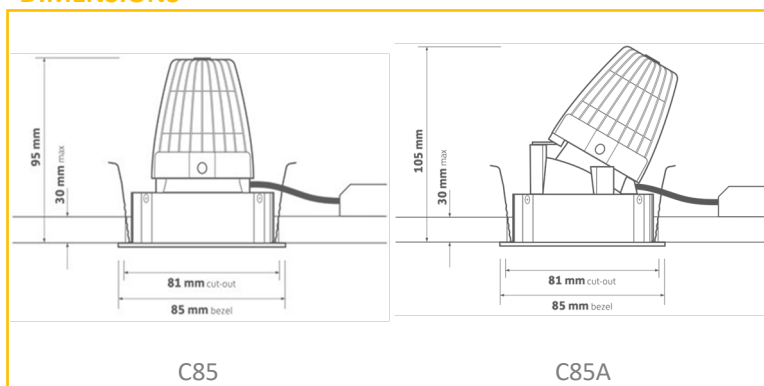


PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C85/650/30/WH	8W	3000K	650LM
C85/650/40/WH	8W	4000K	650LM
C85/850/30/WH	10W	3000K	850LM
C85/850/40/WH	10W	4000K	850LM
C85A/650/30/WH	8W	3000K	650LM
C85A/650/40/WH	8W	4000K	650LM
C85A/850/30/WH	10W	3000K	850LM
C85A/850/40/WH	10W	4000K	850LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/WSB	WHITE SOFTLIGHT BAFFLE
/NB	NARROW BEAM
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option  
Example: C85/650/30/WH/EMI





# Capri - 85S

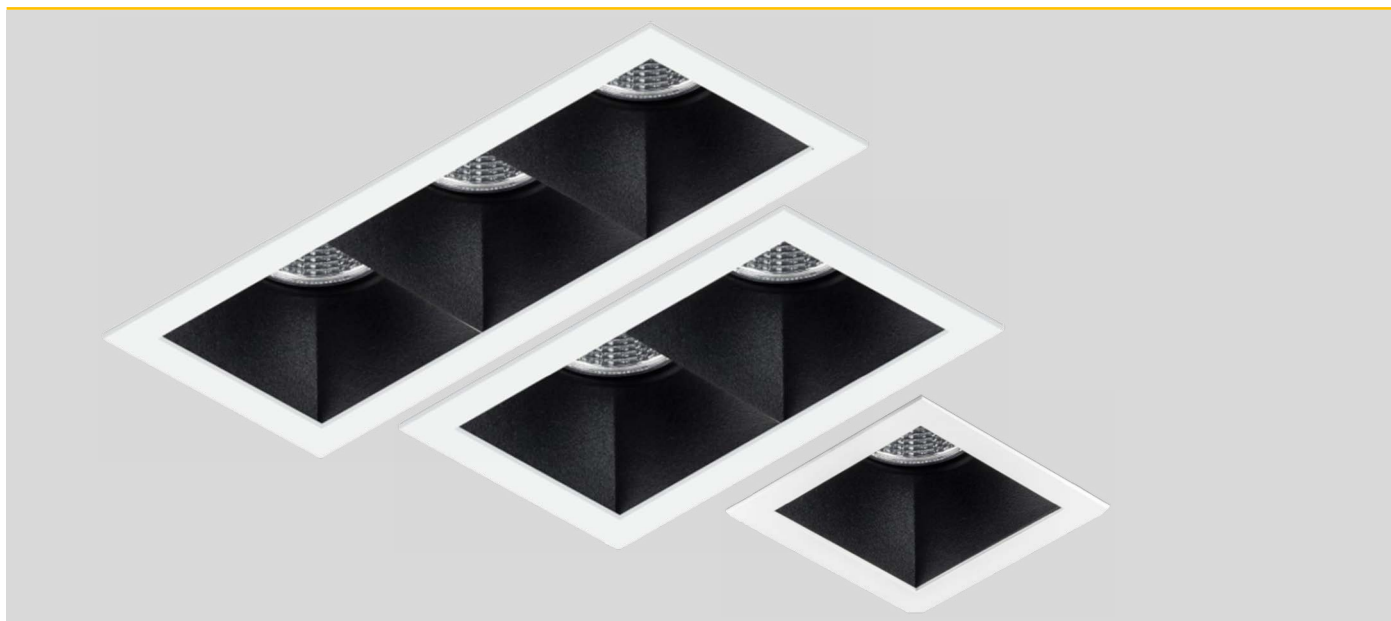

## APPLICATIONS


- Bedrooms
- Corridors
- Functions suite
- Receptions

## DIMENSIONS

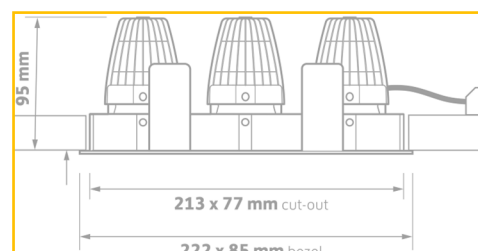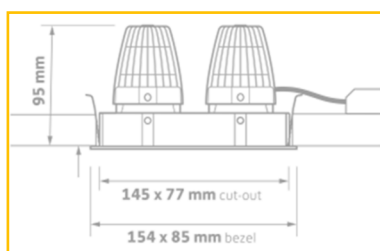

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Tridonic full spectrum SLE Chip set



PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CS85/1/650/30/WH	8W	3000K	650LM
CS85/1/650/40/WH	8W	4000K	650LM
CS85/2/1300/30/WH	15W	3000K	1300LM
CS85/2/1300/40/WH	15W	4000K	1300LM
CS85/3/1975/30/WH	25W	3000K	1975LM
CS85/3/1975/40/WH	25W	4000K	1975LM
CS85/3/2575/30/WH	34W	3000K	2575LM
CS85/3/2575/40/WH	34W	4000K	2575LM

## CONSTRUCTION

- Die-cast aluminium 24 super fin body epoxy powder coated black
- Aluminium reflector matt black to minimise glare
- Minimal aluminium die-cast bezel epoxy Powder coated white


OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY CONVERSION
/WSB	WHITE SOFTLIGHT BAFFLE
/NB	NARROW BEAM
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL
/PI	PLASTER IN BEZEL
/9	Ra 90 COLOUR RENDERING

Ordering Format: Product Code / Option

Example: CS85/1/650/30/WH/EM



# Capri - 130

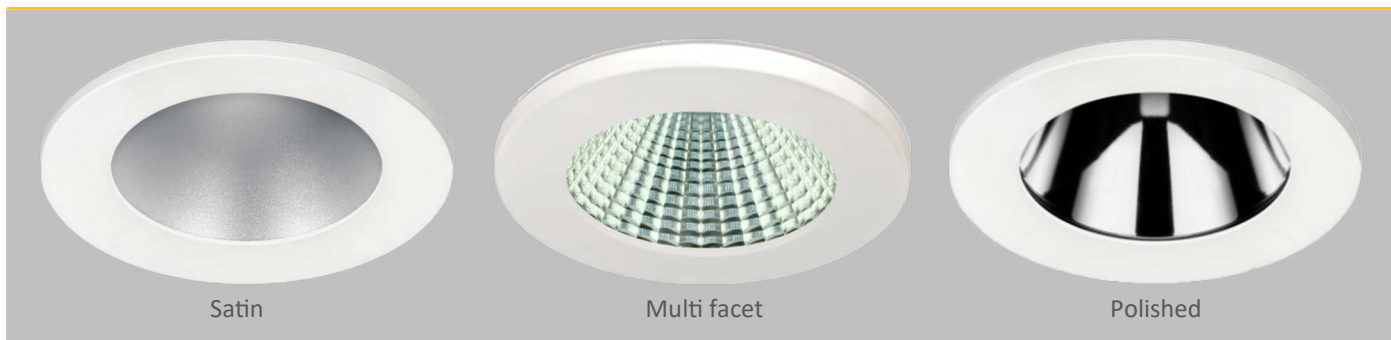

## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions


## CONSTRUCTION

- Die-cast aluminium body epoxy powder coated black
- Aluminium reflector
- Die-cast aluminium twist lock bezel epoxy Powder coated white


## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Philips Driver
- Philips SLM Chip set

## ACCESSORIES

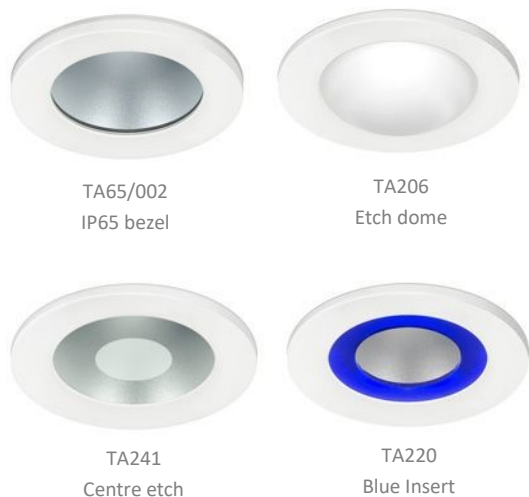

## DIMENSIONS

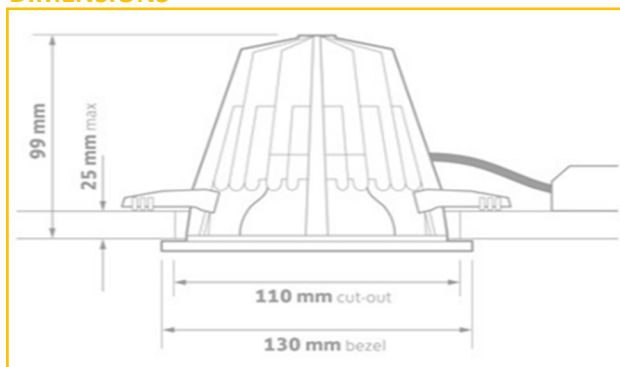

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C130/600/30/WH	7W	3000K	600LM
C130/600/40/WH	7W	4000K	600LM
C130/1100/30/WH	12W	3000K	1150LM
C130/1100/40/WH	12W	4000K	1150LM
C130/1800/30/WH	18W	3000K	1800LM
C130/1800/40/WH	18W	4000K	1800LM
C130/2300/30/WH	27W	3000K	2375LM
C130/2300/40/WH	27W	4000K	2375LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C130/600/30/WH/M3





# Capri - 150




## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Tridonic Chip set

## DIMENSIONS

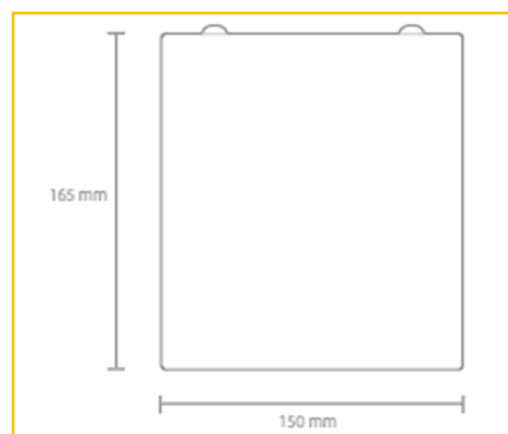

## CONSTRUCTION

- Spun aluminium body epoxy powder coated White, Grey or Black
- Reflector Options

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C150/1000/30/WH	8W	3000K	1025LM
C150/1000/40/WH	8W	4000K	1050LM
C150/1700/30/WH	14W	3000K	1725LM
C150/1700/40/WH	14W	4000K	1775LM
C150/2400/30/WH	19W	3000K	2325LM
C150/2400/40/WH	19W	4000K	2400LM

OPTIONS	DESCRIPTION
/BK	BLACK BODY RAL9005
/GY	GREY BODY FINISH RAL 9006
/M3	3HR MAINTAINED EMERGENCY
/MF25	25° MULTI FACET REFLECTOR
/MF60	60° MULTI FACET REFLECTOR
/SP40	40° SPECULAR REFLECTOR
/SA50	50° SATIN REFLECTOR
/DALI	SWITCHDIM/DALI DIMMING
/SUS	SUSPENSION KIT

## ACCESSORIES



/SUS  
2m Suspension Kit



/MF25 Or /MF60 Multi Facet Reflector  
/SA50 Satin Reflector  
/SP40 Specular Reflector



Ordering Format: Product Code / Option  
Example: C150/1000/30/WH/BK

# Capri - 170



Anti-Vandal

Architectural & Feature

Downlighters

Emergency


Exterior

Recessed

Surface & Wall

Suspended

Track

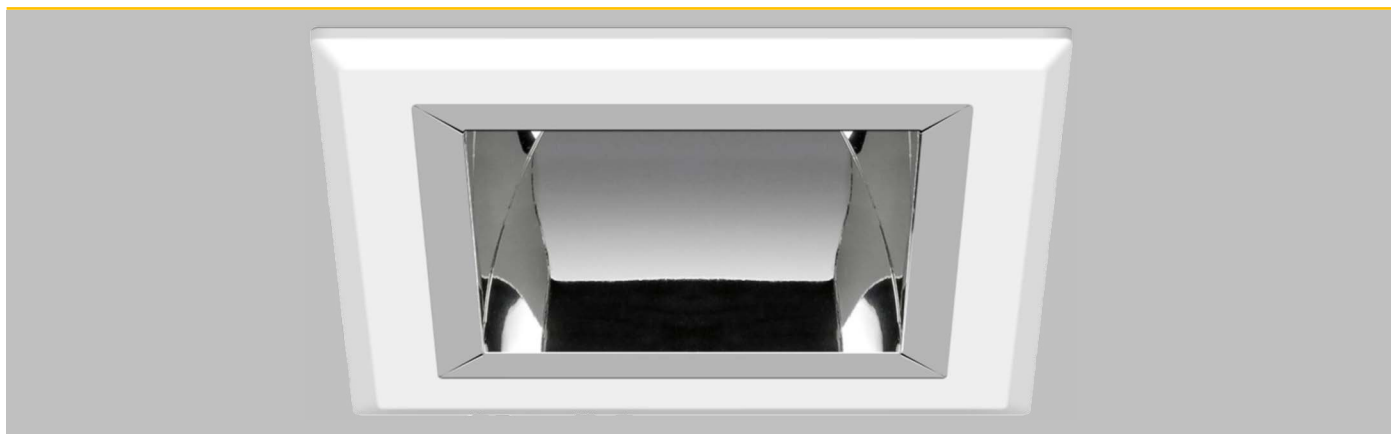


## APPLICATIONS

- Classrooms
- Corridors
- Meeting rooms
- Receptions

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Tridonic DLE Chip set

## DIMENSIONS

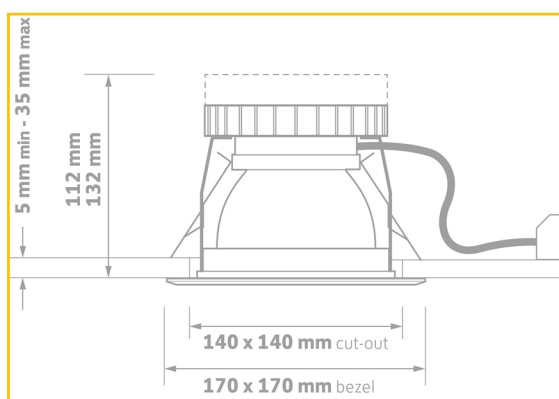

## CONSTRUCTION


- Fabricated sheet metal work epoxy powder coated white
- High specular aluminium reflector outstanding efficiency of 96%
- Die-cast aluminium UB bezel epoxy powder coated white

## ACCESSORIES



DA001

Clear polycarbonate



DA002

Fully etched polycarbonate



DA003

Clear polycarbonate halo



DA004

Etched Halo

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C170/1100/30/WH	9W	3000	1309
C170/1100/40/WH	8W	4000	1209
C170/2000/30/WH	16W	3000	2162
C170/2000/40/WH	15W	4000	2136
C170/30/3000/WH	22W	3000	3077
C170/40/3000/WH	22W	4000	3241

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY CONVERSION
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C170/1100/30/WH/M3



# Capri - 186




## APPLICATIONS

- Gallery
- Corridors
- Museum
- Reception

## TECHNICAL DETAILS

- CRI>90
- CCT colour option 3000K, 4000K
- Philips Driver
- Philips Pure white chip set


## DIMENSIONS

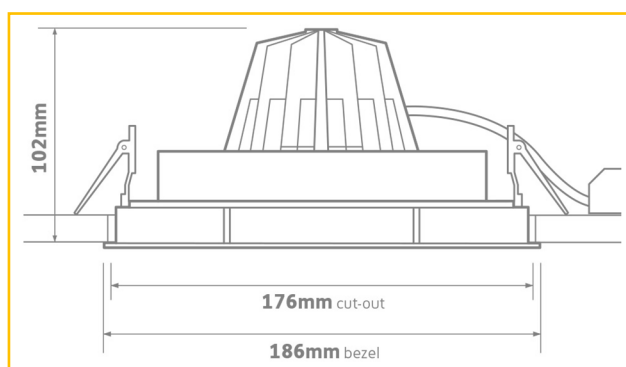

## CONSTRUCTION


- Die-cast aluminium body epoxy powder coated white
- 40° Multi faceted aluminium reflector
- Die-cast aluminium bezel epoxy powder Coated white

## ACCESSORIES

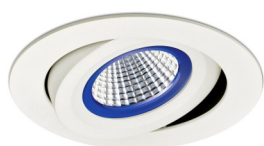

TA220

Blue halo bezel

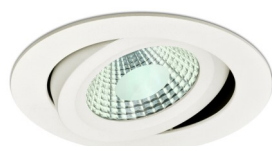

TA241

Centre etched



TA242

Fully etched glass

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C186/650/30/WH	6W	3000K	650LLM
C186/650/40/WH	6W	4000K	650LLM
C186/1200/30/WH	12W	3000K	1175LLM
C186/1200/40/WH	12W	4000K	1175LLM
C186/2000/30/WH	18W	3000K	1850LLM
C186/2000/40/WH	18W	4000K	1850LLM
C186/2500/30/WH	27W	3000K	2500LLM
C186/2500/40/WH	27W	4000K	2500LLM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)
/MF25	25° MULTI-FACETED REFLECTOR
/MF60	60° MULTI-FACETED REFLECTOR
/SP40	40° SPECULAR REFLECTOR
/SA50	50° SATIN REFLECTOR

Ordering Format: Product Code / Option

Example: C186/650/30/WH/EM



# Capri - 195




## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Tridonic Chip set

## DIMENSIONS

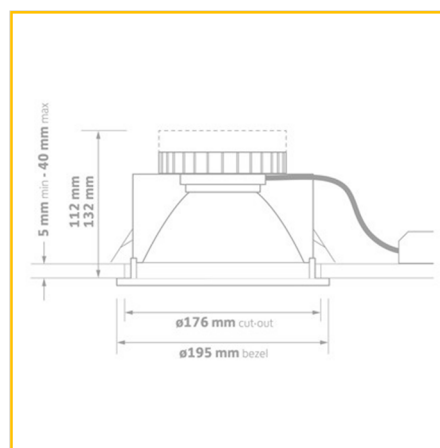

## CONSTRUCTION

- Fabricated sheet metal work epoxy powder coated white
- Aluminium reflector
- Die-cast aluminium bezel epoxy powder coated white

## ACCESSORIES



IP65/002/195

IP65 clear glass



IP65/008/195

IP65 opal glass



TA342

IP54 Fully etched glass



TA305

Glass halo



TA344

IP54 Opal polycarbonate



CBC300

Custom bezel RAL

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C195/1000/30/WH	9.5W	3000K	989LM
C195/1000/40/WH	9.5W	4000K	1001LM
C195/2000/30/WH	17.5W	3000K	1763LM
C195/2000/40/WH	17.5W	4000K	1784LM
C195/3000/30/WH	27W	3000K	2709LM
C195/3000/40/WH	27W	4000K	2741LM
C195/4000/30/WH	46.5W	3000K	4177LM
C195/4000/40/WH	46.5W	4000K	4480LM


OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C195/1000/30/WH/M3



# Capri - 232

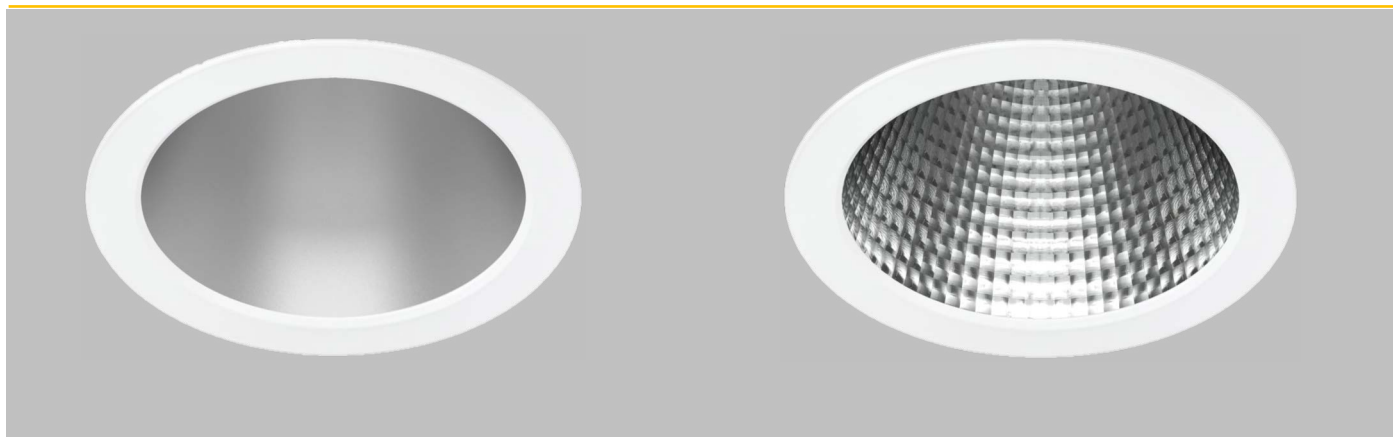


## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Xitanium Driver
- Philips DLM Flex Chip set

## DIMENSIONS

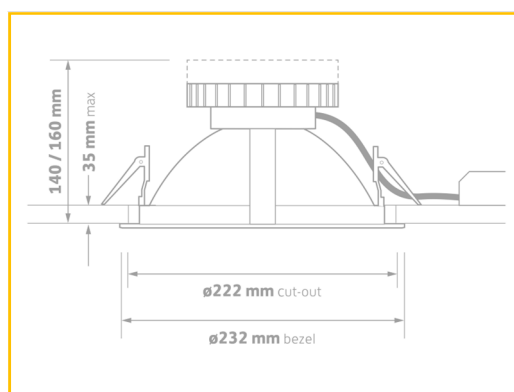

## CONSTRUCTION

- Fabricated sheet metal work epoxy powder coated white
- Aluminium reflector
- Die-cast aluminium bezel epoxy powder coated white

## ACCESSORIES



IP65 Facet



IP65 Satin

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C232/1100/30/WH	15W	3000K	1100LM
C232/1100/40/WH	15W	4000K	1100LM
C232/2000/30/WH	25W	3000K	2000LM
C232/2000/40/WH	25W	4000K	2000LM
C232/3000/30/WH	34W	3000K	3000LM
C232/3000/40/WH	34W	4000K	3000LM
C232/4000/30/WH	49W	3000K	4100LM
C232/4000/40/WH	49W	4000K	4100LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C232/1100/30/WH/M3





# Capri - 240



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



/TA343

Clear glass

/SUS

2m suspension kit

/CBC

Custom body colour


## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

## TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Philips Driver
- DLM Flex Chip set

## DIMENSIONS

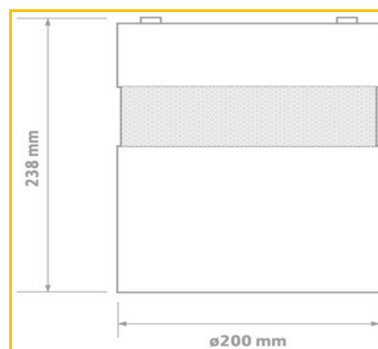

## CONSTRUCTION

- Spun aluminium body epoxy powder coated White, Grey or Black
- Reflector Options

## ACCESSORIES



/TA341

Centre etched glass

/TA344

Fully etched glass

\*Note glass attachments are factory fit only\*

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C240/1200/30/WH	12W	3000K	1200LM
C240/1200/40/WH	12W	4000K	1200LM
C240/2000/30/WH	25W	3000K	2000LM
C240/2000/40/WH	25W	4000K	2000LM
C240/2800/30/WH	34W	3000K	2825LM
C240/2800/40/WH	34W	4000K	2825LM
C240/3400/30/WH	48W	3000K	3875LM
C240/3400/40/WH	48W	4000K	3874LM

OPTIONS	DESCRIPTION
/DALI	TOUCH DIM / DALI
/M3	3HR EMERGENCY
/GY	GREY BODY FINISH
/BK	BLACK BODY FINISH
/SR	SPECULAR REFLECTOR
/PR	POLISHED REFLECTOR


Ordering Format: Product Code / Option

Example: C240/1200/30/WH/DALI





# Capri - 244

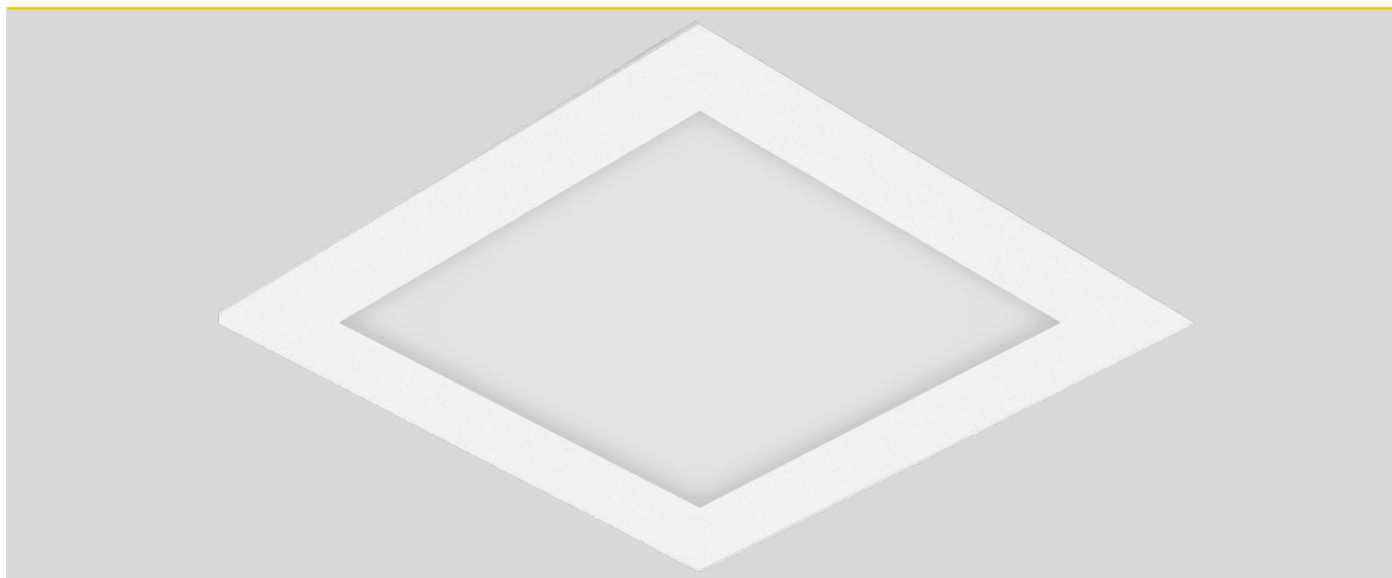

## APPLICATIONS

- Hospitals
- Offices
- Schools
- Receptions


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Various Wattages
- Tridonic CLE board
- Tridonic driver

## CONSTRUCTION

- Fabricated sheet metal housing epoxy powder coated white
- Ultra-thin bezel to minimise visual impact
- High transmission acrylic diffuser

## DIMENSIONS

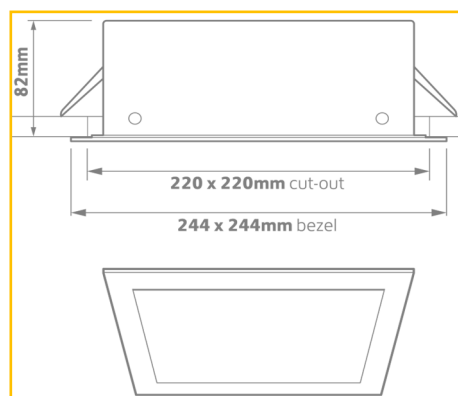

PRODUCT CODE	DESCRIPTION
C244/600/30/WH	CAPRI 244 5W 600LM 3000K WHITE BEZEL
C244/600/40/WH	CAPRI 244 5W 600LM 4000K WHITE BEZEL
C244/1300/30/WH	CAPRI 244 10W 1300LM 3000K WHITE BEZEL
C244/1300/40/WH	CAPRI 244 10W 1300LM 4000K WHITE BEZEL
C244/1800/30/WH	CAPRI 244 15W 1800LM 3000K WHITE BEZEL
C244/1800/40/WH	CAPRI 244 15W 1800LM 4000K WHITE BEZEL

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING / TOUCH DIM
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C244/600/30/WH/DALI





## APPLICATIONS

- Corridors
- Toilets
- Canteens
- Receptions


## CONSTRUCTION

- Die-cast aluminium body epoxy powder coated White
- Satin opal PC diffuser
- IP54

## TECHNICAL DETAILS

- CRI>80
- Switchable CCT 3000K,4000K,5500K
- Tridonic Driver
- SMD Chip set

## DIMENSIONS

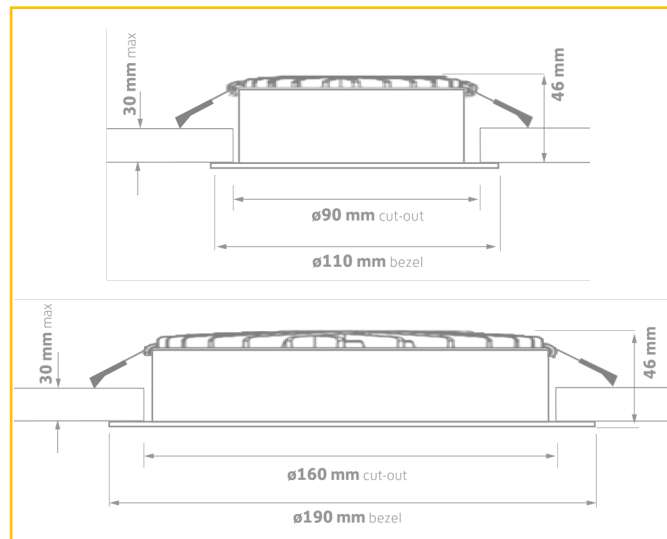

PRODUCT CODE	LUMENS	L	A	H
CES/9/4K/OP/WH	850LM	110	46	90
CEL/11/4K/OP/WH	1200LM	190	46	160
CEL/21/4K/OP/WH	2275LM	190	46	160

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/DALI	ADDRESSABLE / TOUCH DIM
/MDIM	MAINS DIMMING

Ordering Format: Product Code / Option  
 Example: CES/9/4K/OP/WH/DALI




# Capri - FR85



## APPLICATIONS

- Domestic dwellings
- Offices
- Schools
- Receptions

## DIMENSIONS

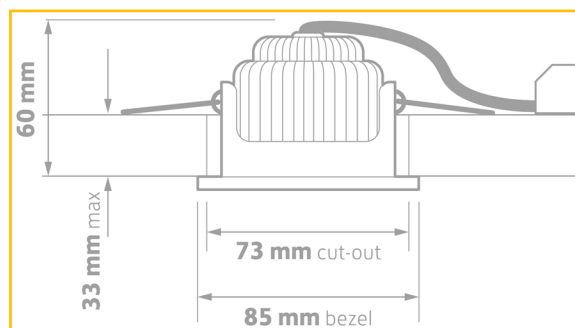

## CONSTRUCTION

- Finned die-cast housing epoxy powder Coated black
- Multi facet reflector
- Die-cast bezel epoxy powder coated

PRODUCT CODE	DESCRIPTION
CFR85/3K/WH	CAPRI FR85 9W 575LM 3000K WHITE BEZEL
CFR85/4K/WH	CAPRI FR85 9W 575LM 4000K WHITE BEZEL

## TECHNICAL DETAILS


- CRI>80
- Accredited fire rating FR30,FR60 and FR90  
In accordance with BS476:Part 21 1987
- CCT 3000K, 4000K
- Various Wattages

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE / TOUCH DIM
/M3	3HR EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)
/BK	BLACK BEZEL
/BA	BRUSHED ALUMINIUM BEZEL

Ordering Format: Product Code / Option  
Example: CFR85/3K/WH/DALI



# Chilli

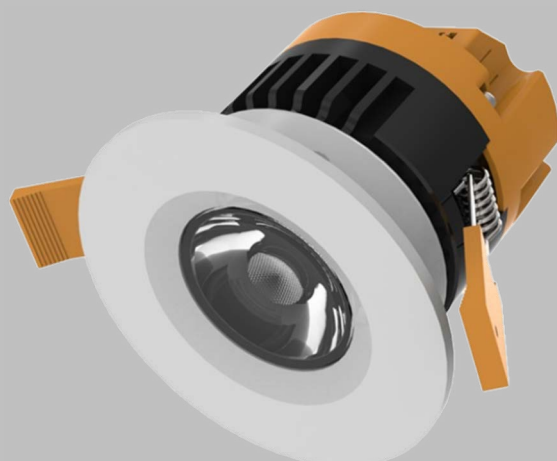

## APPLICATIONS

- Domestic dwellings
- Offices
- Schools
- Receptions


## CONSTRUCTION

- Die-Cast aluminium bezel with steel body
- Twist lock IP65 bezel with colour options
- glass lens

## TECHNICAL DETAILS

- Accredited fire rating FR30,FR60 and FR90  
In accordance with BS476:Part 21 1987
- COB LED
- Dimmable with triac dimmer
- 3 CCT Changeable via DIP switches

## DIMENSIONS

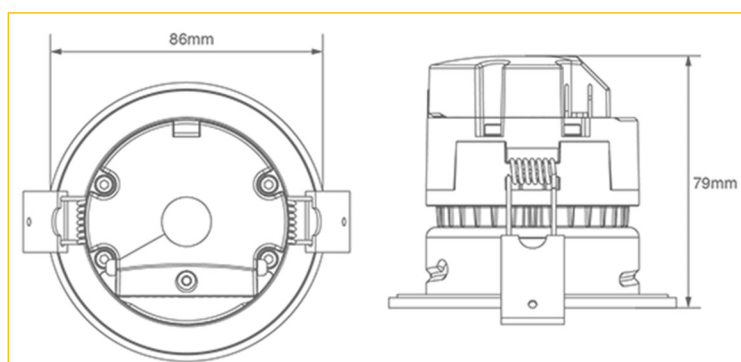


PRODUCT CODE	DESCRIPTION
CHI/6/CCT/WH	CHILLI 6W 550LM FIRE RATED DOWNLIGHTER

OPTIONS	DESCRIPTION
/CH	CHROME BEZEL
/SCH	SATIN CHROME BEZEL

Ordering Format: Product Code / Option  
Example: CHI/6/CCT/SCH



# Cicero

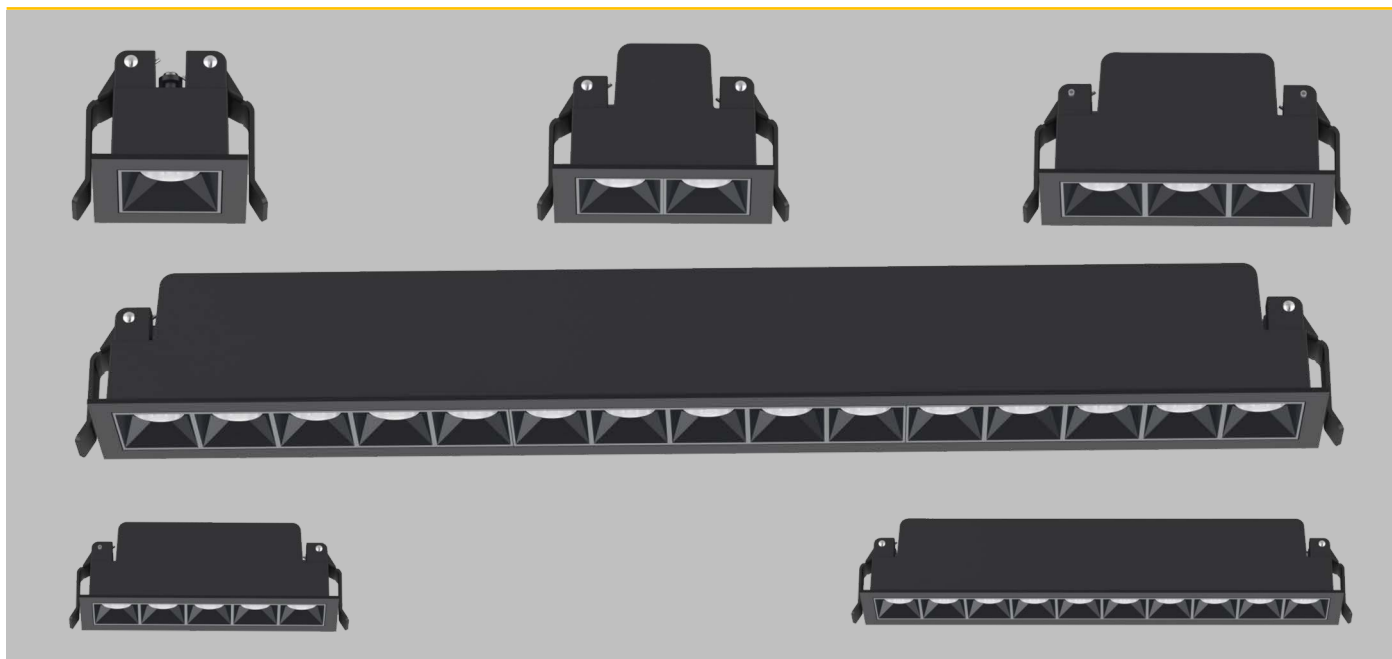

## APPLICATIONS

- Board Rooms
- Corridors
- Functions suite
- Receptions

## CONSTRUCTION

- Die-Cast aluminium body epoxy Powder coated Black RAL9005
- low Glare UGR<19

## TECHNICAL DETAILS

- CRI>90
- CCT colour option 2700K, 4000K
- 36° Reflector
- CREE XP-G2 Chip set

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CIC1/4/4K/BK	4W	2700 / 4000K	140LM (827) / 190LM (840)
CIC2/6/4K/BK	6W	2700 / 4000K	270LM (827) / 370LM (840)
CIC3/9/4K/BK	9W	2700 / 4000K	400LM (827) / 600LM (840)
CIC5/13/4K/BK	13W	2700 / 4000K	650LM (827) / 940LM (840)
CIC10/25/4K/BK	25W	2700 / 4000K	1220LM (827) / 1820LM (840)
CIC15/37/4K/BK	37W	2700 / 4000K	1990LM (827) / 2830LM (840)

\*Suffix 4K to 2K for 2700 Kelvin\*

OPTIONS	DESCRIPTION
/DALI	TOUCH DIM / DALI
/BTC	CASAMBI WIRELESS CONTROL







Ordering Format: Product Code / Option

Example: CIC1/4/4K/BK/DALI



# Cicero

## DIMENSIONS

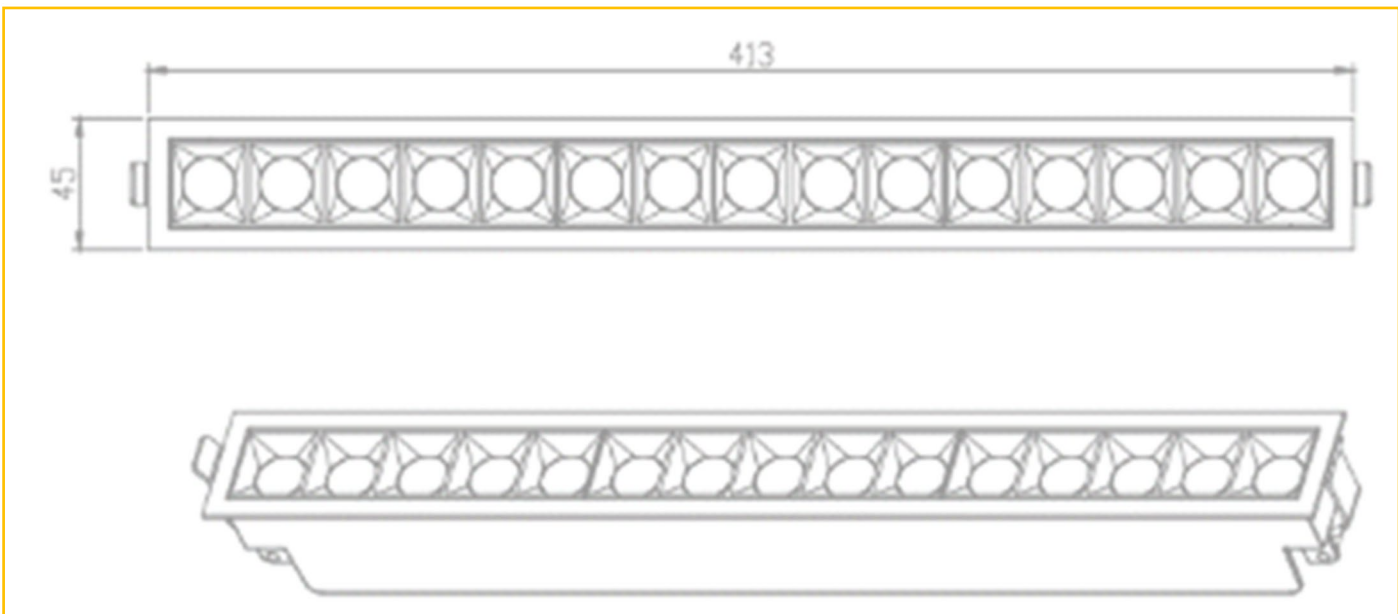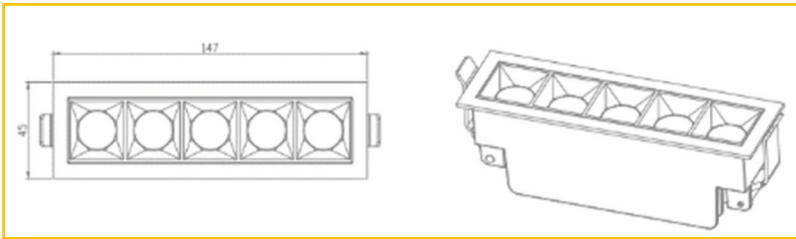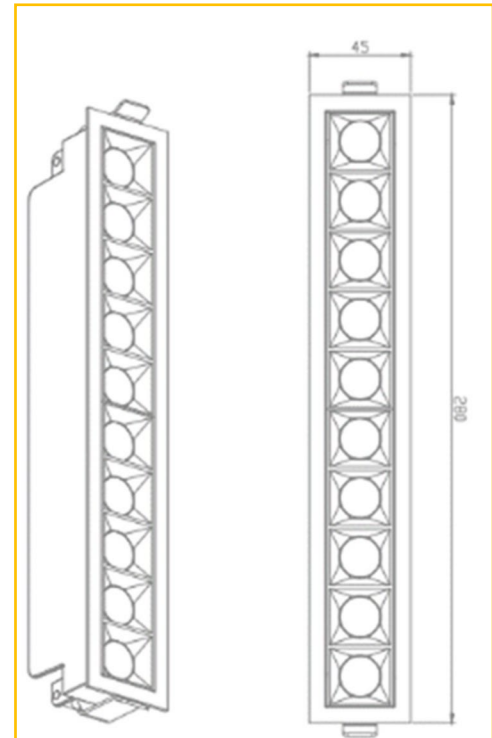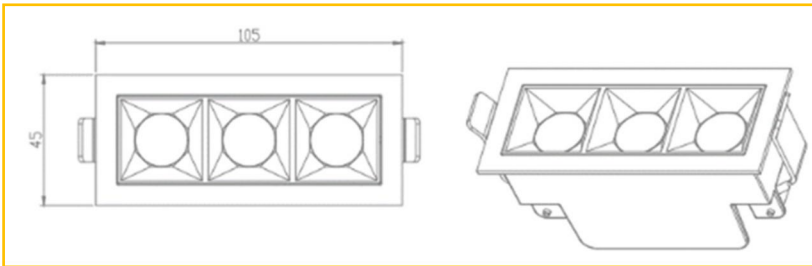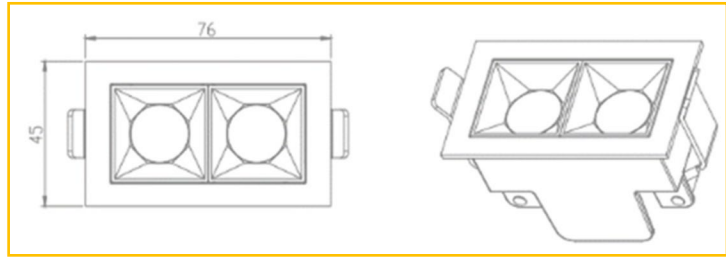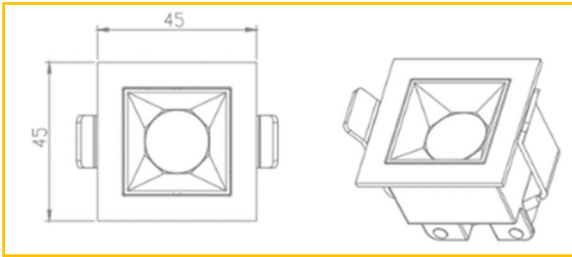



# HALO 232




## APPLICATIONS

- Pasterboard Ceiling
- Metal Pan Ceiling


## CONSTRUCTION

- Laser cut mild steel
- Epoxy powder coated white as standard but other options available

## DIMENSIONS

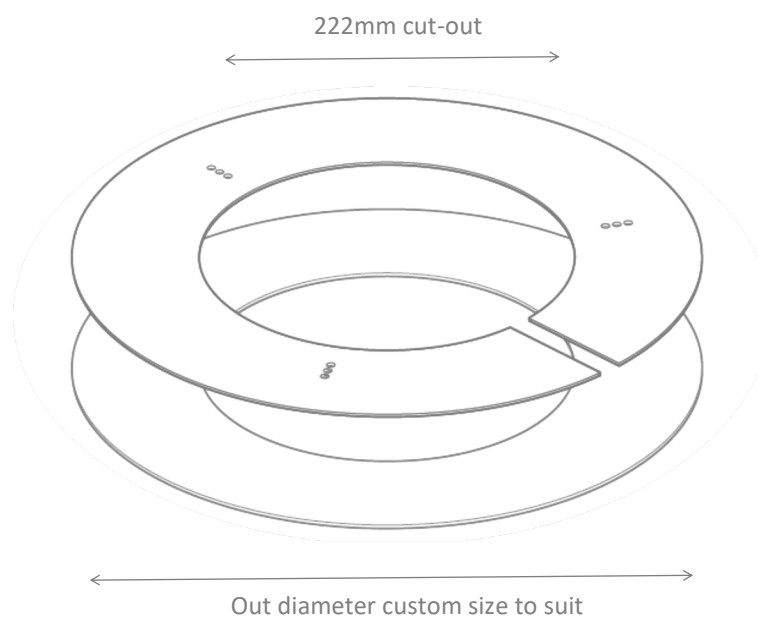

# Emergency

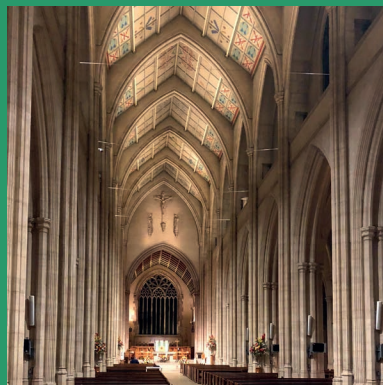

Track

Suspended

Surface & Wall

Recessed

Exterior


Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Android

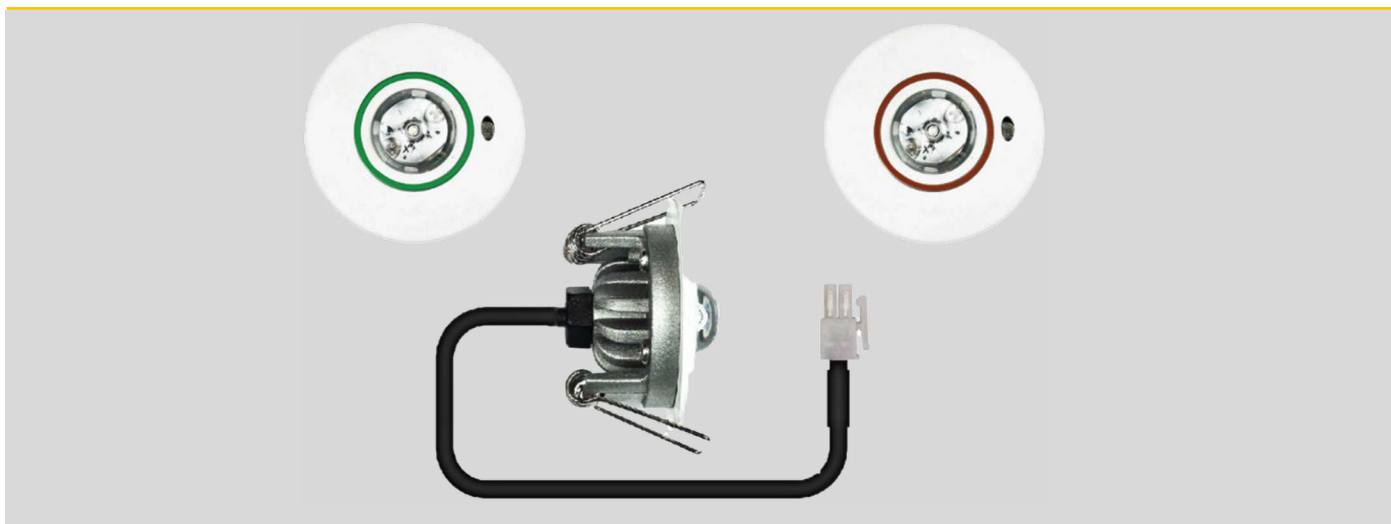


## APPLICATIONS

- Escape routes
- Open areas

## CONSTRUCTION

- Injection moulded polycarbonate bezel
- Clear polycarbonate optic
- Finned aluminium heat sink

## DIMENSIONS

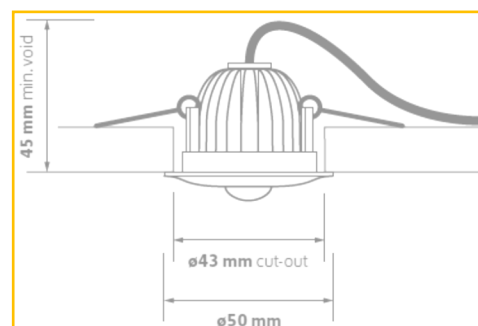

## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Lithium Battery technology LiFePO4
- Open area 266 lumen
- Corridor 268 lumen
- Non Optic 237 lumen

PRODUCT CODE	DESCRIPTION
LP6/3/OA	3W NM3 C/W OPEN AREA OPTIC 266LM
LP6/3/CR	3W NM3 C/W CORRIDOR OPTIC 268LM
LP6/3/NL	3W NM3 NON-OPTIC 237LM

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TESTING EMERGENCY
/54	IP54
/BK	BLACK BEZEL

Ordering Format: Product Code / Option

Example: LP6/3/OA/D3

## OPEN AREA OPTIC

Mounting	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
Height				
2.5m	3.9m	3.6m	8.2m	7.6m
3.0m	4.5m	4.1m	9.4m	8.7m
4.0m	5.5m	4.8m	11.8m	10.9m
5.0m	6.4m	5.0m	14.0m	12.6m
6.0m	6.9m	3.1m	16.0m	13.3m
8.0m	6.0m	-	18.9m	8.5m

## CORRIDOR OPTIC

Mounting	To Wall		Between Fittings	
	0.5 Lux	1.0 Lux	0.5 Lux	1.0 Lux
Height				
2.5m	5.2m	4.6m	11.9m	10.2m
3.0m	5.8m	5.1m	13.1m	11.4m
4.0m	6.9m	5.8m	15.6m	13.7m
5.0m	7.9m	5.0m	18.0m	15.5m
6.0m	8.3m	4.2m	20.1m	15.5m
8.0m	6.5m	-	21.9m	12.7m





## APPLICATIONS

- Exit points


## TECHNICAL DETAILS

- CCT 5000K
- CRI >80
- Lithium LiFePO4 battery technology
- Viewing distance 30mtrs

## CONSTRUCTION

- Injection moulded ultra low profile body
- Flame retardant polycarbonate legend panel
- Body colour option - White Or Black

## DIMENSIONS

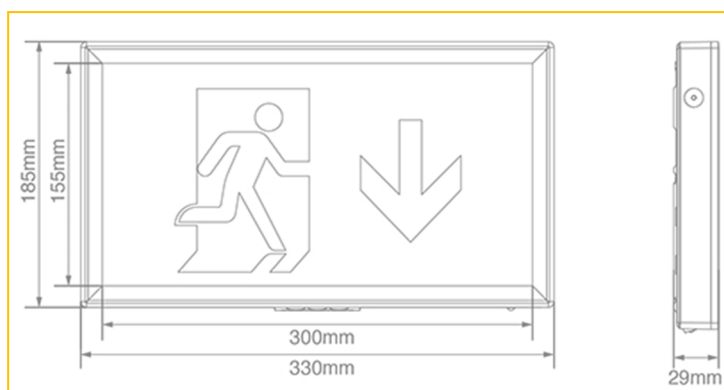

PRODUCT CODE	DESCRIPTION
CLF/M3	CLIFFE 4W MAINTAINED C/W LEGEND PACK


OPTIONS	DESCRIPTION
/STE	SELF-TEST EMERGENCY
/BK	BLACK BODY

Ordering Format: Product Code / Option

Example: CLF/M3/STE




# ECO-B

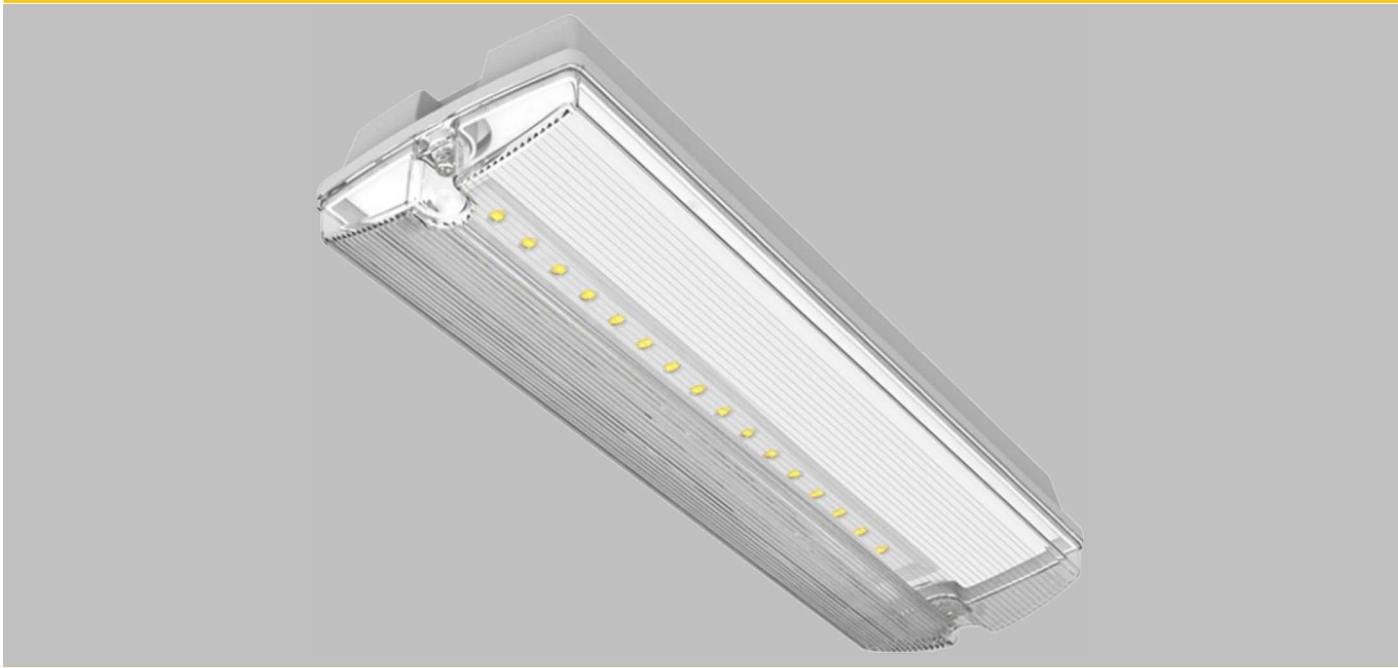

## APPLICATIONS

- Escape routes
- External doors

## DIMENSIONS

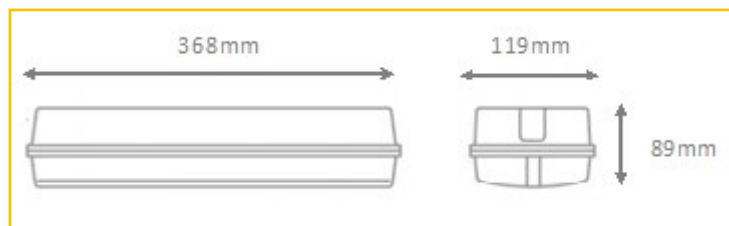

## TECHNICAL DETAILS

- CCT 5000K
- CRI >80

PRODUCT CODE	DESCRIPTION
ECO/M3	ECO 5W MAINTAINED BULKHEAD

## CONSTRUCTION

- Injection moulded polycarbonate base
- Clear prismatic polycarbonate diffuser

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF-TEST EMERGENCY
/AT	ANTI-TAMPER FIXINGS
/SAL2	SELF ADHESIVE LEGEND KIT

Ordering Format: Product Code / Option

Example: ECO/M3/D3



# EL3



## APPLICATIONS

- Open areas
- Corridors


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- 160 Lumens
- Self-Test supplied as standard
- (LiFePO4) Lithium Iron Phosphate battery
- Recessed or Surface mounted
- Supplied with corridor & wide angle lens

## CONSTRUCTION

- Injection moulded fully integrated white body for Recess or surface mounting

## DIMENSIONS

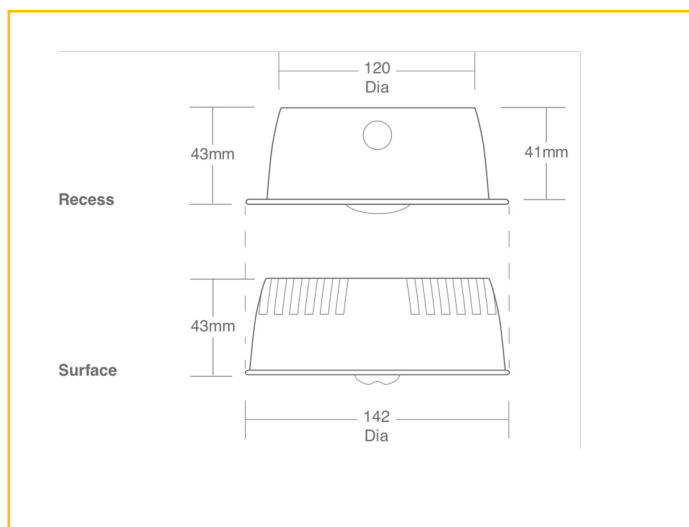

PRODUCT CODE	DESCRIPTION
EL3/NM3	EL 3W 160LM NON-MAINTAINED LED

OPTIONS	DESCRIPTION
/BK	BLACK FINISH

Ordering Format: Product Code / Option

Example: EL3/NM3/BK





# ELB



## APPLICATIONS

- Escape routes
- External doors


## TECHNICAL DETAILS

- CCT 5000K
- CRI >80
- 149 Lumens

## CONSTRUCTION

- Injection moulded polycarbonate base
- Clear prismatic polycarbonate diffuser

## DIMENSIONS

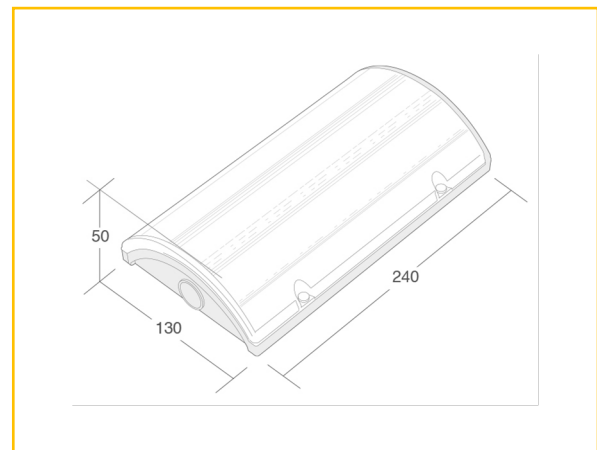

PRODUCT CODE	DESCRIPTION
ELB/M3	ELB 4W MAINTAINED BULKHEAD

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMG
/STE	SELF-TESTING EMERGENCY
/BLD	LEGEND BLADE

Ordering Format: Product Code / Option

Example: ELB/M3/D3

IP65



# Exodus



Anti-Vandal

Architectural & Feature

Downlighters

Emergency


Exterior

Recessed

Surface & Wall

Suspended

Track

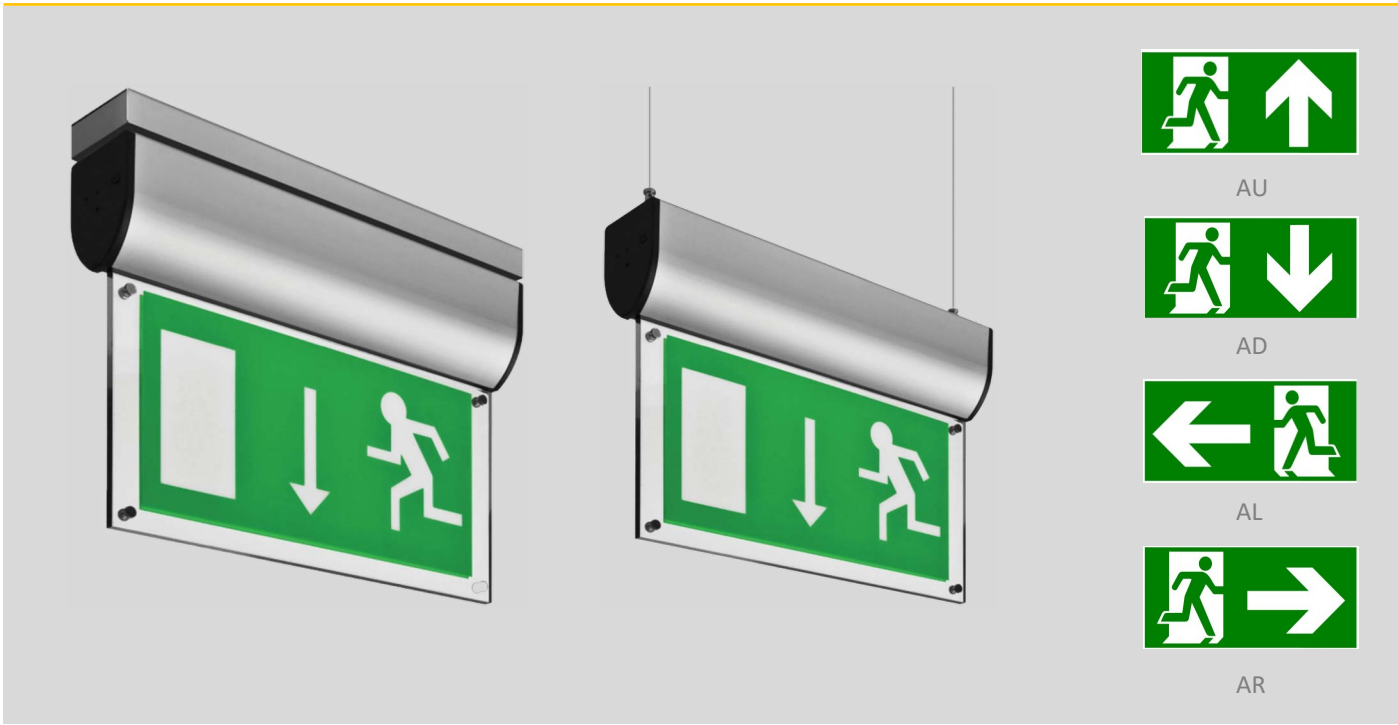

## APPLICATIONS

- Exit points


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Viewing distance 25mtrs

## CONSTRUCTION

- Aluminium extruded body, injection moulded End caps
- Wire suspension , Surface mounted , flag mounted
- 15 high intensity LED's for bright, illumination of legend

## DIMENSIONS

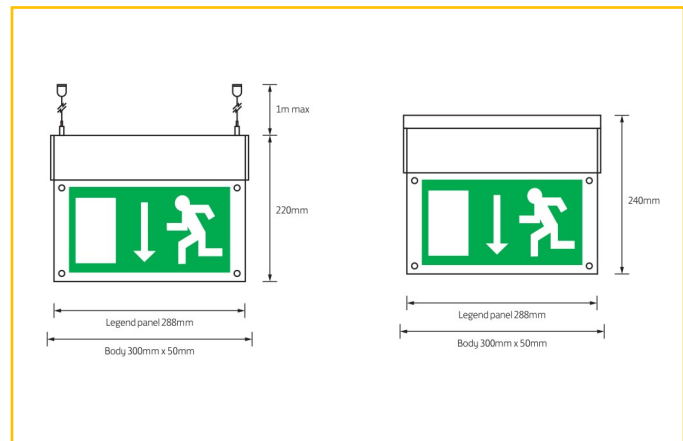

PRODUCT CODE	DESCRIPTION
ED/LED/M3/**/**	EXODUS 3W MAINTAINED LED EXIT SIGN

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/DSL	DOUBLE SIDED LEGEND
/STE	SELF-TESTING EMERGENCY
/SM	SURFACE MOUNTED
/WS	WIRE SUSPENDED
/FM	FLAG MOUNTED

Ordering Format: Product Code / Option

Example: ED/LED/M3/SM/AU

\*\* Suffix end of code with legend & mounting required\*\*



# Hermes



## APPLICATIONS

- Exit points


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Viewing distance 32mtrs

## CONSTRUCTION

- Fabricated sheet metal back box, front frame epoxy Powder coated white
- Flame retardant edge lit plasi-glas legend panel

## DIMENSIONS

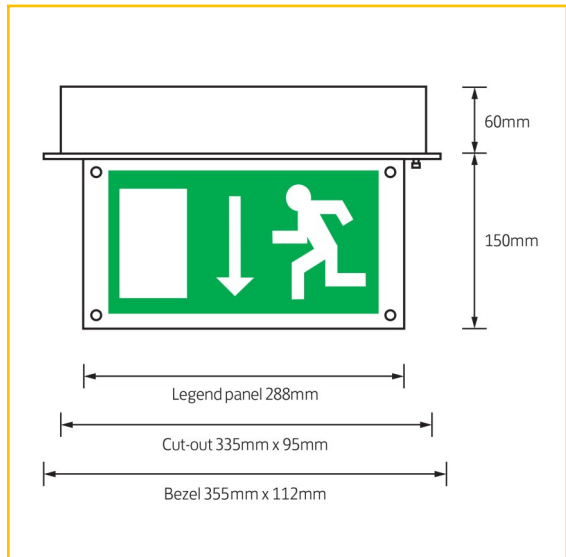

PRODUCT CODE	DESCRIPTION
HER/LED/M3/**	HERMES 2.5W MAINTAINED LED EXIT SIGN

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF-TEST EMERGENCY
/DS	DOUBLE SIDED LEGEND
/CPF	CUSTOM PAINT FINISHED CEILING PLATE

Ordering Format: Product Code / Option

Example: HER/LED/M3/D3/AU

\*\* Suffix end of code with legend required\*\*



# Infinity



## APPLICATIONS

- Exit points

## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Viewing distance 36mtrs

## CONSTRUCTION

- Fabricated sheet metal housing epoxy powder coated white
- Flame retardant polycarbonate legend panel

## DIMENSIONS



PRODUCT CODE	DESCRIPTION
INF/LED/M3/**	INFINITY 2.5W MAINTAINED LED EXIT SIGN

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/TS	PUSH TEST SWITCH
/PCV	PRODUCT COLOUR VARIATION


Ordering Format: Product Code / Option

Example: INF/LED/M3/D3/AU

\*\* Suffix end of code with legend required\*\*



# LRR 6

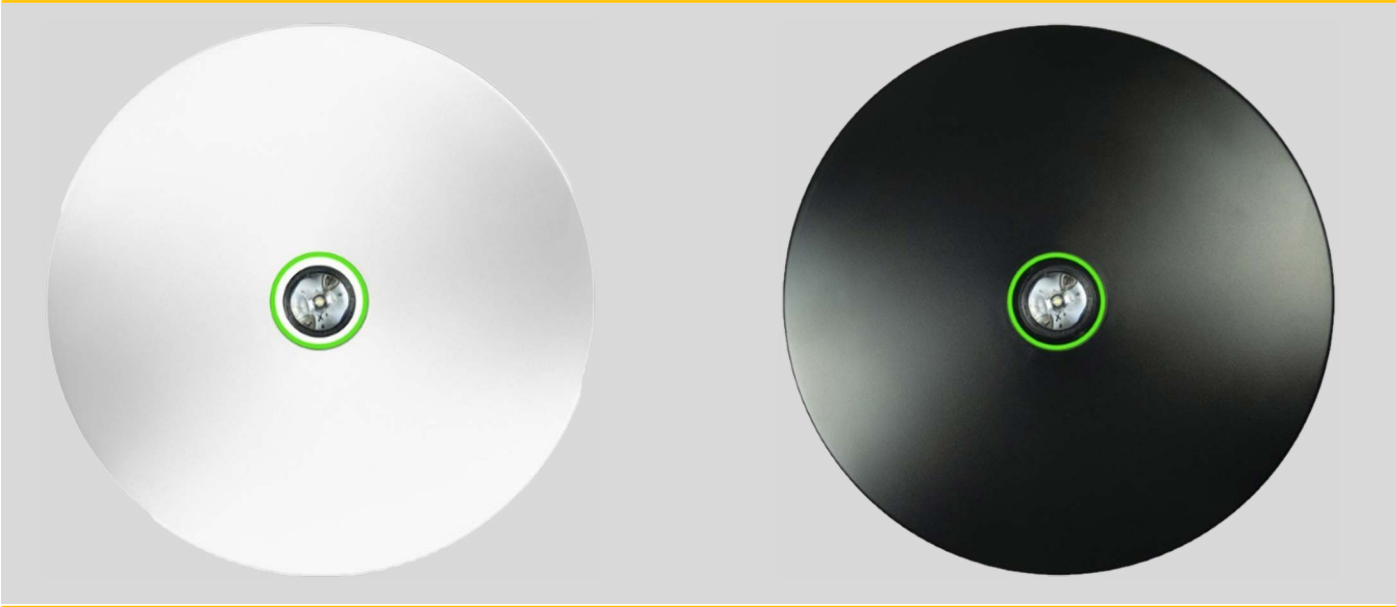

## APPLICATIONS

- Open areas
- Corridors

## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- 135° Open area or Corridor optic
- Lithium Battery technology

## CONSTRUCTION


- Injection moulded housing
- Besa fixing



IP20



## DIMENSIONS

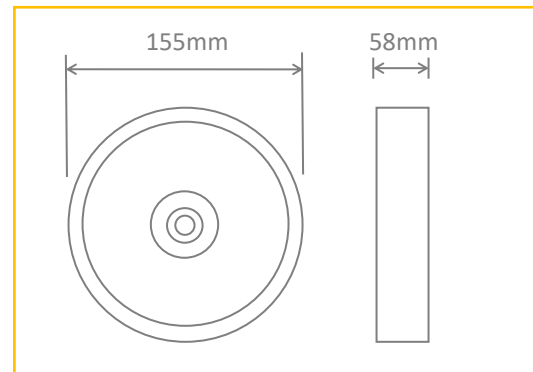

PRODUCT CODE	DESCRIPTION
LRR/3/OA	LRR 3W 224LM NM3 OPEN AREA LED
LRR/3/CR	LRR 3W 231LM NM3 CORRIDOR LED
LRR/3/NL	LRR 3W 200LM NM3 NON OPTIC LED

OPTIONS	DESCRIPTION
/OA	OPEN AREA OPTIC
/CR	CORRIDOR OPTIC
/NL	NON OPTIC
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/BK	BLACK FINISH

Ordering Format: Product Code / Option

Example: LRR/3/OA/D3/BK

# LRS 6



## APPLICATIONS

- Open areas
- Corridors


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- 135° Open area or Corridor optic
- Lithium Battery Technology

## CONSTRUCTION

- Injection moulded housing
- Besa mounting

## DIMENSIONS

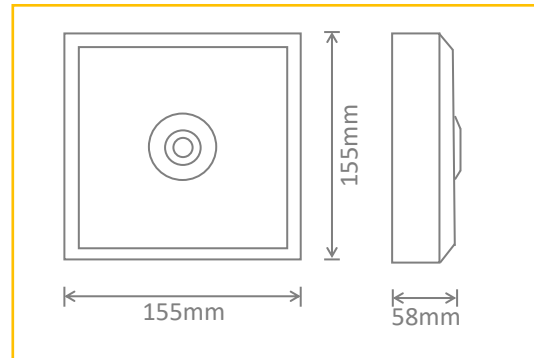

PRODUCT CODE	DESCRIPTION
LRS/3/OA	LRS 3W 224LM NM3 OPEN AREA LED
LRS/3/CR	LRS 3W 231LM NM3 CORRIDOR LED
LRS/3/NL	LRS 3W 200LM NM3 NON OPTIC LED

OPTIONS	DESCRIPTION
/OA	OPEN AREA OPTIC
/CR	CORRIDOR OPTIC
/NL	NON-OPTIC
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/BK	BLACK FINISH

Ordering Format: Product Code / Option  
Example: LRS/3/OA/D3







## APPLICATIONS

- Factories
- Sports Halls
- Schools


## TECHNICAL DETAILS

- CCT 5000K
- CRI >80
- 2 x 250lm LED
- IP65
- Lithium Iron Phosphate battery technology

## CONSTRUCTION

- Injection moulded polycarbonate housing
- prismatic polycarbonate heads
- Stainless steel bracketry

## DIMENSIONS

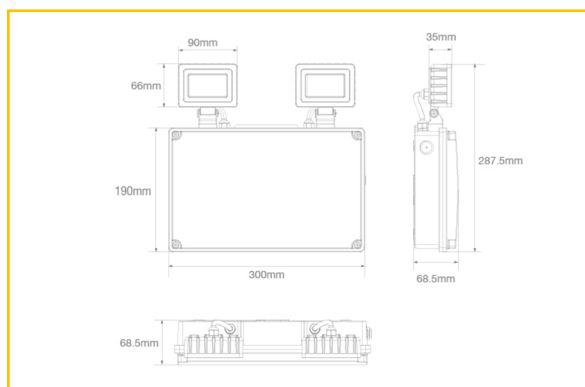

PRODUCT CODE	DESCRIPTION
ODI/NM3	ODI 2 x 250lm NM3 TWIN SPOT



# Spyro



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



## APPLICATIONS

- Exit points


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Viewing distance 25mtrs

## CONSTRUCTION

- Fabricated sheet metal back plate & frame epoxy Powder coated white
- Flame retardant edge lit plasi-glas legend panel

## DIMENSIONS

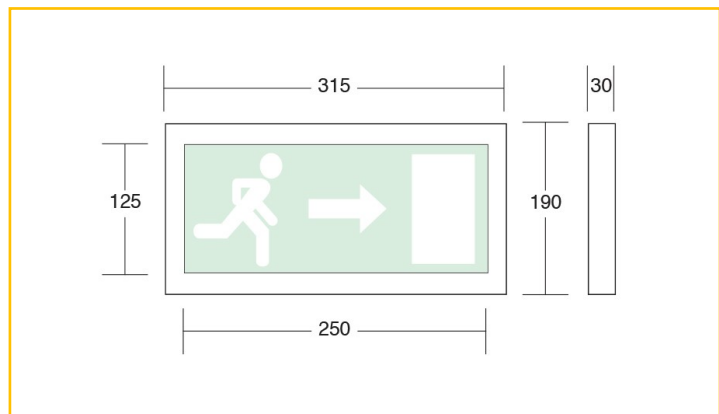


PRODUCT CODE	DESCRIPTION
SPY/LED/M3/**	SPYRO 4W MAINTAINED LED EXIT SIGN

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/BK	RAL9005 POWDER COATED BLACK
/SL	RAL9006 POWDER COATED SILVER-GREY

\*\* Suffix end of code with legend required\*\*



# Stelios

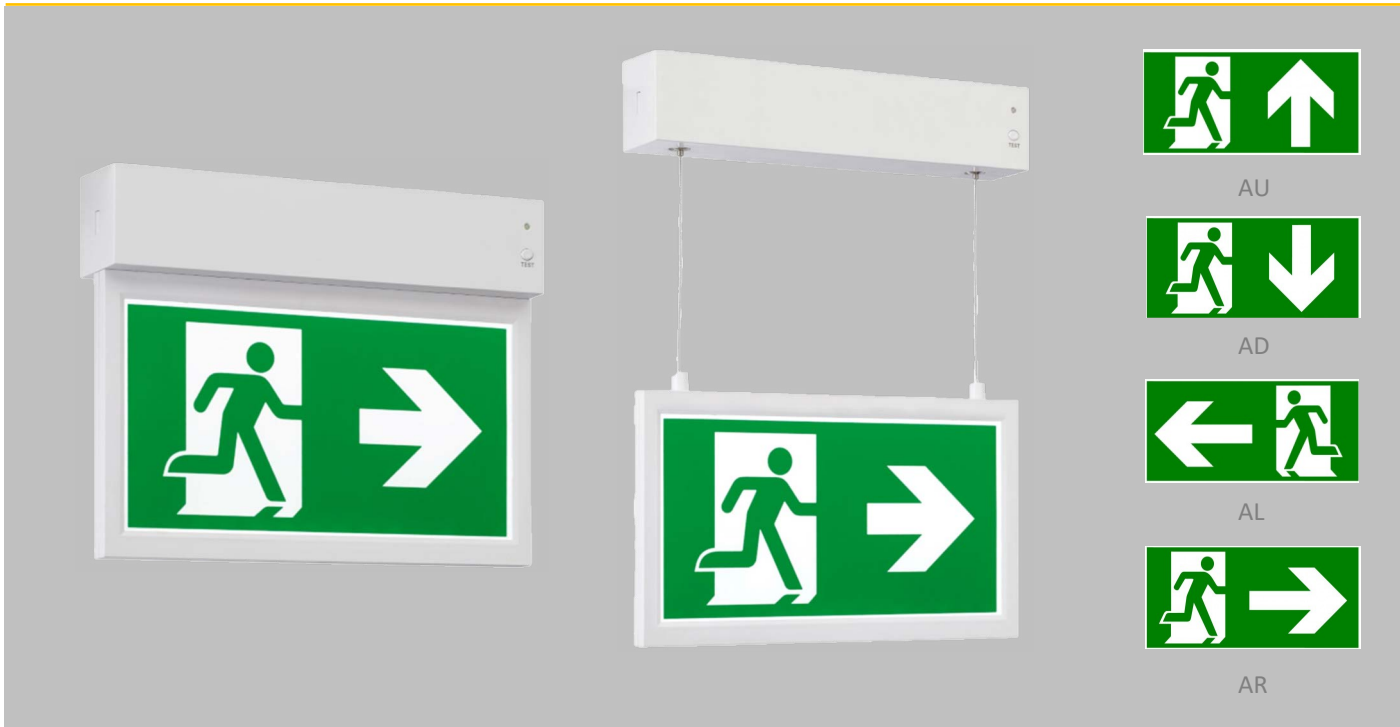


## APPLICATIONS

- Exit points

## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- Viewing distance 25mtrs

## DIMENSIONS

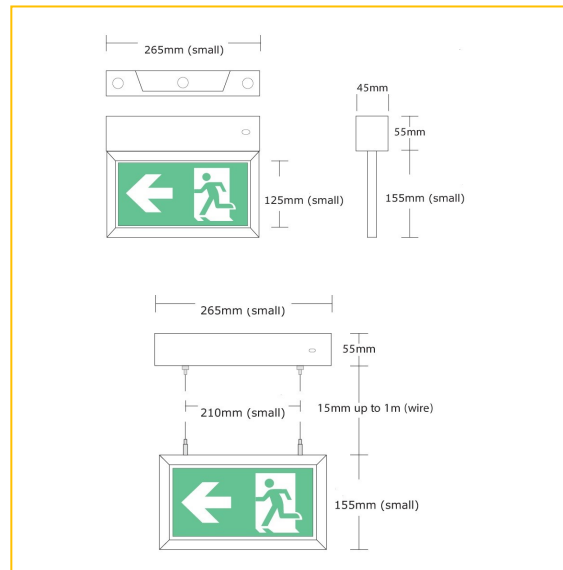

## CONSTRUCTION


- Injection moulded ceiling plate white, injection Moulded gear housing
- Wire suspension, Surface mounted
- Flame retardant edge lit plasi-glas legend panel

PRODUCT CODE	DESCRIPTION
STE/LED/M3/**	STELIOS 4W MAINTAINED LED EXIT SIGN

OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/DSL	DOUBLE SIDED LEGEND
/STE	SELF TESTING EMERGENCY
/SM	SURFACE MOUNTED
/WS	WIRE SUSPENDED



\*\* Suffix end of code with legend required\*\*

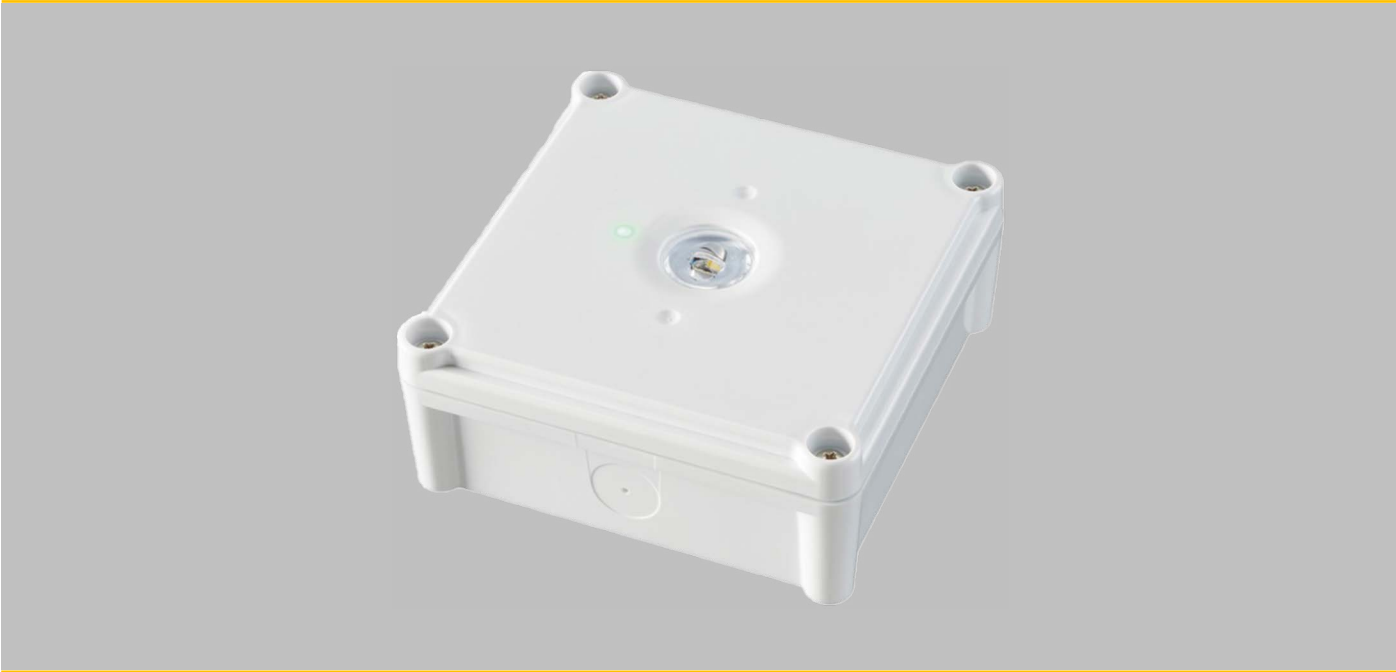

## APPLICATIONS

- Canopy
- Muster Point
- External exit points


## TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- 295 Lumens
- Self-Test supplied as standard
- (LiFePO4) Lithium Iron Phosphate battery
- Surface mounted
- Supplied with corridor, wide angle & high Level optic
- IP65

## CONSTRUCTION

- Injection moulded fully integrated white body for surface mounting

## DIMENSIONS

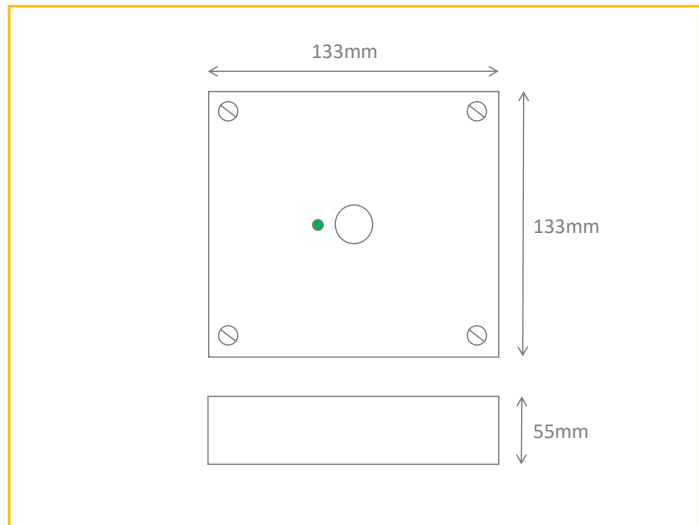

PRODUCT CODE	DESCRIPTION
UR/NM3/CR	URDA NM3 C/W CORRIDOR OPTIC
UR/NM3/WA	URDA NM3 C/W WIDE ANGLE OPTIC
UR/NM3/HL	URDA NM3 C/W HIGH LEVEL OPTIC

OPTIONS	DESCRIPTION
/BK	BLACK FINISH

Ordering Format: Product Code / Option

Example: UR/NM3/CR/BK



# Wall-E



## APPLICATIONS

- Church
- Theatre
- Offices
- Factory


## TECHNICAL DETAILS

- CCT 5000K
- Beam angle options
- CRI >80
- 2 x 2w LED 110 lumen per head

## CONSTRUCTION

- Injection moulded polycarbonate housing
- Clear prismatic polycarbonate heads
- Stainless steel fixings

## DIMENSIONS

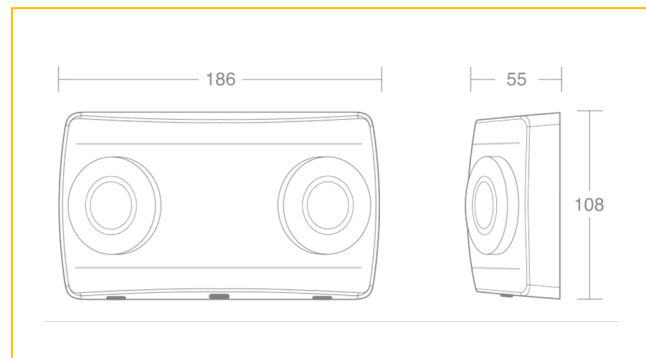

PRODUCT CODE	DESCRIPTION
WLE/M3/NB	WALL-E MAINTAINED NARROW BEAM
WLE/M3/WB	WALL-E MAINTAINED WIDE BEAM



# XLP-3



## APPLICATIONS

- Retail
- Atrium
- Display
- Reception


## CONSTRUCTION

- Injection moulded body
- Body colour options
- supplied with lock bracket

## TECHNICAL DETAILS

- CCT 5000K
- Suitable for - Eutrac, Global & Stucci Systems
- CRI >80
- 1 x 2w LED 209 lumens
- Lithium battery technology LiFePO4

## DIMENSIONS

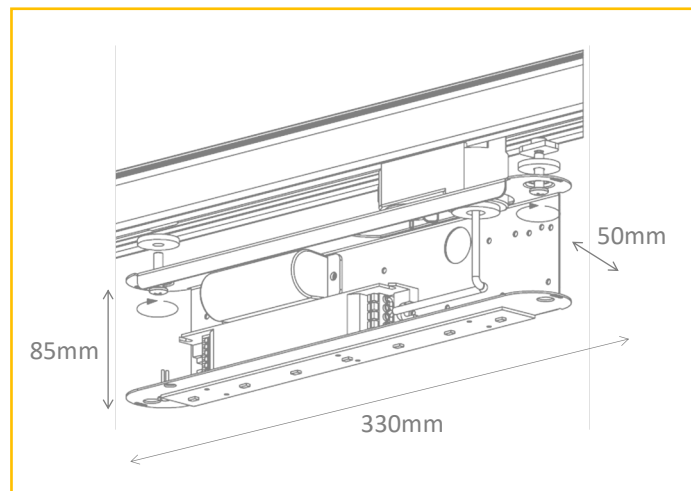

PRODUCT CODE	DESCRIPTION
XLP/NM3/WH/**	XLP NON-MAINTAINED FINISHED WHITE


OPTIONS	DESCRIPTION
/WH	WHITE BODY RAL9016
/BK	BLACK BODY RAL9005
/EU	EUTRAC ADAPTOR
/GL	GLOBAL ADAPTOR
/STC	STUCCI ADAPTOR
/DALI	3HR DALI MONITORED EMERGENCY



Ordering Format: Product Code / Option  
Example: XLP/NM3/WH//DALI



# Exterior

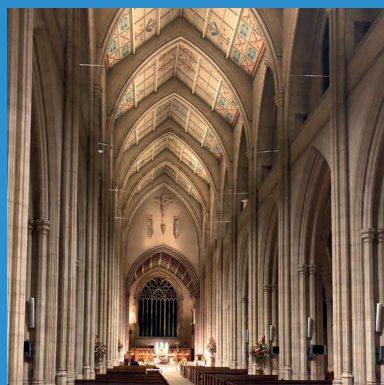

Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Adur



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



## CONSTRUCTION

- Die-cast aluminium body
- Tempered glass diffuser
- One piece flow gasket


## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 3000 or 4000K
- IK08

## APPLICATIONS

- Building perimeters
- Public Places
- Car Parks
- Façade illumination

## DIMENSIONS

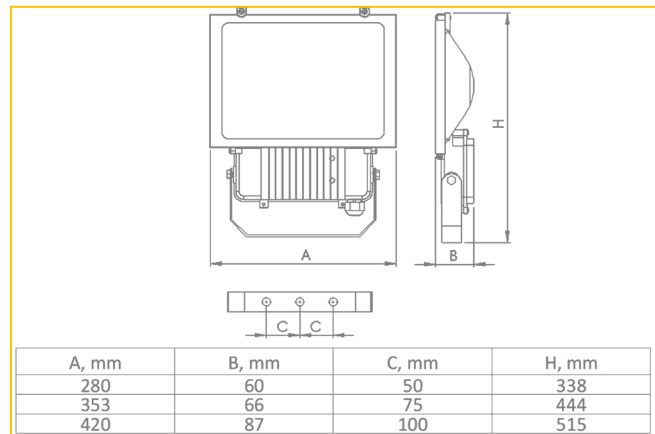

PRODUCT CODE	DESCRIPTION
ADR/34/4K/L60	ADUR, 34W, 4,170LM 60 DEGREE OPTIC FINISHED RAL7043
ADR/52/4K/L60	ADUR, 52W, 5,828LM 60 DEGREE OPTIC, FINISHED RAL7043
ADR/68/4K/L60	ADUR, 68W, 8,412LM 60 DEGREE OPTIC, FINISHED RAL7043
ADR/105/4K/L60	ADUR, 105W, 11,656LM 60 DEGREE OPTIC, FINISHED RAL7043
ADR/132/4K/L60	ADUR, 132W, 14,570LM 60 DEGREE OPTIC, FINISHED RAL7043
ADR/158/4K/L60	ADUR, 158W, 17,484LM 60 DEGREE OPTIC, FINISHED RAL7043
ADR/211/4K/L60	ADUR, 211W, 23,312LM 60 DEGREE OPTIC, FINISHED RAL7043

\*\*Suffix 4K to 3K for 3000 Kelvin -

Suffix L60 to required optic\*\*


OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING
/ADIM	AUTONOMOUS 2 STAGE DIMMING
/ILC	INLINE IP68 PLUG & SOCKET
/PC	PHOTO-CELL

Ordering Format: Product Code / Option


Example: ADR/34/4K/L60/DALI




## OPTICS




LS12




LS30




LS90




LS45




LS60



LSM1



LSA2



LSA1

# Ansty



Ansty 'H'

Ansty 'G'

Ansty 'O'

## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks


## CONSTRUCTION

- Die-cast aluminium two piece body
- Lumalens diffuser
- One piece flow gasket

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 5000K

## DIMENSIONS

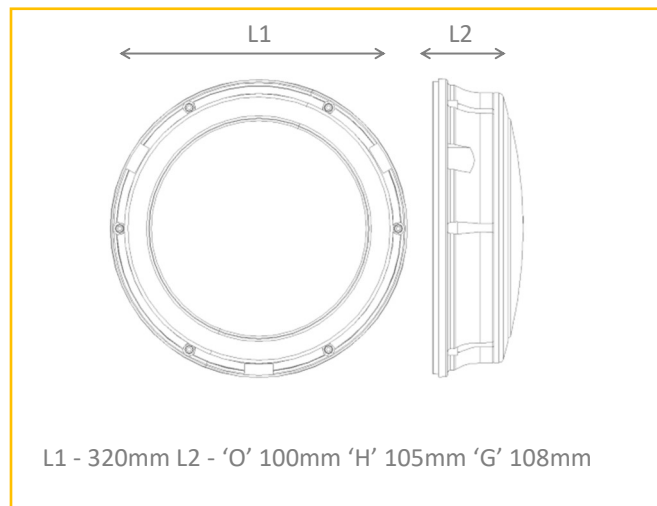

ORDER CODE	DESCRIPTION
AN/O/17/CW/BK	ANSTY OPEN FACE 1467LM BLACK BODY
AN/H/17/CW/BK	ANSTY HOODED FACE 1467LM BLACK BODY
AN/G/17/CW/BK	ANSTY GRILL FACE 1467LM BLACK BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMERGENCY
/DALI	TOUCH/DALI DIMMABLE
/MW1	MICROWAVE SENSOR
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option  
Example: AN/O/17/CW/BK/M3





## APPLICATIONS

- Building perimeters
- Public Places
- Car Parks
- Façade illumination

## CONSTRUCTION


- Die-cast aluminium body
- Opal polycarbonate diffuser
- One piece flow gasket

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 3000 or 4000K
- IK08



## DIMENSIONS

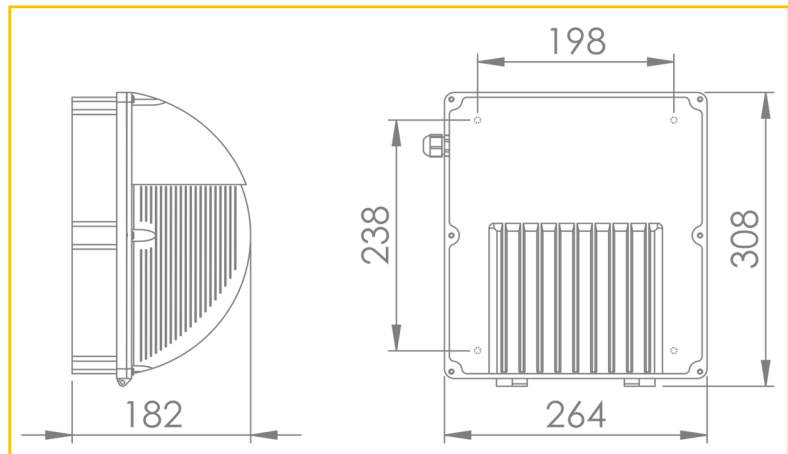

ORDER CODE	DESCRIPTION
ARL/27/4K/OP/BK	ARLOWE, 27W, 4K, 2,720LM, FINISHED BLACK
ARL/40/4K/OP/BK	ARLOWE, 40W,4K, 3,964LM, FINISHED BLACK

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/DALI	DALI ADDRESSABLE DIMMING
/MW1	MICROWAVE SENSOR
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option

Example: ARL/27/4K/OP/BK/M3

# Brutus



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



Brutus Wall


## APPLICATIONS

- Prison cell
- Harsh Environment
- Car Parks
- High risk area

## TECHNICAL DETAILS

- IK10 Impact rating
- CRI>80
- CCT 4000K

## DIMENSIONS

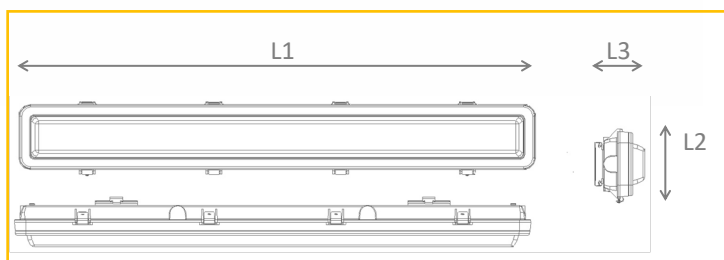

## CONSTRUCTION

- Die-cast aluminium two piece body
- Lumalens anti-vandal polycarbonate diffuser
- One piece flow gasket

## BRUTUS WALL

22w L1 - 309mm L2 178mm L3 - 102mm

37w L1 - 309mm L2 178mm L3 - 102mm

47w L1 - 614mm L2 - 178mm L3 - 102mm

66w L1 - 614mm L2 - 178mm L3 - 102mm

112w L1 - 1247mm L2 - 178mm L3 102mm

136w L1 - 1247mm - L2 - 178mm L3 102mm

ORDER CODE	DESCRIPTION
BRW/22/4K/EY	BRUTUS WALL 22W 2274LM GREY BODY
BRW/37/4K/EY	BRUTUS WALL 37W 4223LM GREY BODY
BRU/47/4K/SG	BRUTUS 47W 5695LM GREY BODY
BRU/66/4K/SG	BRUTUS 66W 8021LM GREY BODY
BRU/112/4K/SG	BRUTUS 112W 13172LM GREY BODY
BRU/136/4K/SG	BRUTUS 136W 15930LM GREY BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMERGENCY
/DALI	DALI DIMMING


Ordering Format: Product Code / Option

Example: BRW/22/4K/EY/M3

IP66



# Buckingham

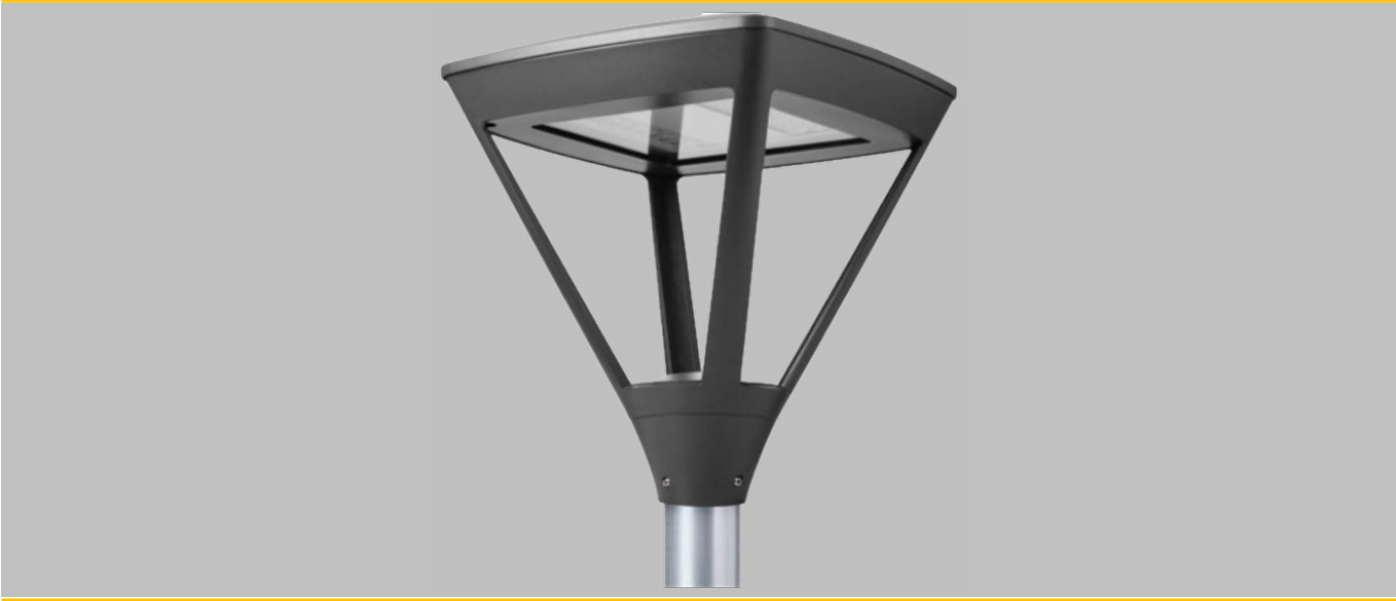

## APPLICATIONS

- Pathway
- Roads
- Car Parks

## CONSTRUCTION


- Die-cast aluminium housing
- Epoxy powder coated RAL7021
- Tempered glass cover impact resistant
- IK08
- 60mm mounting with 4 x grub screws

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 3000, 4000K
- 3 types of Optic
- Life 100,000 L90/B10



## DIMENSIONS

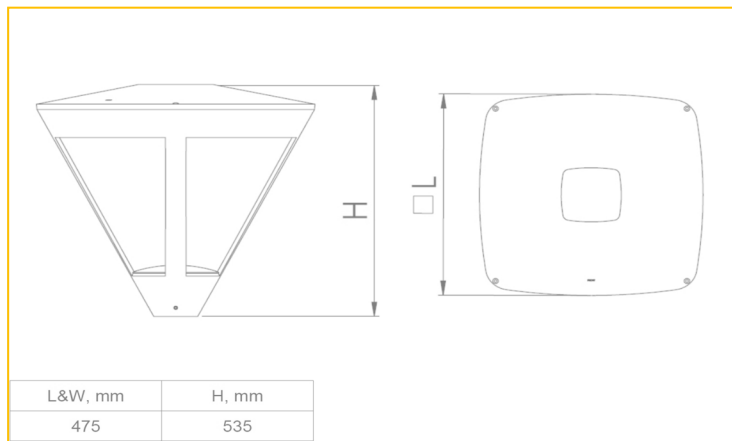


ORDER CODE	DESCRIPTION
BKH/43/4K/BG/L***	BUCKINGHAM 43W, 4K, 4,830LM
BKH/43/4K/BG/L***	BUCKINGHAM, 51W, 4K 5,623LM
BKH/68/4K/BG/L***	BUCKINGHAM, 68W, 4K, 7,498LM
BKH/87/4K/BG/L***	BUCKINGHAM, 87W, 4K, 9,222LM


Ordering Format: Product Code / Option

Example: BKH/43/4K/BG/LSM1


## OPTICS



LSM 1



LSS 1



LS140



# Cyclone




## APPLICATIONS

- Pathway
- Roads
- Car Parks

## CONSTRUCTION

- Die-cast aluminium body
- Epoxy powder coated RAL7035
- Tempered glass cover
- Adjustable head  $-15^{\circ}/ +15^{\circ}$
- IK09

## DIMENSIONS


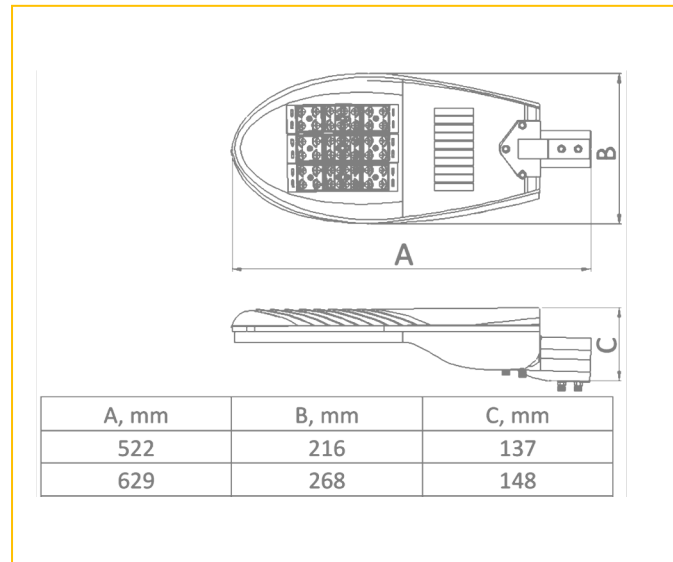


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 3000, 4000K
- 6 types of Optic
- Life 100,000 L90/B10





ORDER CODE	DESCRIPTION
CYC/26/4K/SG/L***	CYCLONE 26W, 4K, 3018LM, RAL 7035
CYC/43/4K/SG/L***	CYCLONE 43W, 4K, 5337LM, RAL 7035
CYC/77/4K/SG/L***	CYCLONE 77W, 4K, 9054LM, RAL 7035
CYC/102/4K/SG/L***	CYCLONE 100W, 4K, 12072LM, RAL7035

## OPTICS



LSM 1

LSM 2



LSPL 1

LSPR 1

LSS 1

LSS 2



# Eclipse



## APPLICATIONS

- Pathways
- Pedestrian areas
- Car parks


## CONSTRUCTION

- Extruded aluminium body
- Polycarbonate clear diffuser
- Powder coated Chromate conversion coating
- J-Bolt mounted

## TECHNICAL DETAILS

- Full cut-off
- Option of ground fixings
- CRI>80
- CCT 5000K

## DIMENSIONS

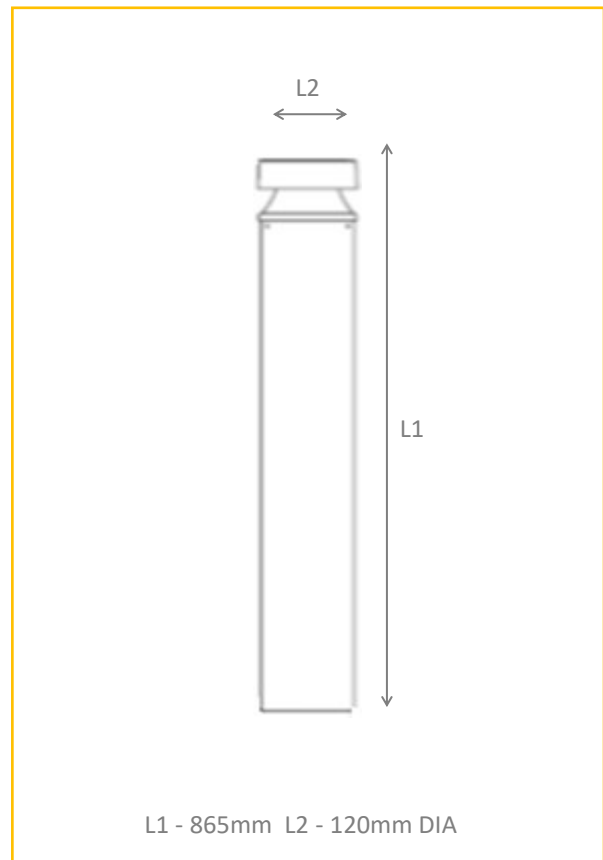

ORDER CODE	DESCRIPTION
ECP/18/CW/BK	ECLIPSE 18W 960LM FULL CUT OFF BOLLARD

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/RM7000/E	ROOT MOUNTING KIT
/180	BACKLITE SHEILD

Ordering Format: Product Code / Option  
 Example: ECP/18/CW/BK/M3





### APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks


### CONSTRUCTION

- Die-cast aluminium body with integral heatsink
- Polycarbonate diffuser
- Chromate conversion powder coated

### TECHNICAL DETAILS

- Switchable integral photo-cell
- Type IV Optic
- CRI>80
- CCT 5000K

### DIMENSIONS

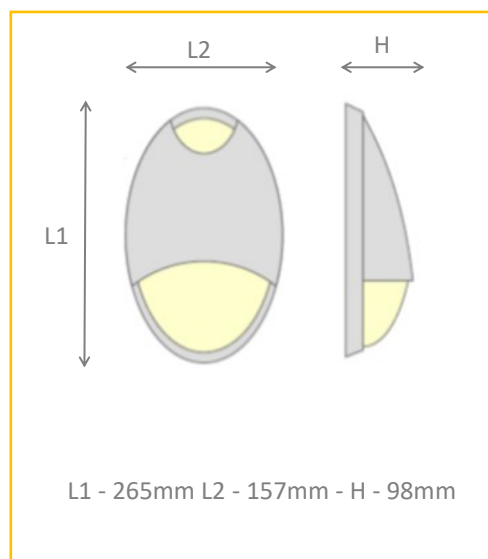

ORDER CODE	DESCRIPTION
ET/10/5K/CL/BK	ETON 10W HOOD 1192LM BLACK BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/PCV	PRODUCT COLOUR VARIATION

Ordering Format: Product Code / Option

Example: ET/10/5K/CL/BK/M3



# FusiLED



FusiLED 'H'

FusiLED 'G'

FusiLED 'O'

## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks


## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 4000K

## CONSTRUCTION

- Die-cast aluminium two piece body
- Satin frost diffuser
- One piece flow gasket

## DIMENSIONS

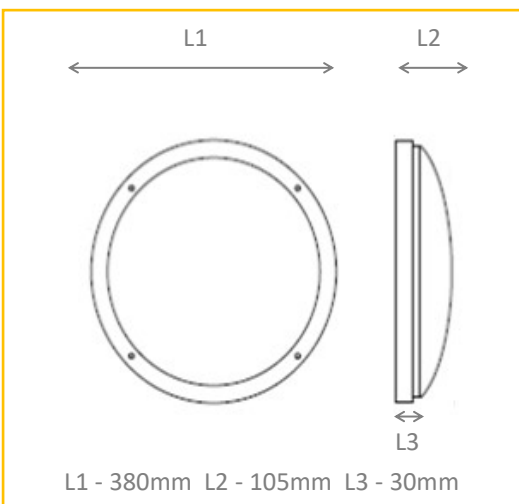

ORDER CODE	DESCRIPTION
FLH/19/4K/BK	FUSILED HOODED FACE 1400LM BLACK BODY
FLG/22/4K/BK	FUSILED GRILL FACE 1750LM BLACK BODY
FLO/22/4K/BK	FUSILED OPEN FACE 1750LM BLACK BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMERGENCY
/DALI	DALI ADDRESSABLE DIMMING
/MW1	MICROWAVE SENSOR
/BTC	CASAMBI WIRELESS CONTROL



Ordering Format: Product Code / Option

Example: FLH/19/4K/BK/M3

# Gemini



## APPLICATIONS

- Pathway
- Roads
- Car Parks


## CONSTRUCTION

- Die-cast aluminium body
- Epoxy powder coated RAL7035
- Tempered glass cover
- Adjustable head  $-15^{\circ}$  /  $+15^{\circ}$
- IK09

## TECHNICAL DETAILS

- Various Wattages
- CRI > 80
- CCT 3000, 4000K
- 6 types of Optic
- Life 100,000 L90/B10


## DIMENSIONS

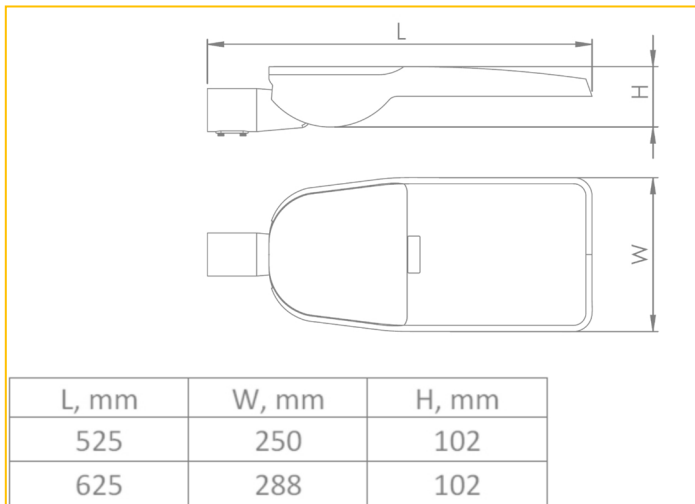


ORDER CODE	DESCRIPTION
GEM/26/4K/SG/L***	GEMINI 26W, 4K, 3,434LM, 525MM
GEM/40/4K/SG/L***	GEMINI 40W, 4K, 4,878LM, 525MM
GEM/52/4K/SG/L***	GEMINI 52W, 4K, 6,869LM, 525MM
GEM/70/4K/SG/L***	GEMINI 70W, 4K, 9,158LM, 625MM
GEM/80/4K/SG/L***	GEMINI 80W, 4K, 10,303LM, 625MM

\* Suffix 4K to 3K for 3000 Kelvin LED - Suffix end of code with required Optic\*


## OPTICS




LSM 1




LSM 2




LSPL 1



LSPR 1



LSS 1



LSS 2



# High Beam



Anti-Vandal

Architectural & Feature

Downlighters

Emergency

Exterior

Recessed

Surface & Wall

Suspended

Track



## APPLICATIONS

- Building perimeters
- Athletics Track
- Sports Pitches
- Shipping Docks



## CONSTRUCTION

- Die-cast aluminium body
- Tempered glass diffuser
- One piece flow gasket

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 4000K
- IK08
- Life 135,000hrs - L80/B50


## DIMENSIONS

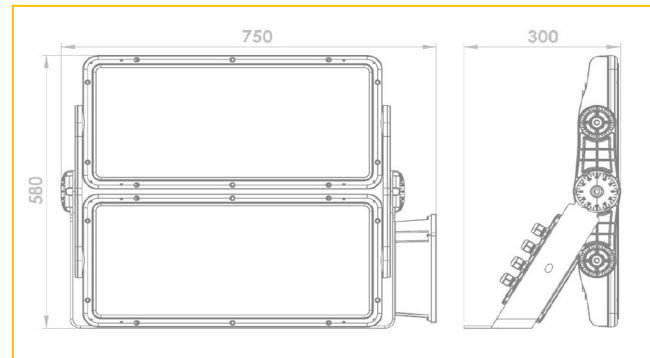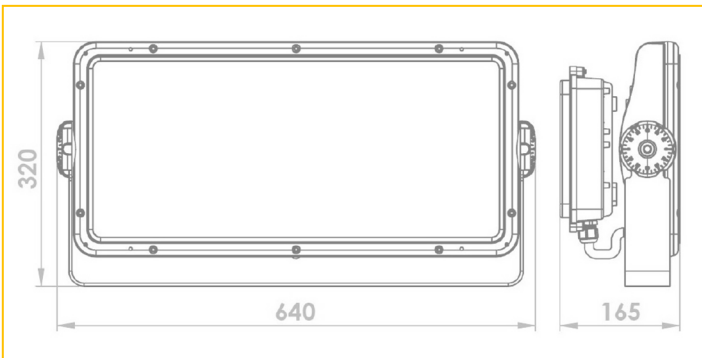

PRODUCT CODE	DESCRIPTION
HBF/325/4K/L60	HIGH BEAM, 325W, 49,422LM, 60 DEGREE OPTIC, 4000K
HBF/404/4K/L60	HIGH BEAM, 404W, 59,557LM, 60 DEGREE OPTIC, 4000K
HBF/475/4K/L60	HIGH BEAM, 475W, 67,829LM, 60 DEGREE OPTIC, 4000K
HBF/650/4K/L60	HIGH BEAM, 650W, 98,844LM, 60 DEGREE OPTIC, 4000K
HBF/806/4K/L60	HIGH BEAM, 806W, 119,114LM, 60 DEGREE OPTIC, 4000K
HBF/950/4K/L60	HIGH BEAM, 950W, 135,567LM, 60 DEGREE OPTIC, 4000K


\*\* Suffix L60 to beam angle required\*\*

## OPTICS

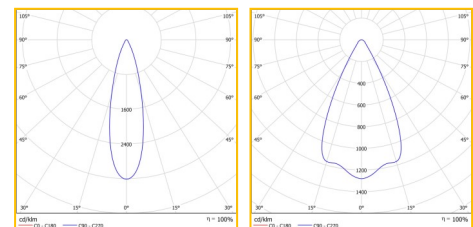

LS30

LS45

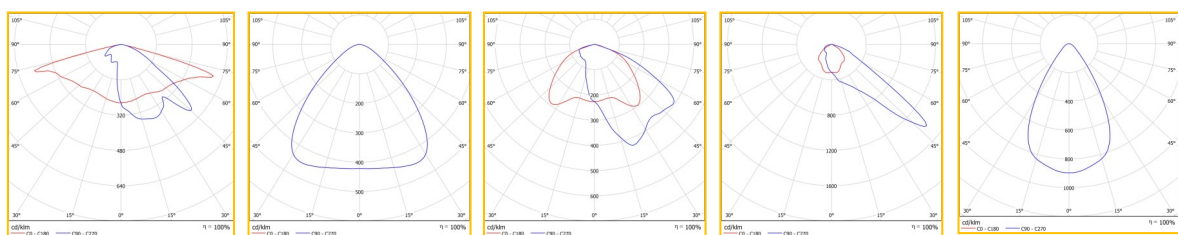

LSM1

LS90

LSA1

LSA2

LS60

IP66





# Lerwick



## APPLICATIONS

- Pathways
- Pedestrian areas
- Car parks


## TECHNICAL DETAILS

- Option of ground fixings
- CRI>80
- CCT 5000K

## CONSTRUCTION

- Extruded aluminium body
- Polycarbonate vandal resistant diffuser
- Powder coated Chromate conversion coating

## DIMENSIONS

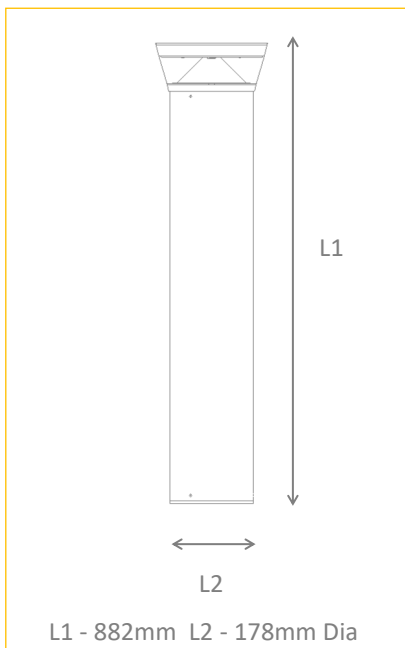

ORDER CODE	DESCRIPTION
LW/20/5K/BK	LERWICK 20W 2282LM BLACK BODY JBOLTS

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/RM7000	ROOT MOUNTING KIT
/BREE	SURFACE MOUNTING BEZEL

Ordering Format: Product Code / Option

Example: LW/20/5K/BK/M3



# Luna



## APPLICATIONS

- Toilets
- Corridors
- Store rooms
- Perimeter walls
- Walkways


## CONSTRUCTION

- Die-cast base epoxy powder coated
- Opal lumalens polycarbonate diffuser
- Screw fixed diffuser

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- 17w Samsung LED's

## DIMENSIONS

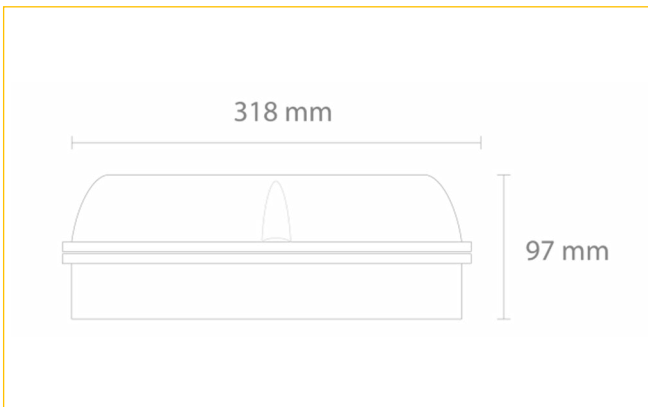

PRODUCT CODE	DESCRIPTION
LN/17/4K/BK	LUNA 17W, 4K, 2,408LM, BLACK BASE
LN/17/4K/H/BK	LUNA 17W, 4K, 2007LM, BLACK HOOD

OPTIONS	DESCRIPTION
/DALI	TOUCH/DALI DIMMABLE
/M3	3HR EMERGENCY
/MW1	MICROWAVE SENSOR
/WH	WHITE POWDER COATED BASE


Ordering Format: Product Code / Option

Example: LN/17/4K/BK/DALI

\*\* Suffix BK with WH for white base \*\*



# Mako

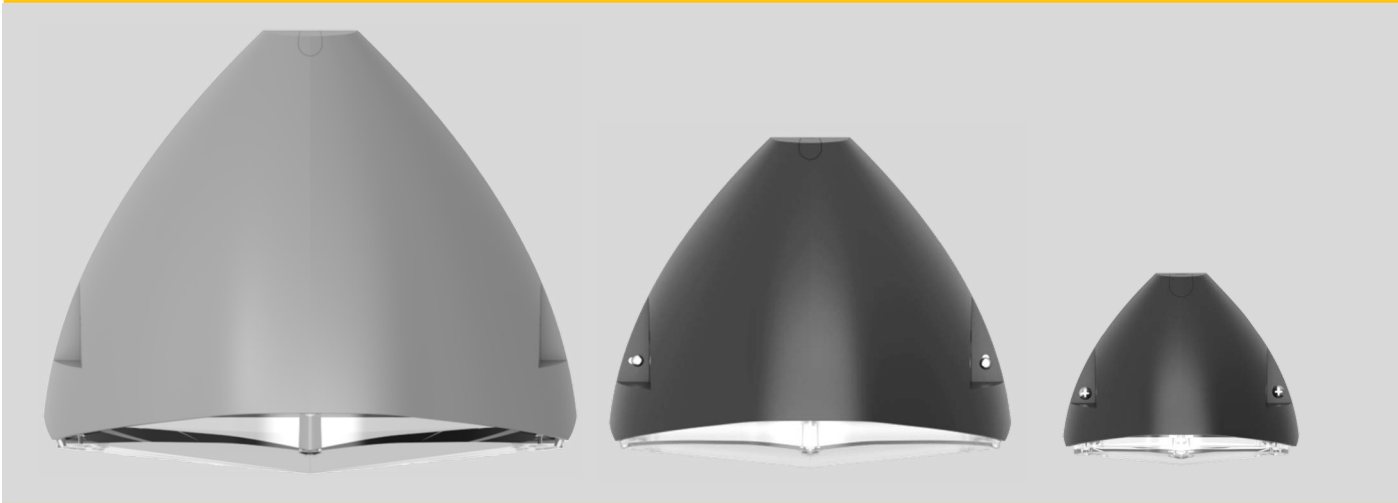

## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks
- Schools

## CONSTRUCTION


- Die-cast aluminium body
- Exterior powder coated
- Durable polycarbonate diffuser
- One piece flow gasket

## TECHNICAL DETAILS


- Tamperproof fixings
- CRI>80
- Switchable CCT 3000, 4000K
- IK10 impact resistance

## DIMENSIONS


### MAKO

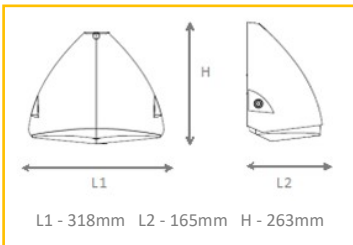

### MAKO MIDI

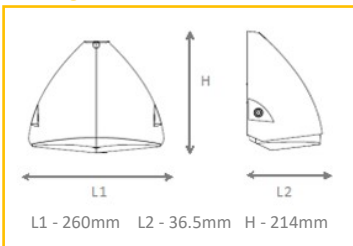

### MAKO NANO

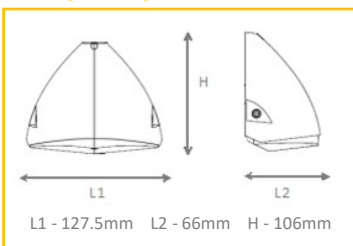

ORDER CODE	DESCRIPTION
MA/13/CCT/BK	MAKO 13W 1700LM BROAD DISTRIBUTION
MA/18/CCT/BK	MAKO 18W 2500LM BROAD DISTRIBUTION
MA/25/CCT/BK	MAKO 25W 3500LM BROAD DISTRIBUTION
MA/7/CCT/BK	MAKO MIDI 7W 950LM BROAD DISTRIBUTION
MA/8/CCT/BK	MAKO MIDI 8W 1150LM BROAD DISTRIBUTION
MA10/CCT/BK	MAKO MIDI 10W 1400LM BROAD DISTRIBUTION
MA12/CCT/BK	MAKO MIDI 12W 1550LM BROAD DISTRIBUTION
MA/5/CCT/BK	MAKO NANO 5W 585LM BROAD DISTRIBUTION

OPTIONS	DESCRIPTION
/M3	3hr emergency
/D3	DALI monitored emergency
/PC	Photo-cell
/MW1	Microwave sensor
/PMB	Post mounting bracket
/9005	Black finished body
/7016	Anthracite finished body

Ordering Format: Product Code / Option

Example: MA/13/CCT/BK/M3

\*\* /M3 Emergency is unavailable in the NANO\*\*

IP65



# Melton



## APPLICATIONS

- Pathways
- Pedestrian areas
- Car parks

## CONSTRUCTION

- Extruded Stainless Steel body
- Polycarbonate clear diffuser
- Clear lacquer coating

## TECHNICAL DETAILS


- Option of ground fixings
- CRI>80
- CCT 5000K

ORDER CODE	DESCRIPTION
ML/14/CW/BK	MELTON 14W 1382LM BLACK BODY JBOLTS

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/RM7000	ROOT MOUNTING KIT

Ordering Format: Product Code / Option  
Example: ML/14/CW/BK/M3

## DIMENSIONS

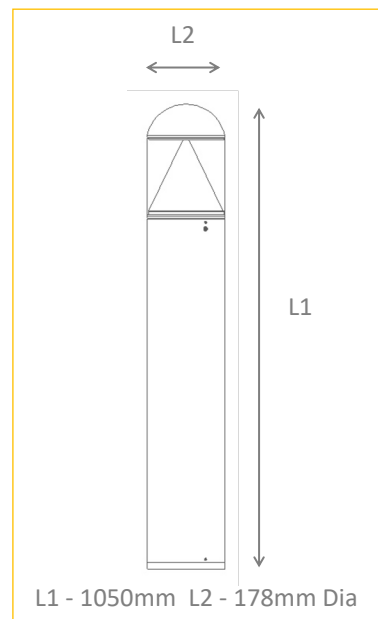



PR (F)

PR (D)

PR (S)

### APPLICATIONS

- Pathways
- Pedestrian areas
- Car parks

### CONSTRUCTION

- Extruded aluminium body
- Polycarbonate clear diffuser
- Powder coated Chromate conversion coating

### TECHNICAL DETAILS


- Option of ground fixings
- CRI>80
- CCT 5000K

ORDER CODE	DESCRIPTION
PR/F/15/CW/BK	PRESTON 15W 1566LM FLAT TOP & JBOLTS
PR/D/15/CW/BK	PRESTON 15W 1566LM DOME TOP & JBOLTS
PR/S/15/CW/BK	PRESTON 15W 1566LM SQUARE & JBOLTS

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/RM7000	ROOT MOUNTING KIT

Ordering Format: Product Code / Option  
 Example: PR/F/15/CW/BK/M3

### DIMENSIONS

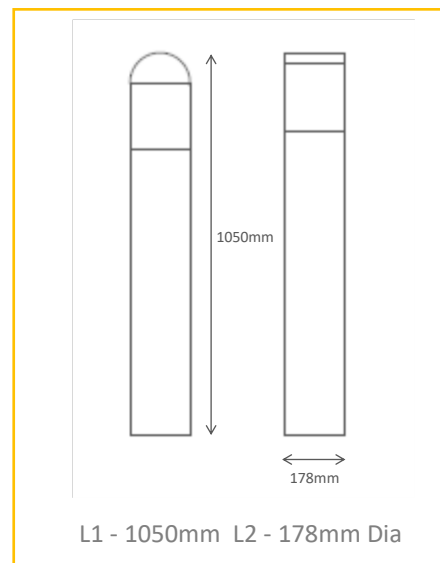

# Sports Power



## APPLICATIONS

- Football Pitches
- Hockey Pitches
- Coastal docks
- Loading yards


## CONSTRUCTION

- Die-cast aluminium body & frame
- Laser guide aiming tool
- Injection moulded optics
- Powder coated Chromate conversion coating

## TECHNICAL DETAILS

- Option of Optics
- CRI>80
- CCT 5000K

## DIMENSIONS

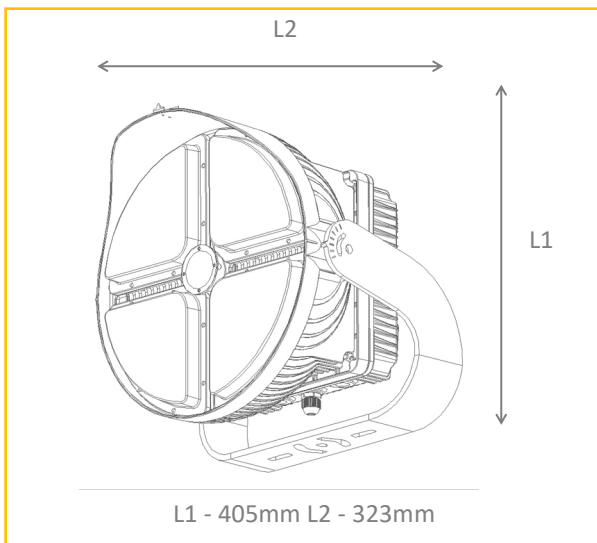

ORDER CODE	DESCRIPTION
SPF/300/5K/SG/**	SPORTS POWER 300W 32000LM GREY BODY
SPF/600/5K/SG/**	SPORTS POWER 600W 65000LM GREY BODY

OPIONS	DESCRIPTION
/22	2 X 2 OPTIC = BEAM CANDLE POWER CENTRE 609,263 CD
/33	3 X 3 OPTIC = BEAM CANDLE POWER CENTRE 463,808 CD
/44	4 X 4 OPTIC = BEAM CANDLE POWER CENTRE 167,213 CD
/55	5 X 5 OPTIC = BEAM CANDLE POWER CENTRE 117,631 CD

\*\* Please suffix end of code with required optics\*\*

Ordering Format: Product Code / Option

Example: SPF/300/5K/SG/22

IP67





## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks


## CONSTRUCTION

- Die-cast aluminium two piece body
- Lumalens diffuser
- One piece flow gasket

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 4000K

## DIMENSIONS

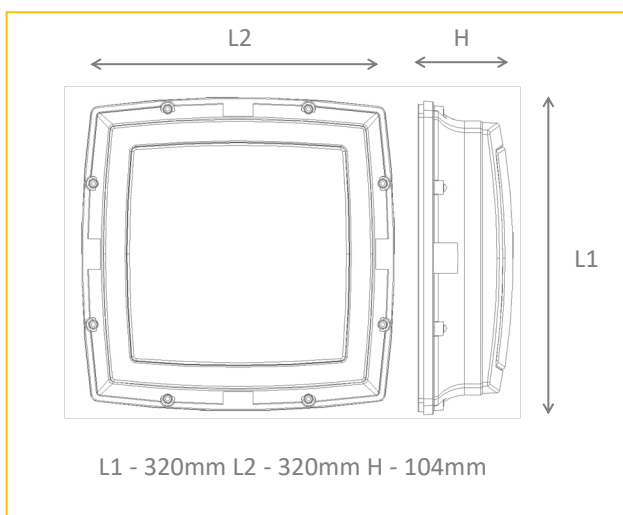

ORDER CODE	DESCRIPTION
SQL/O/17/CW/BK	SQL OPEN FACE 1614LM BLACK BODY
SQL/H/17/CW/BK	SQL HOODED FACE 1614LM BLACK BODY
SQL/G/17/CW/BK	SQL GRILL FACE 1614LM BLACK BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMERGENCY
/DALI	TOUCH/DALI DIMMING
/MW1	MICROWAVE SENSOR
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option

Example: SQL/O/17/CW/BK/M3

IP66





# Stour



## APPLICATIONS

- Pathway
- Roads
- Car Parks


## CONSTRUCTION

- Die-cast aluminium housing
- Epoxy powder coated RAL7043
- Impact resistant polycarbonate diffuser
- IK08
- 60mm mounting with 4 x grub screws

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 3000, 4000K
- Standard Optic
- Life 50,000 L90/B50

## DIMENSIONS

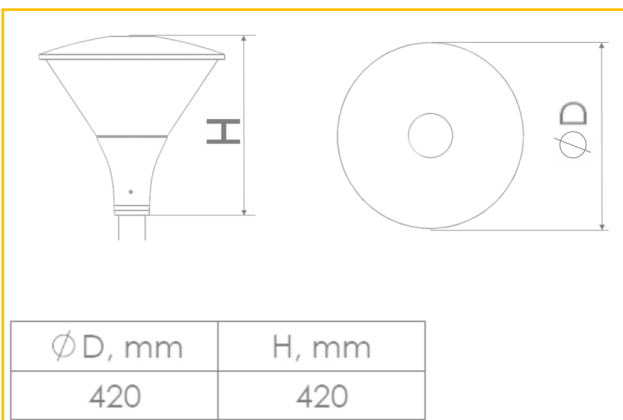

ORDER CODE	DESCRIPTION
STR/18/4K/SO/7043	STOUR, 18W, 4K, 2,655LM, STD OPTIC
STR/25/4K/SO/7043	STOUR, 25W, 4K, 3,617LM, STD OPTIC
STR/32/4K/SO/7043	STOUR, 32W, 4K, 4,521LM, STD OPTIC
STR/39/4K/SO/7043	STOUR, 39W, 4K, 5,195LM, STD OPTIC



# Urban



## APPLICATIONS

- Harsh Environments
- Building perimeters
- Underpasses

## CONSTRUCTION

- Die-cast aluminium body
- Polycarbonate moulded diffuser
- Chromate conversion powder coated


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 4000K
- Type 3 Optic
- 1-10v Driver

## DIMENSIONS

ORDER CODE	DESCRIPTION
UB/25/5K/BK	URBAN 25W 3424LM 5000K BLACK BODY
UB/37/5K/BK	URBAN 37W 4606LM 5000K BLACK BODY

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/MW1	MICROWAVE SENSOR
/DMW	DIMMABLE MICROWAVE SENSOR

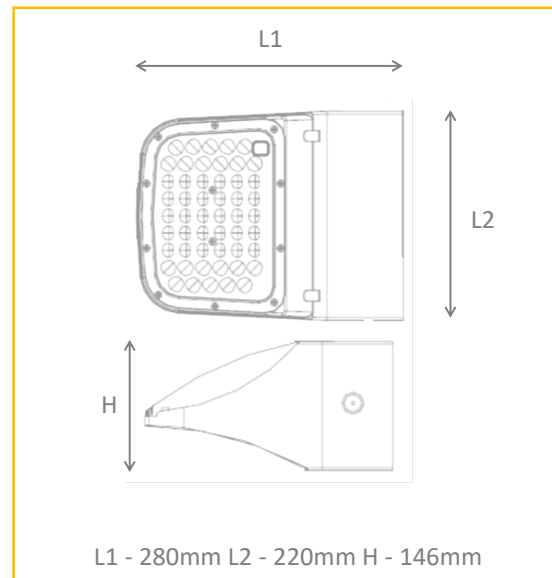

Ordering Format: Product Code / Option

Example: UB/25/5K/BK/M3



# Wickford



## APPLICATIONS

- Building perimeters
- Landscapes
- Car Parks
- Lift Lobbies

## CONSTRUCTION


- Die-cast aluminium body
- Chromate conversion powder coated
- Lumalens diffuser
- One piece flow gasket

## TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- CCT 4000K

## DIMENSIONS

ORDER CODE	DESCRIPTION
WK/23/4K/BK/OP	WICKFORD 23W 2780LM FINISHED BLACK
WK/45/4K/BK/OP	WICKFORD 45W 5500LM FINISHED BLACK

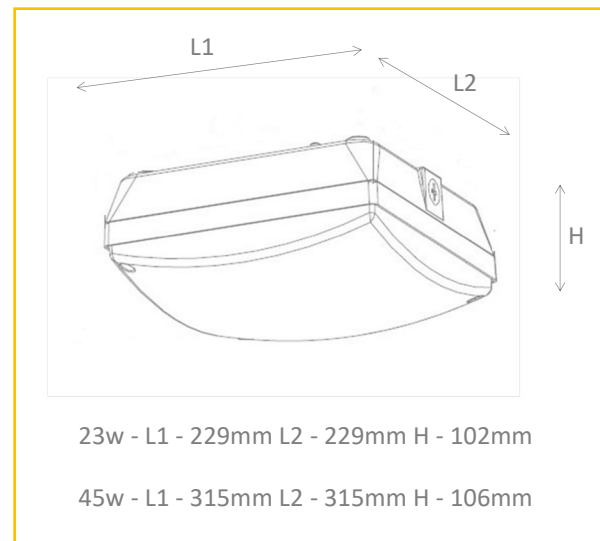

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMERGENCY
/DALI	TOUCH/DALI DIMMING
/MW1	MICROWAVE SENSOR
/DMW	DIMMABLE MICROWAVE SENSOR

Ordering Format: Product Code / Option  
Example: WK/23/4K/BK/OP/M3



# Winchester



## APPLICATIONS

- Pathways
- Pedestrian areas
- Car parks

## CONSTRUCTION


- Extruded aluminium body
- Polycarbonate clear diffuser
- Exterior protection powder coating

## TECHNICAL DETAILS

- Root mounted via WIN/7000
- CRI>80
- 2 CCT 3000K & 4000K

## DIMENSIONS

ORDER CODE	DESCRIPTION
WIN/25/D/BK/CCT	WINCHESTER 25W, 2000LM, BLACK, DOME
WIN/25/F/BK/CCT	WINCHESTER 25W, 2000LM, BLACK, FLAT
WIN/25/L/BK/CCT	WINCHESTER 25W, 2000LM, BLACK, LOUVRE

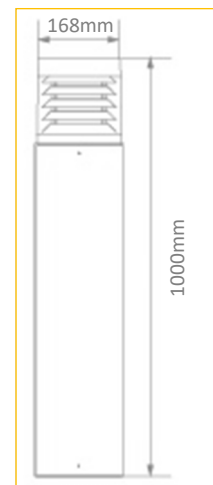

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/WIN/7000	ROOT MOUNTING KIT

Ordering Format: Product Code / Option  
 Example: WIN/25/D/BK/CCT/M3



# Recessed



Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal



## APPLICATIONS

- Vets
- Hospital
- Surgery
- Laboratory


## CONSTRUCTION

- Fabricated steel body epoxy powder coated
- Fabricated steel frame with wishbone clips
- Silicone gaskets
- Satin diffuser
- Stainless fixings

## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K, 5000K
- Suitable for exposed Tee ceiling

## DIMENSIONS

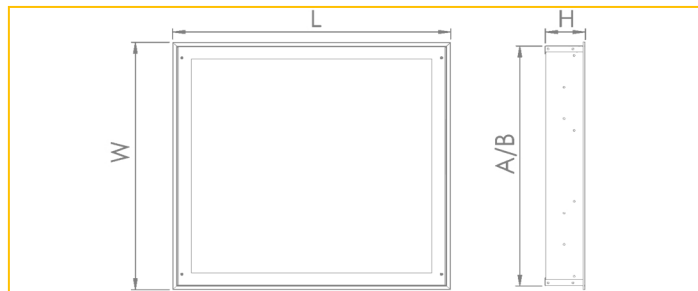

L, mm	W, mm	H, mm	A, mm	B, mm
595	595	75	576	578
		85		
1195	295	85	1177	278
	595		1177	578
1495	295	85	1477	278

PRODUCT CODE	DESCRIPTION
CLN/26/4K/65	600 X 600, 26W, 4K, 3,322LM, IP65
CLN/33/4K/65	600 X 600, 33W, 4K, 4,332LM, IP65
CLN/34/4K/65	1200 X 300, 34W, 4K, 4,429LM, IP65
CLN/49/4K/65	1200 X 300, 49W, 4K, 6,137LM, IP65
CLN/42/4K/65	1500 X 300, 42W, 4K, 5,537LM, IP65
CLN/60/4K/65	1500 X 300, 60W, 4K, 7,671LM, IP65

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option

Example: CLN/26/4K/65/DALI







## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms


## CONSTRUCTION

- Fabricated sheet metal epoxy powder Coated white
- Suitable for exposed Tee
- Satin Opal diffuser
- Micro-prism option

## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Life 100,000hrs L80/B10

## DIMENSIONS

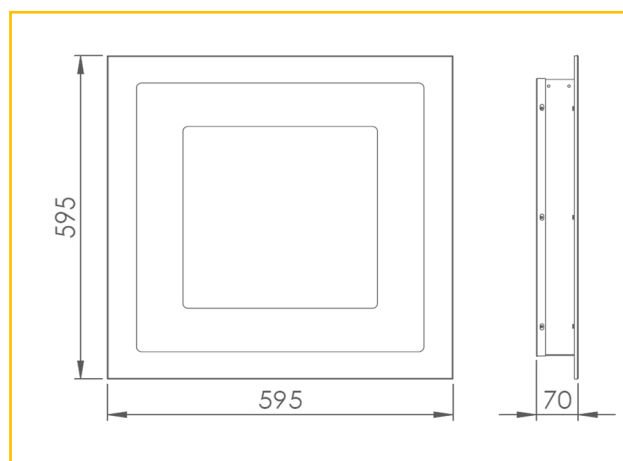

PRODUCT CODE	DESCRIPTION
CS/30/4K/WH	CORONA 30W 3234LM WHITE BODY
CS/45/4K/WH	CORONA 45W 4542LM WHITE BODY
CS/58/4K/WH	CORONA 58W 6492LM WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/MPO	MICRO-PRISM OPTIC
/PB	PLASTERBOARD FIXING KIT

Ordering Format: Product Code / Option

Example: CS/30/4K/WH/DALI





## APPLICATIONS

- Reception
- Corridors
- Canteens
- Core Areas

## CONSTRUCTION

- Fabricated steel body
- Epoxy powder coated white
- Steel side retaining brackets
- Opal PMMA diffuser


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- Life 100,000hrs L80/B50
- CCT Options 3000K, 4000K

ORDER CODE	DESCRIPTION
DA/18/4K/OP/WH	DARTFORD, 4K, 1898LM, 326MM DIA
DA/27/4K/OP/WH	DARTFORD, 4K, 2574LM, 326MM DIA
DA/25/4K/OP/WH	DARTFORD, 4K, 2876LM, 476MM DIA
DA/36/4K/OP/WH	DARTFORD, 4K, 3914LM, 476MM DIA
DA/54/4K/OP/WH	DARTFORD, 4K, 6275LM, 624MM DIA
DA/78/4K/OP/WH	DARTFORD, 4K, 8540LM, 624MM DIA
DA/79/4K/OP/WH	DARTFORD, 4K, 8790LM, 922MM DIA
DA/100/4K/OP/WH	DARTFORD, 4K, 10847LM, 922MM DIA

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY

## DIMENSIONS

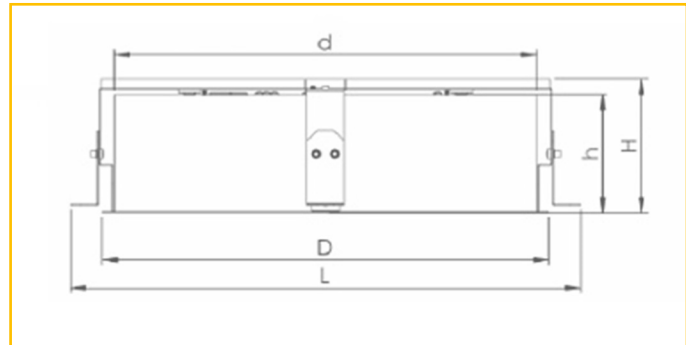


d, mm	D, mm	D1, mm	H, mm	h, mm	L, mm
300	326	310	143	126	395
450	476	460	143	126	545
600	624	610	153	136	690
900	922	910	153	136	995

Ordering Format: Product Code / Option

Example: DA/18/4K/OP/WH/DALI



# Delta

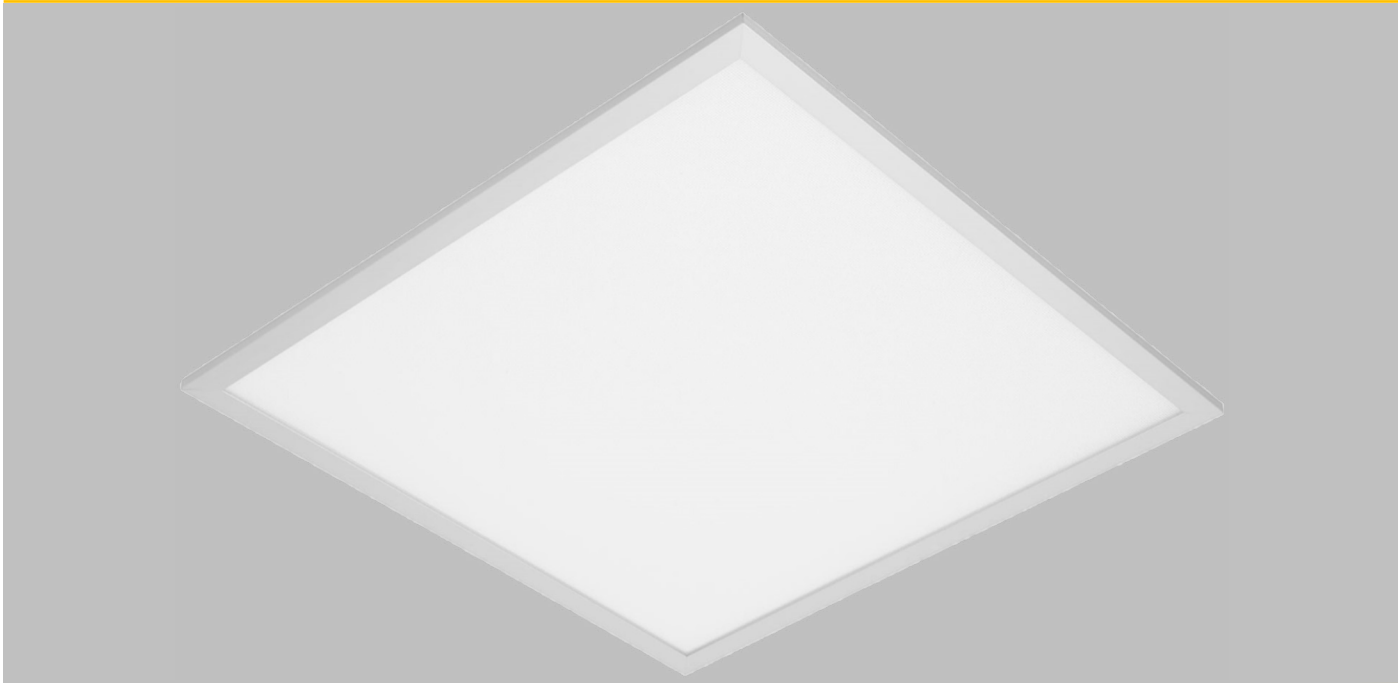

## APPLICATIONS

- Classrooms
- Meeting Rooms
- Reception
- Multi Function Rooms

## CONSTRUCTION

- Extruded aluminium bezel
- Suitable for exposed Tee


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K, 6000K

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
DL/36/CC/4K	DELTA 36W, 3,400LM, 4000K
DL/27/CC/4K	DELTA 27W, 3,150LM, 4000K

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/SMK6	SURFACE MOUNTING KIT
/BTC	CASAMBI WIRELESS CONTROL
/PB	PLASTERBORD RECESSING KIT

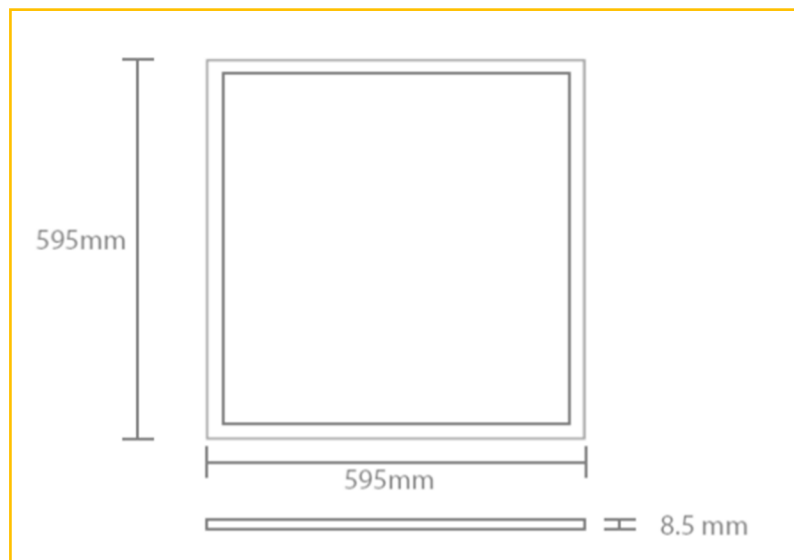


Ordering Format: Product Code / Option

Example: DL/36/CC/4K/DALI

IP20



# Delta 65

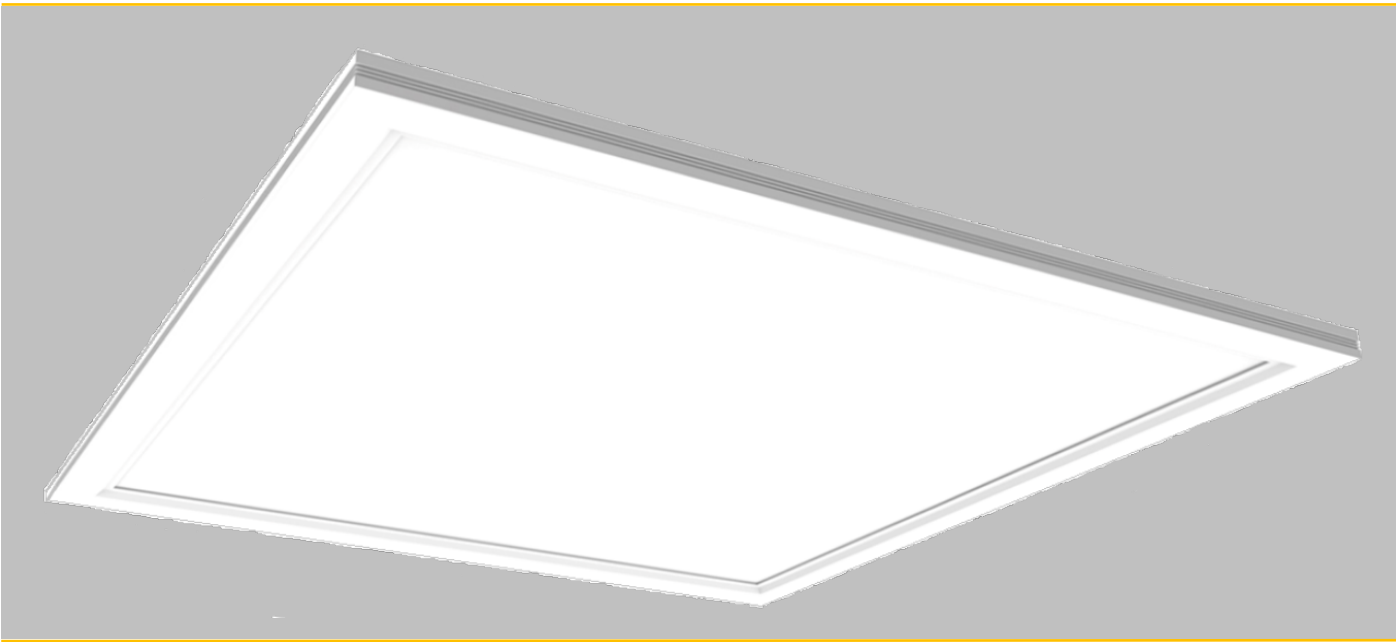

## APPLICATIONS

- Vets
- Hospital
- Surgery
- Preparation areas

## CONSTRUCTION

- Extruded aluminium bezel
- Suitable for exposed Tee
- Opal diffuser


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K, 5000K

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
DL65/27/4K/FF	DELTA 65 27W, 3,100LM 4K, IP65 FRONT FACE
DL65/37/4K/FS	DELTA 65 37W, 4,200LM 4K, IP65 FULLY SEALED

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

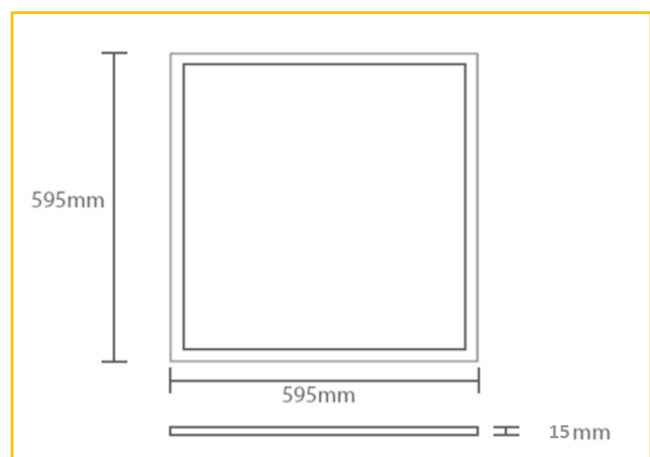


Ordering Format: Product Code / Option

Example: DL65/27/4K/FF/DALI

IP65



# Delta Plus

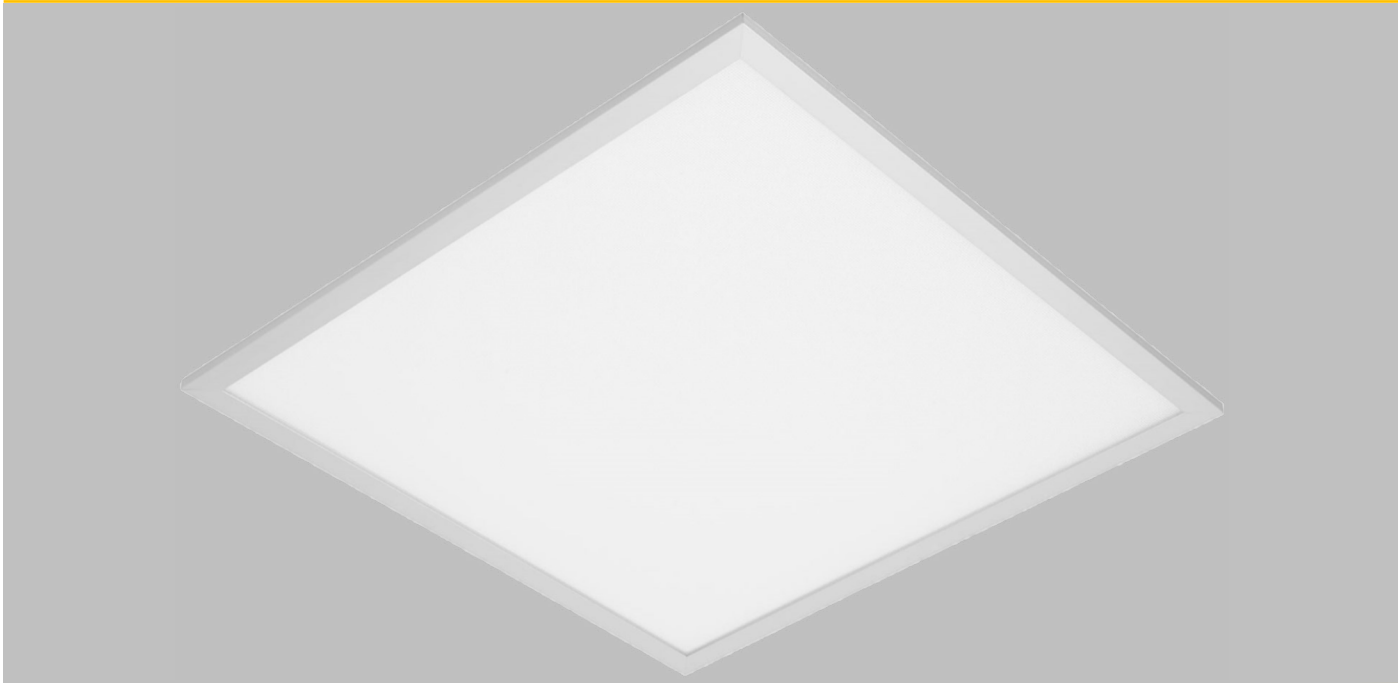

## APPLICATIONS

- Classrooms
- Meeting Rooms
- Reception
- Multi Function Rooms

## CONSTRUCTION

- Extruded aluminium bezel
- Suitable for exposed Tee


## TECHNICAL DETAILS

- CRI>80
- CCT 4000K

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
DL+/35/4K/PW	DELTA +, 35W, 4K, 3,400lm POLAR
DL+/35/4K/UGR	DELTA +, 35W, 4K, 3,400lm UGR>19


OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY FACILITY
/D3	3HR DALI EMERGENCY FACILITY
/SMK 6	SURFACE MOUNTING KIT
/BTC	CASAMBI WIRELESS CONTROL
/PB	PLASTERBOARD FIXING KIT

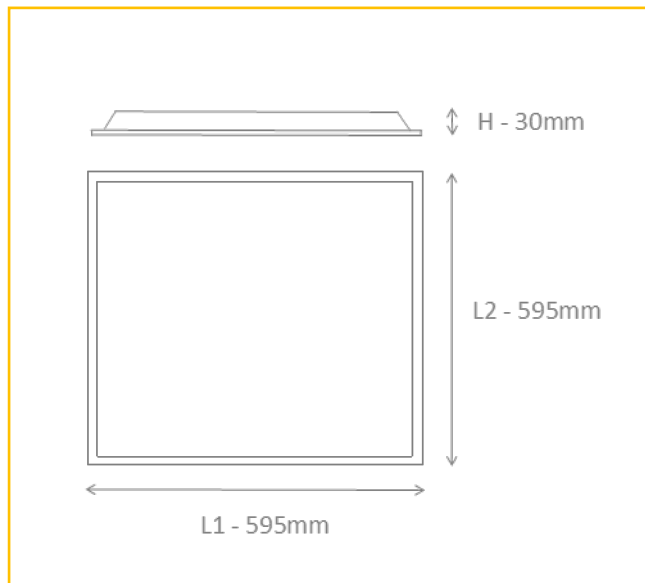

Ordering Format: Product Code / Option  
Example: DL+/35/4K/DALI



# Delta Pro

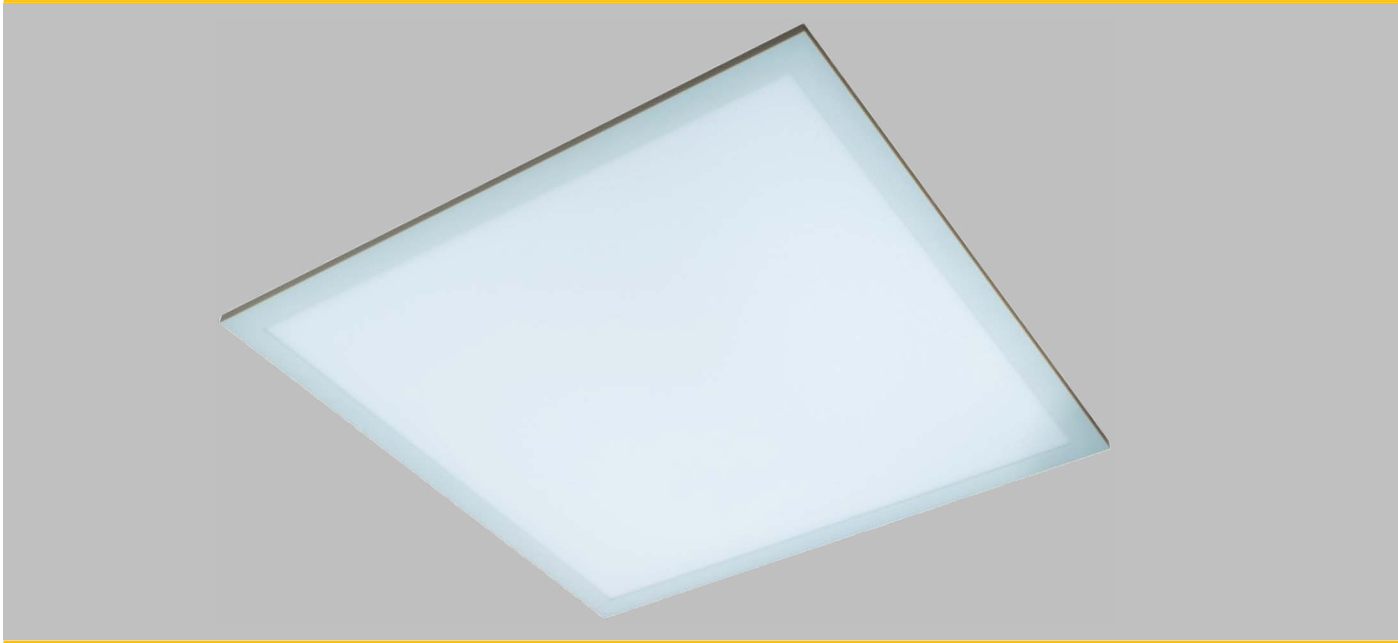

## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms

## CONSTRUCTION

- Extruded aluminium bezel
- Suitable for exposed Tee
- Micro-prism diffuser UGR<19


## TECHNICAL DETAILS

- CRI>80
- Switchable CCT 3K,4K,6K
- Switchable power 30-40w

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
DLP/30/4K/WH	DELTA PRO, 30W, 4K, 3,311lm, UGR<19
DLP/32/4K/WH	DELTA PRO, 32W, 4K, 3,526lm, UGR>19
DLP/36/4K/WH	DELTA PRO, 36W, 4K, 3,884lm, UGR>19
DLP/40/4K/WH	DELTA PRO, 40W, 4K, 4,293lm, UGR>19

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL
/SMK6	600 x 600 SURFACE MOUNTING KIT
/PB	PLASTERBOARD RECESSING KIT
/SUS-1M	SUSPENSION KIT 1MTR

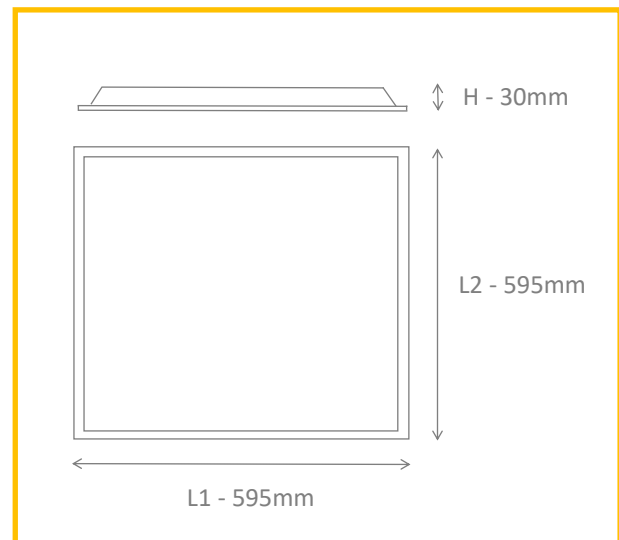

Ordering Format: Product Code / Option  
 Example: DLP/30/4K/WH/DALI







## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms

## CONSTRUCTION

- Fabricated sheet metal epoxy powder Coated white
- Suitable for exposed Tee
- Satin Opal diffuser
- Micro-prism option


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Life 100,000hrs L80/B10

PRODUCT CODE	DESCRIPTION
DT/26/4K/WH	DENTON 26W 2619LM WHITE BODY
DT/38/4K/WH	DENTON 38W 3683LM WHITE BODY
DT/55/4K/WH	DENTON 55W 5106LM WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/MPO	MICRO-PRISM OPTIC
/PB	PLASTERBOARD RECESS KIT

## DIMENSIONS

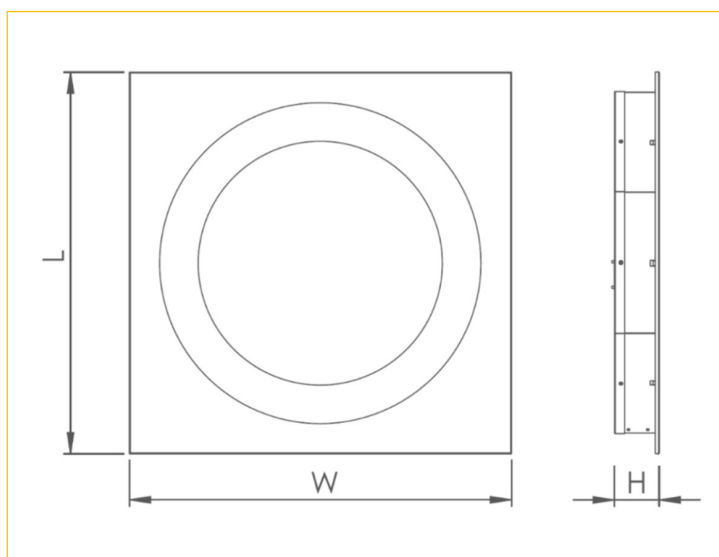

L1 - 595mm W - 595mm H - 70mm

Ordering Format: Product Code / Option

Example: DT/26/4K/WH/DALI





## APPLICATIONS

- Offices
- Meeting Rooms
- Reception

## CONSTRUCTION

- Fabricated steel body, aluminium bezel
- Suitable for exposed Tee
- Opal Polar frost diffuser


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Life - 105000/L80B50

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
ER/26/4K/WH/MPO	ERITH, 26W, 4K, 3,119lm , RAL9003
ER/34/4K/WH/MPO	ERITH, 34W, 4K, 4,245lm, RAL9003

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/BTC	Casambi Wireless Control
/TW	Tuneable White 2700 - 6500K
/PMF	Plasterboard mounting frame

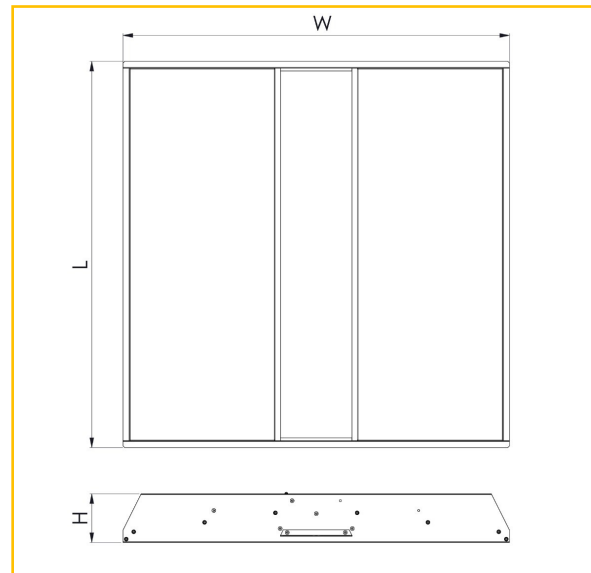


L - 595 x W - 595 x H - 75mm

Ordering Format: Product Code / Option

Example: ER/26/4K/WH/MPO/DALI



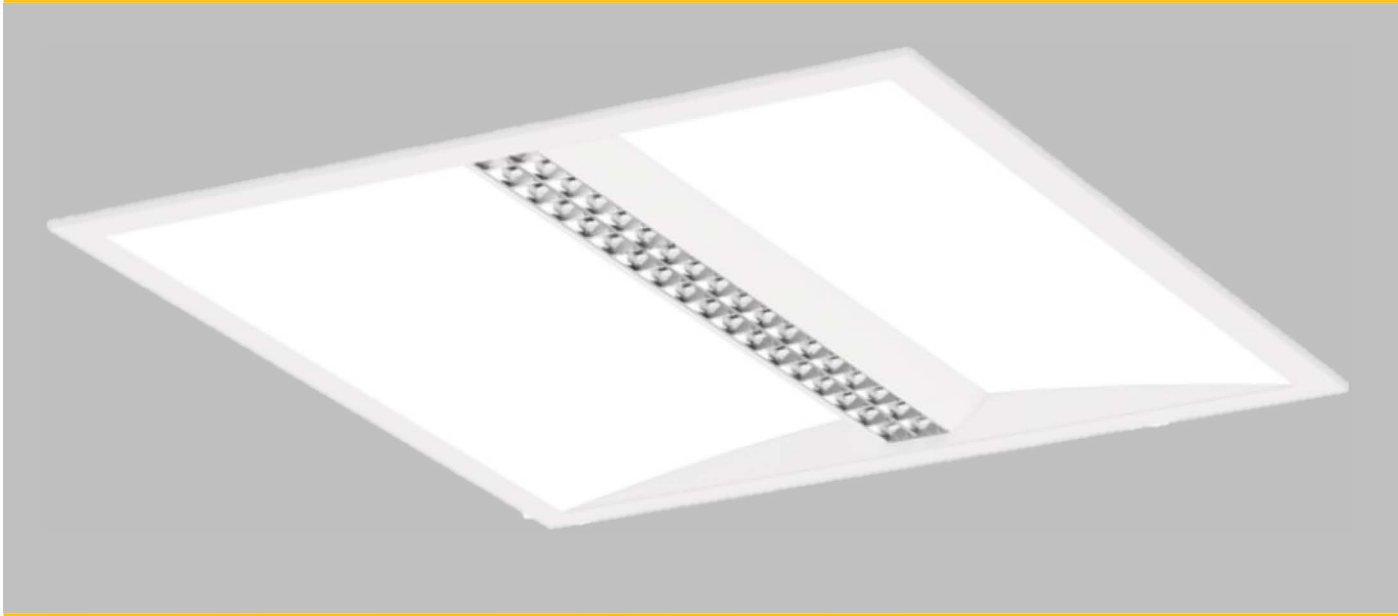

## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms

## CONSTRUCTION

- Fabricated Sheet metal housing
- Epoxy powder coated white
- Suitable for exposed Tee
- Micro-prism diffuser UGR<19
- Parabolic Louvre

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K

PRODUCT CODE	DESCRIPTION
IMO/27/4K/PAR/WH	IMOLA 27W, 2943LM, 4K, PAR OPTIC
IMO/36/4K/PAR/WH	IMOLA 36W, 3924LM, 4K, PAR OPTIC


OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/MPO	MICRO-PRISM OPTIC

\*\*Suffix PAR to MPO for micro-prism optic\*\*

Ordering Format: Product Code / Option

Example: IMO/27/4K/PAR/WH/DALI


## DIMENSIONS

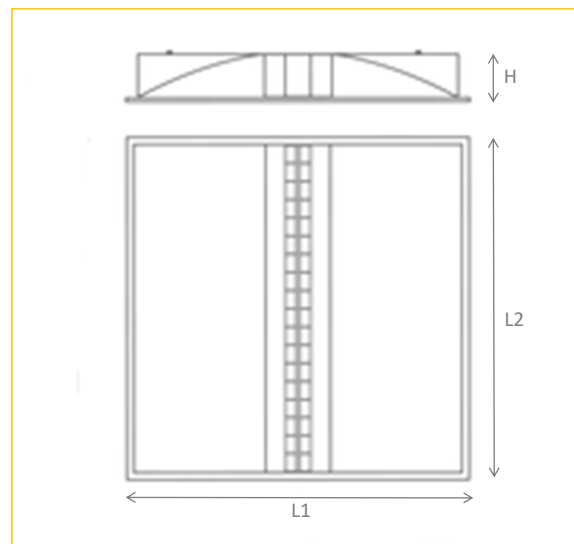

L1 - 595mm L2 - 595mm - H 70mm



# Indium

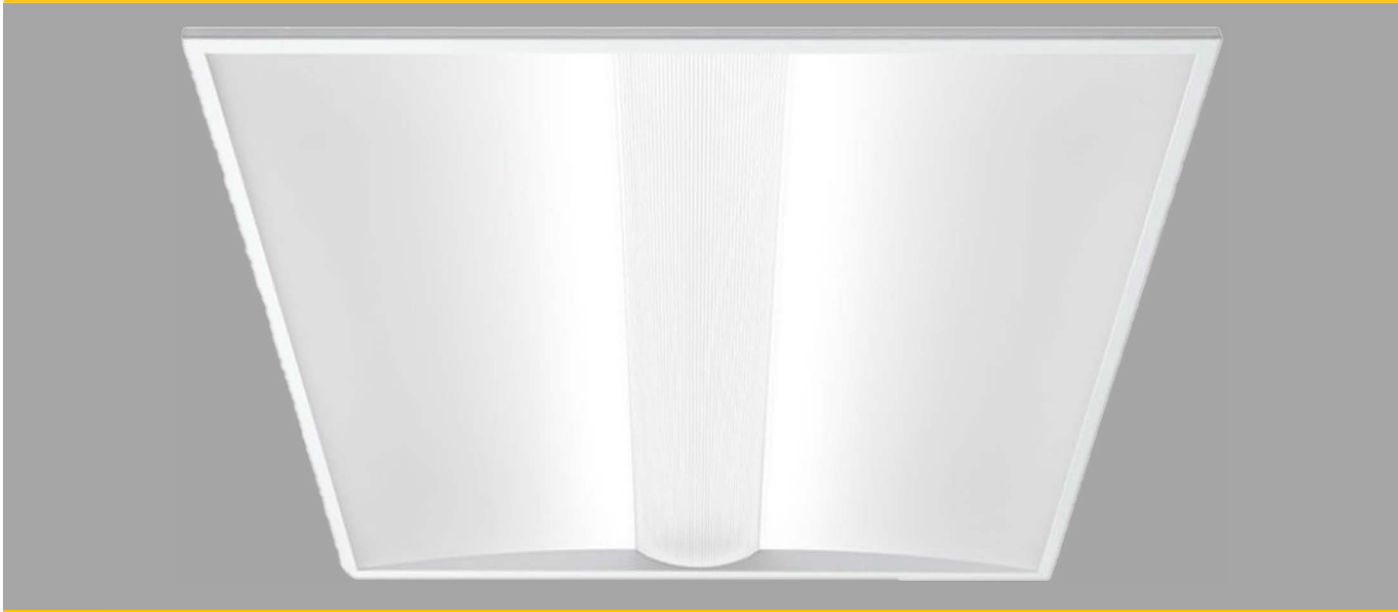

## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms

## CONSTRUCTION

- Fabricated Sheet metal housing
- Epoxy powder coated white
- Suitable for exposed Tee
- Micro-prism diffuser UGR<19

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Tridonic LLE chip set GEN 5
- Branded driver - Tridonic, Helvar, Signify


PRODUCT CODE	DESCRIPTION
IND/25/4K/MPO/WH	INDIUM, 25W, 2850LM, 4K , MPO, WHITE

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL


Ordering Format: Product Code / Option

Example: IND/25/4K/MPO/WH/DALI

## DIMENSIONS

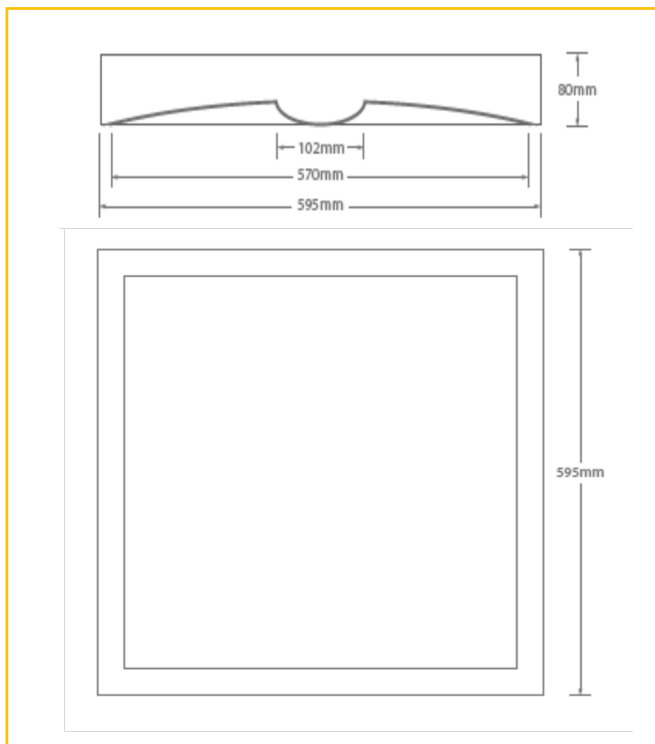

# Lina 'R'

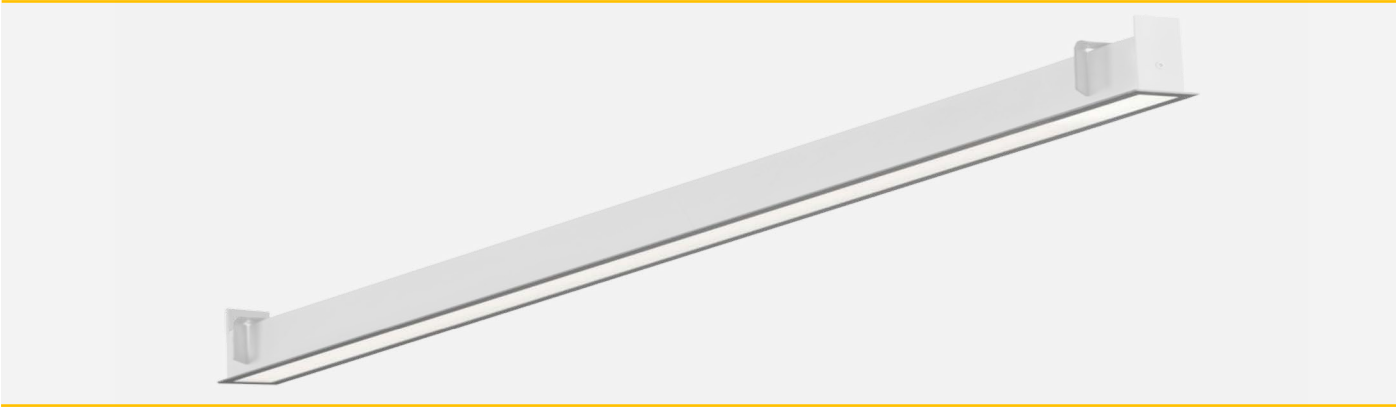

## APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices


## CONSTRUCTION

- Extruded aluminium body
- Aluminium end caps
- Polar frost or Micro-Prism Optic


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K, 5000K
- Trim colour options WH, BK, RAL

## EXAMPLE DIMENSIONS

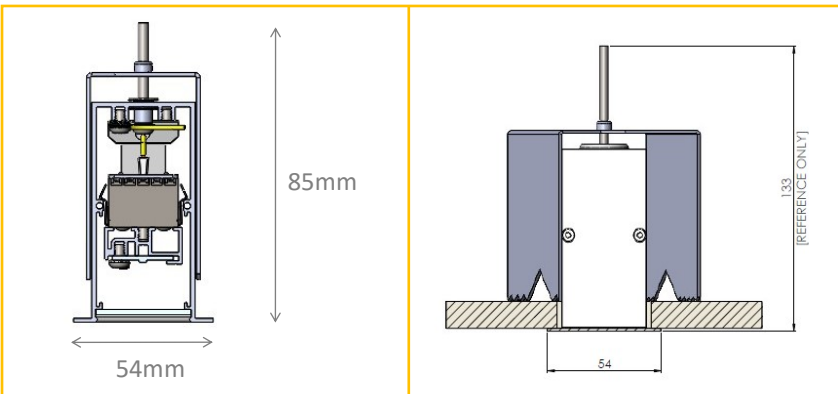


OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL

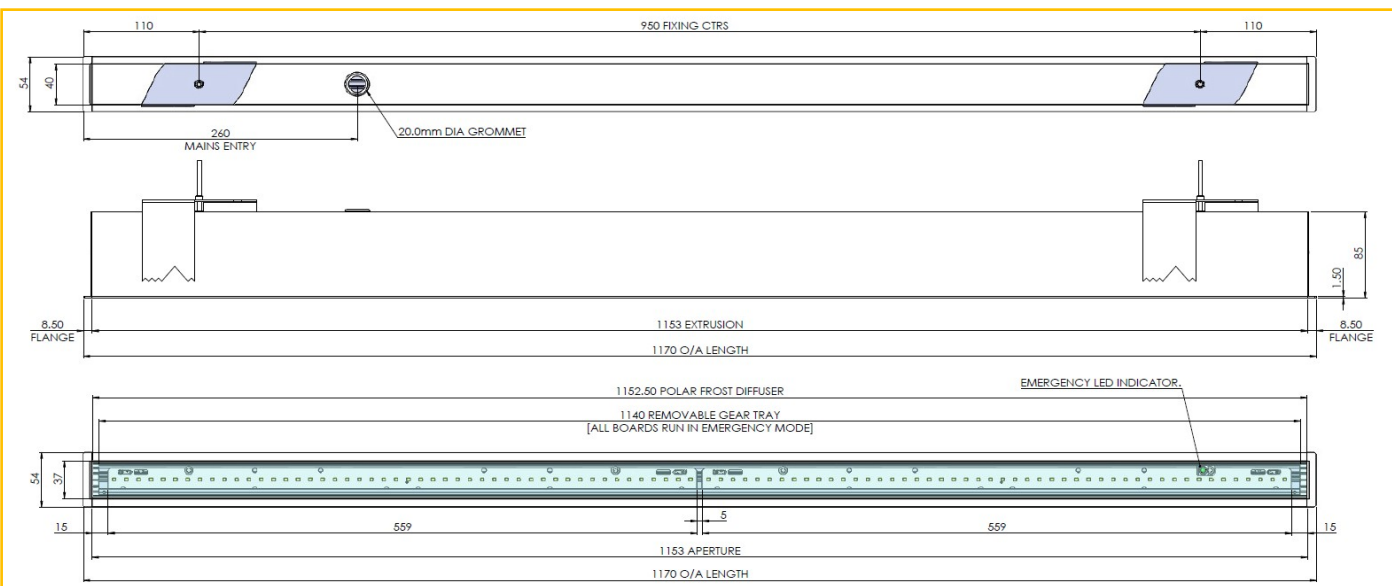

\*Note Lina R is a custom made product and available in various lengths and wattages please speak to our sales team with you requirements and a custom quotation will be raise against your project\*



# Lustre 'R'

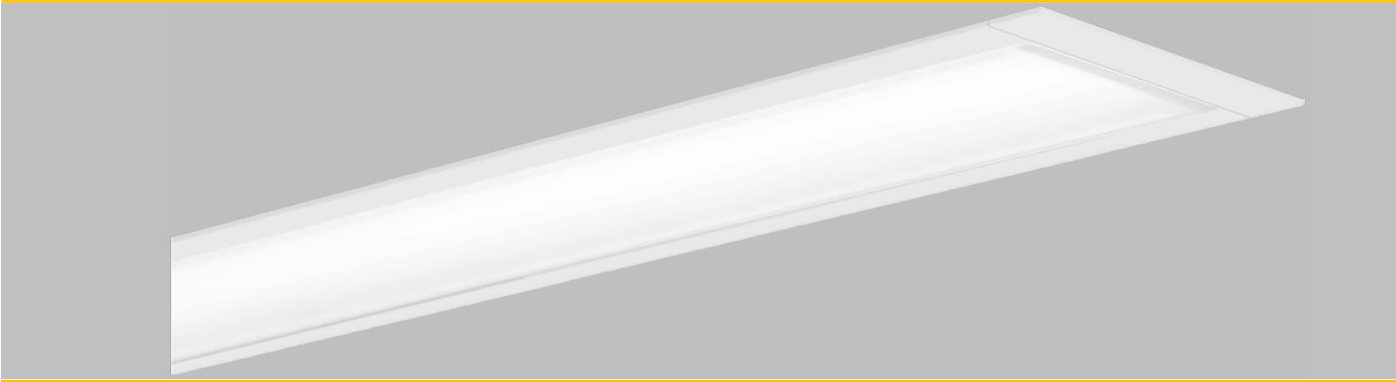

## APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

## CONSTRUCTION


- Extruded aluminium body
- Aluminium end caps
- TP(a) opal lens

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Tridonic LED's & driver
- Lumen depreciation L80/F10 @60,000 hours

## DIMENSIONS

PRODUCT CODE	COLOUR TEMP (K)	STD (LM)	LO (LM)	HO (LM)	LENGTH
LRE/850/3K/WH	3000 K	1800	1300	2700	850 MM
LRE/850/4K/WH	4000 K	1900	1350	2825	850 MM
LRE/1200/3K/WH	3000 K	2700	1900	4025	1200 MM
LRE/1200/4K/WH	4000 K	2825	1975	4225	1200 MM
LRE/1500/3K/WH	3000 K	3300	2325	4925	1500 MM
LRE/1500/4K/WH	4000 K	3450	2425	5175	1500 MM

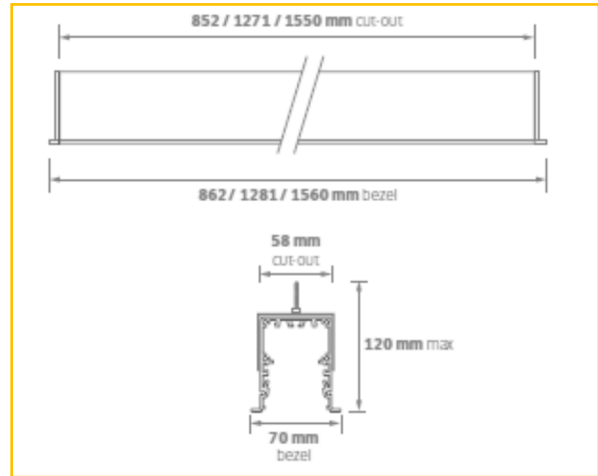


OPTIONS	DESCRIPTION
/DALI	TOUCH DIM / DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/SE	END CAPS
/JK	JOINING KIT INC WIRING LINKS
/LO	LOW OUTPUT
/HO	HIGH OUTPUT
/LG	LOW GLARE PRISMATIC DIFFUSER
/PT001	DIFFUSER EXTRACT TOOL

## CONTINUOUS MOUNTING



\*\*\*Suffix code with SE for Start/End piece\*\*\*



/LG

Low glare diffuser



/PT001

Diffuser Extract Tool

\*Note STD (LM) supplied as standard suffix end of code for LO or HO output\*

IP20





# Phantom



## APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms

## CONSTRUCTION

- Fabricated sheet metal epoxy powder Coated white
- Suitable for exposed Tee
- Opal acrylic diffuser


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K

PRODUCT CODE	DESCRIPTION
PH/20/4K/WH	PHANTOM 20W 2725LM 4000K
PH/25/4K/WH	PHANTOM 25W 3350LM 4000K
PH/30/4K/WH	PHANTOM 30W 3900LM 4000K
PH/35/4K/WH	PHANTOM 35W 4500LM 4000K

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL

## DIMENSIONS

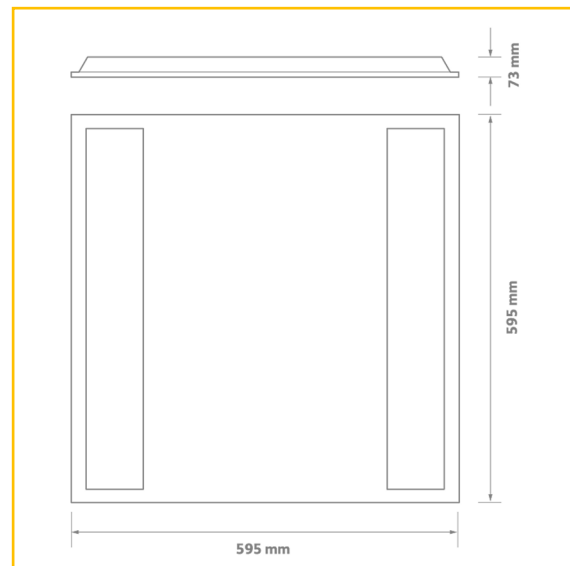

Ordering Format: Product Code / Option

Example: PH/20/4K/WH/DALI



# Surface & Wall



Track

Suspended

Surface & Wall

Recessed

Exterior


Emergency

Downlighters

Architectural & Feature

Anti-Vandal

# Academy

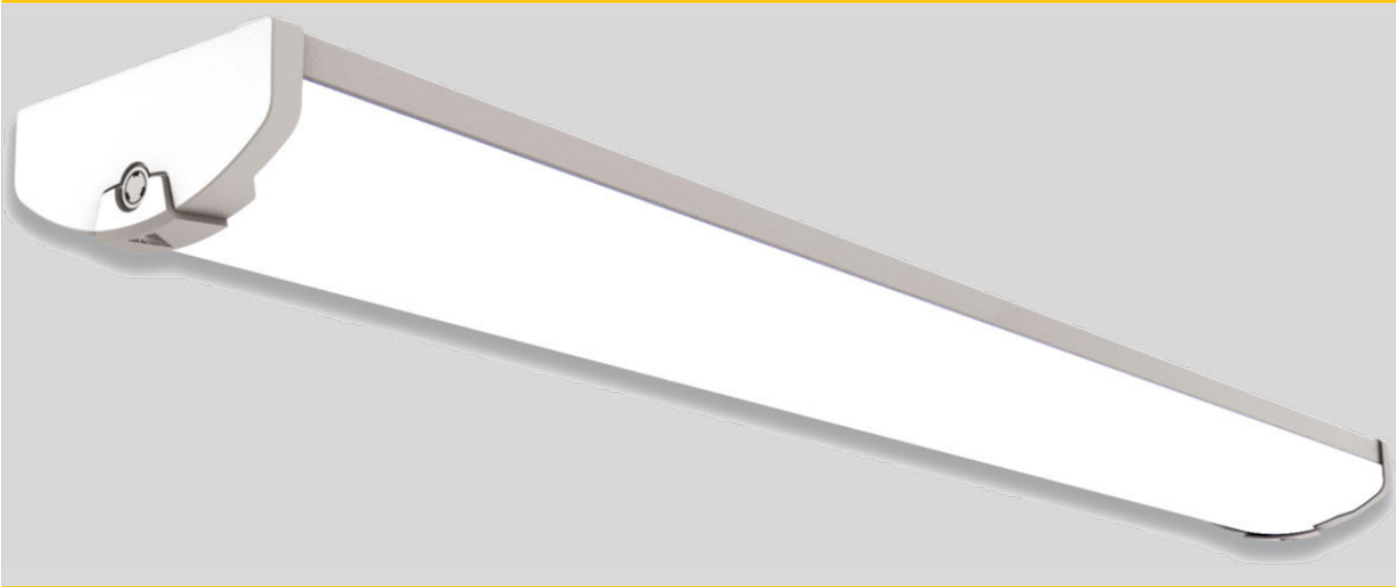

## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION

- Fabricated sheet metal base epoxy powder Coated white
- Polycarbonate diffuser
- Polycarbonate captive end caps


## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Tridonic Driver
- Epistar chip set

PRODUCT CODE	DESCRIPTION
ACM/20/4K/WH	ACADEMY 20W 3125LM 4000K
ACM/28/4K/WH	ACADEMY 28W 4000LM 4000K
ACM/32/4K/WH	ACADEMY 32W 4700LM 4000K
ACM/41/4K/WH	ACADEMY 41W 6000LM 4000K

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR
/DMW	DALI MICROWAVE SENSOR

## DIMENSIONS

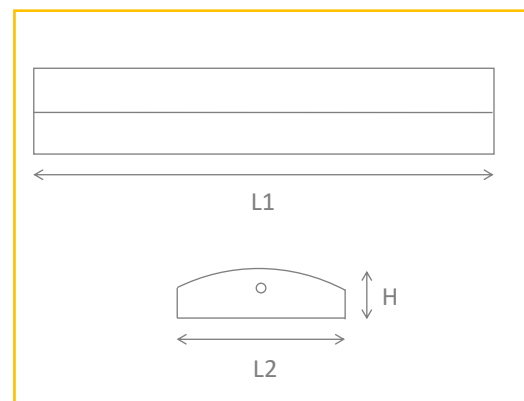

L1 - 20/28w 1200mm x L2 175mm x 75mm


L1 - 33/41w 1500mm x L2 175mm x 75mm

Ordering Format: Product Code / Option

Example: ACM/20/4K/WH/DALI



# Ardent

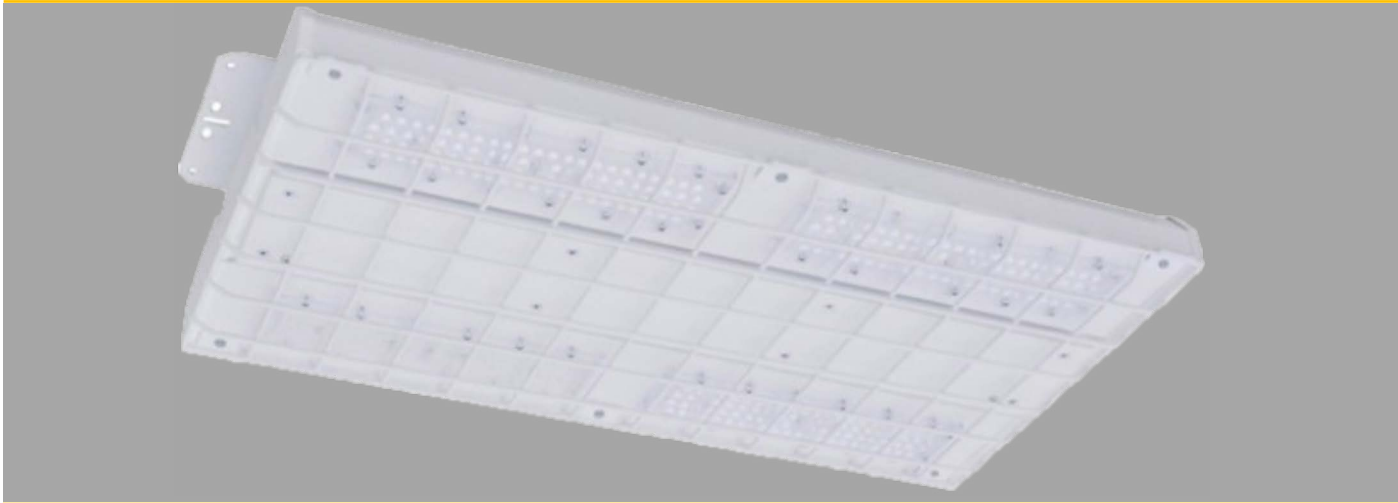

## APPLICATIONS

- Industrial
- Sports Halls
- Distribution Centre
- Gymnasium

## CONSTRUCTION

- Aluminium extruded body
- Epoxy powder coated finish
- Steel wire guard

## TECHNICAL DETAILS


- CRI >80
- Suspended or Surface mounted
- Samsung / Tridonic Chip set
- 4000K
- IK10
- Long life 52,000h L90/B10

PRODUCT CODE	DESCRIPTION
ARD/70/4K/WH/L**	ARDENT 70W, 12350LM 60 DEGREE OPTIC
ARD/80/4K/WH/L**	ARDENT 80W, 12891LM 60 DEGREE OPTIC
ARD/90/4K/WH/L**	ARDENT 90W, 15367LM 60 DEGREE OPTIC
ARD/115/4K/WH/L**	ARDENT 115W, 18863LM 60 DEGREE OPTIC
ARD/135/4K/WH/L**	ARDENT 135W, 22357LM 60 DEGREE OPTIC
ARD/160/4K/WH/L**	ARDENT 160W, 25649LM 60 DEGREE OPTIC
ARD/170/4K/WH/L**	ARDENT 170W, 28148LM 60 DEGREE OPTIC

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/HBAIR	BTC WIRELESS MASTER SENSOR 16MTR
/HBPIR	FIXED ON/OFF PIR SENSOR

OPTICS	DESCRIPTION
/L40	40 x 40° BEAM ANGLE
/L30x65	30 x 65° BEAM ANGLE
/L60	60 x 60° BEAM ANGLE
/75	75 x 75° BEAM ANGLE
/90	90 x 90° BEAM ANGLE

## DIMENSIONS

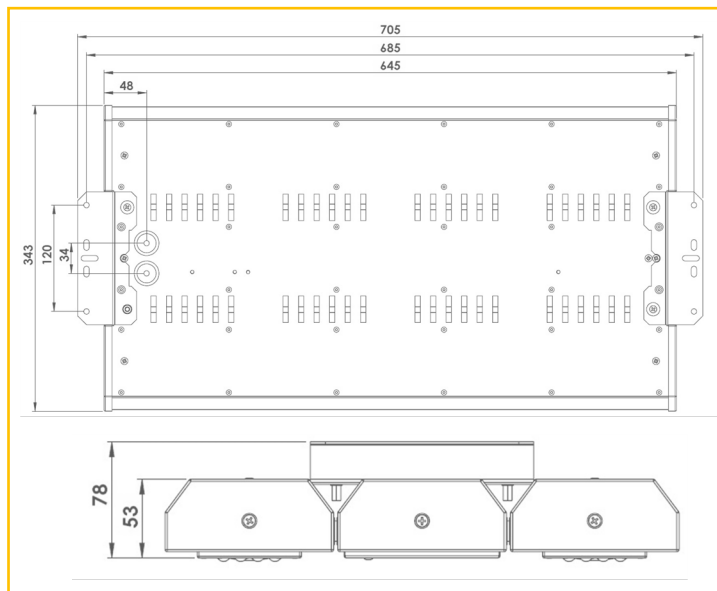


Ordering Format: Product Code / Option

Example: ARD/70/4K/WH/L40/DALI

\*Suffix end of ordering code with required beam angle\*



# Arrow

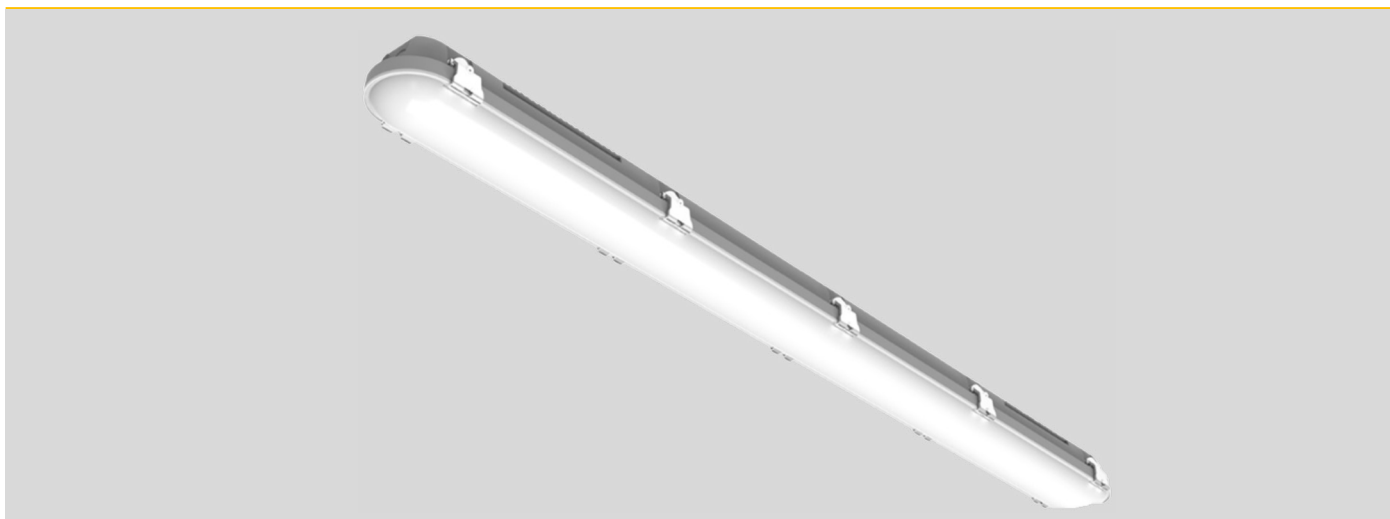

## APPLICATIONS

- Stores
- Car parks
- Food / Clean areas
- Warehouses
- Factories

## CONSTRUCTION

- Extruded PMMA body
- Stainless Steel clips
- Opal diffuser
- IK08 rated impact test to BSEN 2262

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 4000K
- Tridonic Driver

ORDER CODE	DESCRIPTION
ARN/19/4K/65	ARROW 19W 2400LM 4000K GREY BODY
ARN/38/4K/65	ARROW 38W 4750LM 4000K GREY BODY
ARN/30/4K/65	ARROW 30W 3800LM 4000K GREY BODY
ARN/50/4K/65	ARROW 50W 7000LM 4000K GREY BODY

## DIMENSIONS



- 19w A - 1270mm B - 73mm C - 75mm
- 38w A - 1270mm B - 95mm C - 75mm
- 30w A - 1565mm B - 73mm C - 75mm
- 50w A - 1565mm B - 95mm C - 75mm

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/PIR	BATTEN MOUNTED PIR

Ordering Format: Product Code / Option  
Example: ARN/19/4K/65/DALI

IP65



# Aura



## APPLICATIONS

- Toilets
- Corridors
- Store rooms
- Refectory

## CONSTRUCTION

- ABS moulded base
- Opal polycarbonate diffuser
- Twist lock or screwed bezel option


## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Wattages options
- Available in two body sizes

PRODUCT CODE	DESCRIPTION
AUR/13/NT/4K/**	13W AURA 1,500LM 4K BLACK TRIM
AUR/23/NT/4K/**	23W AURA 2,200LM 4K BLACK TRIM

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/CT/**	CURVED BEZEL (WH -White - BK - Black)
/ST/**	SCREWED BEZEL (WH - White - BK - Black)
/MW1	MICROWAVE SENSOR

## DIMENSIONS

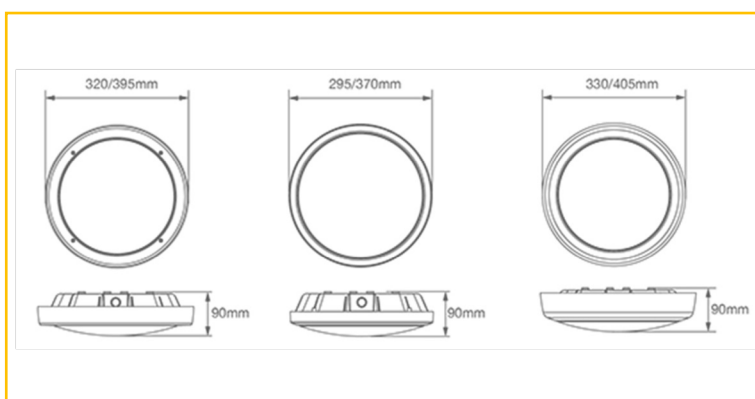

Ordering Format: Product Code / Option

Example: AUR/13/CT/4K/WH/DALI

ST - 320mm/395mm x 90mm      NT - 295mm/370mm x 90mm

CT - 330mm/405mm x 90mm

\*\* Suffix NT with required trim & add colour required to end of code \*\*



# Auraflex



## EXTRUSIONS

PRODUCT CODE	LUMENS	WATTS	TEMP (K)	IP RATING
DLP/5050/60/WW/24/20	1170lm	14.4w	3000K	20
DLP/5050/60/NW/24/20	1180lm	14.4w	4000K	20
DLP/5050/60/RGB/24/20	510lm	14.4w	RGB	20
DLP/5050/60/RGBW/4K/24/20	510lm	19.0w	RGBW	20
DLP/5050/60/WW/24/68	1170lm	14.4w	3000K	68
DLP/5050/60/NW/24/68	1180lm	14.4w	4000K	68
DLP/5050/60/RGB/24/68	510lm	14.4w	RGB	68
DLP/5050/60/RGBW/4K/24/68	510lm	19.0w	RGBW	68



REC-01-2M



STS-01-2M



SQL-01-2M



CR-01-2M

## POWER SUPPLIES

PRODUCT CODE	POWER	IP RATING
CD 1X35/CV/24	1 X 35W	IP20
CD 1X60/CV/24	1 X 60W	IP20
CD 1X100/CV/24	1 X 100W	IP20
CD 1X120/CV/24	1 X 120W	IP20
CD1X200/CV/24	1 X 200W	IP67

## CONTROLS

PRODUCT CODE	DESCRIPTION
AL/1009FA	WIRELESS RGBW RECEIVER
AL/WMP	WIRELESS CONTROL PLATE
AL/HHC	WIRELESS REMOTE CONTROL
AL-1009FA/DMX	WIRED RGBW DMX DECODER
AL/WMP/DMX	WIRED CONTROL PLATE DMX

ALD Lighting Solutions can cut and make bespoke linear lengths to suit your requirements.

We can soldered end feeds with exact lengths of cable required.

For further information please contact our sales office.


## CONTROLS



AL/WMP



AL/1009FA



AL/HHC

## CONNECTORS



EF-001

IP20/  
68





# Balcombe



## APPLICATIONS

- Toilets
- Corridors
- Bedrooms
- Stores

## CONSTRUCTION

- Polycarbonate body
- Opal homogenous diffuser

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K, 6000K
- Triac Dimmable
- Epistar LED's L70 B10 - 50,000hrs


ORDER CODE	DESCRIPTION
BA/12/4K/OP/WH	BALCOMBE 12W 1100LM 4000K WHITE
BA/18/4K/OP/WH	BALCOMBE 18W 1620LM 4000K WHITE
BA/25/4K/OP/WH	BALCOMBE 25W 2150LM 4000K WHITE

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option  
 Example: BA/12/4K/OP/WH/M3

\*/M3 & MW1 not available in 12w version\*


## DIMENSIONS

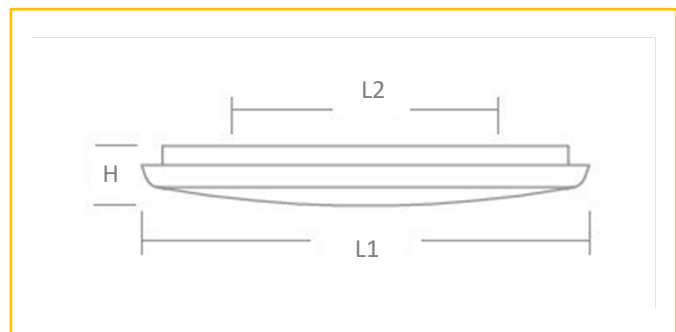

- 12w - L1 - 200mm L2 - 150mm H - 48mm
- 18w - L1 - 300mm L2 - 150mm H - 48mm
- 25w - L1 - 300mm L2 - 150mm H - 48mm



# Barnsley

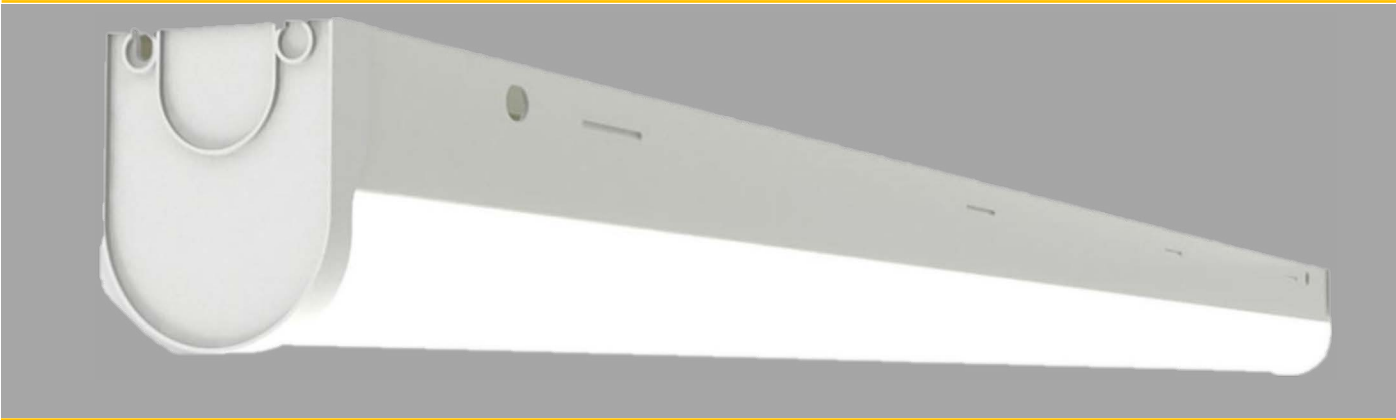

## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION


- Fabricated sheet metal epoxy powder Coated white
- Polycarbonate diffuser
- Polycarbonate captive end caps

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Tridonic Driver
- Tridonic chip set L80 B10

PRODUCT CODE	DESCRIPTION
BRN/16/4K/WH	BARNSELY 16W 2,125LM 4000K
BRN/32/4K/WH	BARNSELY 32W 4,250LM 4000K
BRN/27/4K/WH	BARNSELY 27W 3,450LM 4000K
BRN/50/4K/WH	BARNSELY 50W 6,500LM 4000K
BRN/36/4K/WH	BARNSELY 36W 4,800LM 4000K
BRN/71/4K/WH	BARNSELY 71W 9,600LM 4000K

## DIMENSIONS

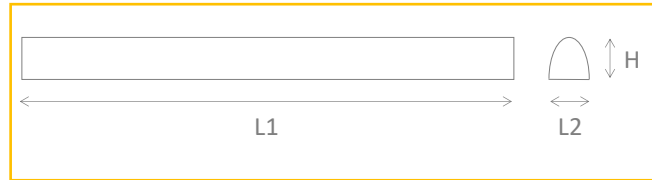

- 16w/32w L1 - 1165mm L2 - 62mm H - 78mm
- 27w/50w L1 - 1460mm L2 - 62mm H - 78mm
- 36w/71w L1 - 1722mm L2 - 62mm H - 78mm

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/PIR	On/Off PIR sensor pod
/DPIR	Programmable PIR pod

Ordering Format: Product Code / Option

Example: BRN/16/4K/WH/M3



# Blade W



## APPLICATIONS


- Car Showroom
- Sports Halls
- Retail
- Classrooms

## CONSTRUCTION


- Steel powder coated Housing
- Polycarbonate optics L30/L75/L90
- Captive fixings
- IK07

## TECHNICAL DETAILS


- CRI>80
- CCT 4000K
- 100,000/L80B50



L90




L70W



L30

## DIMENSIONS

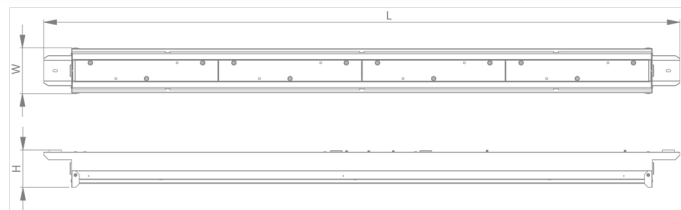

L - 1245/1539mm W - 90mm H - 73mm

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/BTC	Casambi Wireless Control
/MW1	Microwave sensor

PRODUCT CODE	DESCRIPTION
BDW/31/4K/WH/L**	BLADE, 31W, 4K, 4,938LM, FINISHED WHITE
BDW/41/4K/WH/L**	BLADE, 41W,4K, 7,092LM, FINISHED WHITE
BDW/59/4K/WH/L**	BLADE, 59W, 4K, 9,825LM FINISHED WHITE
BDW/38/4K/WH/L**	BLADE, 38W, 4K, 6,173LM FINISHED WHITE
BDW/51/4K/WH/L**	BLADE, 51W, 4K, 8,865LM FINISHED WHITE
BDW/74/4K/WH/L**	BLADE, 74W, 4K, 12,282LM FINISHED WHITE

Ordering Format: Product Code / Option

Example: BDW/31/4K/WH/L90/BTC

(Suffix L\*\* with optic required)

IP65



# Bodium



## APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

## CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard (RAL9003)
- Polar micro-prism diffuser PMMA
- Direct/Indirect

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- UGR<19
- 100,000/L80B50

PRODUCT CODE	DESCRIPTION
BTS/17/4K/WH/UPL	BODIUM, 17W, 4K, DID, 300 x 300, 2,485lm
BTS/25/4K/WH/UPL	BODIUM, 25W, 4K, DID, 450 x 450, 3,742lm
BTS/30/4K/WH/UPL	BODIUM, 30W, 4K, DID, 450 x 450, 4,489lm
BTS/37/4K/WH/UPL	BODIUM, 37W, 4K, DID, 600 x 600, 5,612lm
BTS/59/4K/WH/UPL	BODIUM, 59W, 4K, DID, 900 x 900, 8,932lm
BTS/79/4K/WH/UPL	BODIUM, 79W, 4K, DID, 900 x 900, 11,962lm

## DIMENSIONS

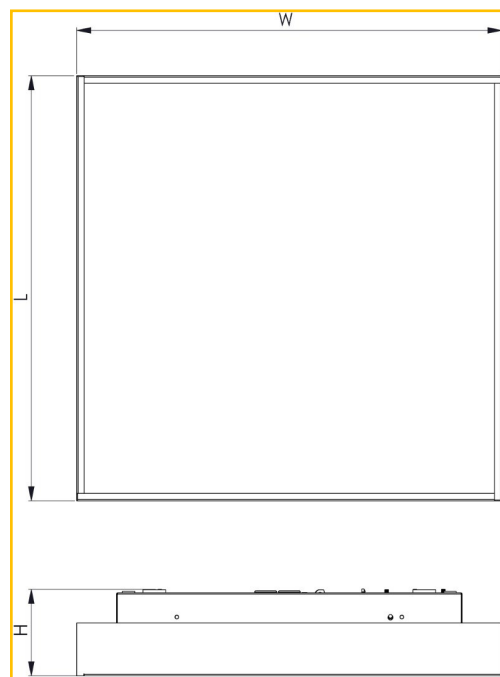

(H - 90mm)

OPTIONS	DESCRIPTION
/DALI	DALI/DSI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/BTC	Casambi wireless control

Ordering Format: Product Code / Option

Example: BTS/17/4K/WH/UPL/BTC

IP20



# Bolney



## APPLICATIONS

- Nursing homes
- Corridors
- Bedrooms
- Communal area

## CONSTRUCTION

- Fabricated sheet metal epoxy powder Coated white
- Frosted glass diffuser


## TECHNICAL DETAILS

- Mounting option
- CRI>80
- CCT Options 3000K, 4000K

PRODUCT CODE	DESCRIPTION
BO/17/4K/OP/WH	BOLNEY 17W 1950LM WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/SMR	SURFACE MOUNTING RING

## DIMENSIONS

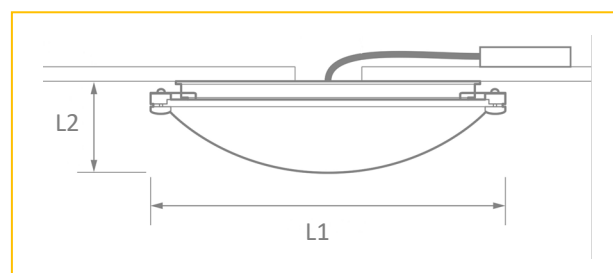

L1 - 400mm L2 - 125mm

Ordering Format: Product Code / Option

Example: BO/17/4K/OP/WH/M3

IP20



# Carina P



## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION


- Fabricated sheet metal epoxy powder Coated white
- Polycarbonate MPO diffuser
- Polycarbonate captive end caps

## TECHNICAL DETAILS

- CRI>80
- IK05
- Tridonic Driver
- Samsung chip set SDM 3
- 130lm + per watt

PRODUCT CODE	DESCRIPTION
CR/15/4K/WH/MPO	CARINA P 15W 2,142LM 4000K
CR/18/4K/WH/MPO	CARINA P 18W 2,525LM 4000K
CR/25/4K/WH/MPO	CARINA P 25W 3,534LM 4000K
CR/35/4K/WH/MPO	CARINA P 35W 5,051LM 4000K
CR/32/4K/WH/MPO	CARINA P 32W 4,410LM 4000K
CR/45/4K/WH/MPO	CARINA P 45W 6,313LM 4000K

## DIMENSIONS

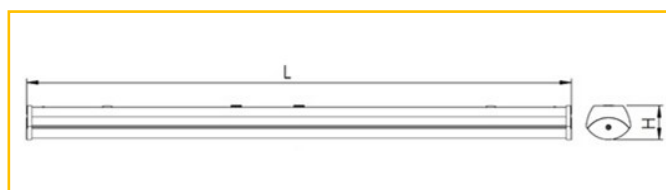

- 15w/18w L - 615mm L2 - 97mm H - 70mm
- 25w/35w L - 1175mm L2 - 97mm H - 70mm
- 32w/45w L - 1475mm L2 - 97mm H - 70mm


OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/PIR	ON/OFF PIR SENSOR POD
/DPIR	DALI ADDRESSABLE PIR POD

Ordering Format: Product Code / Option

Example: CR/15/4K/WH/MPO/M3



# Chant

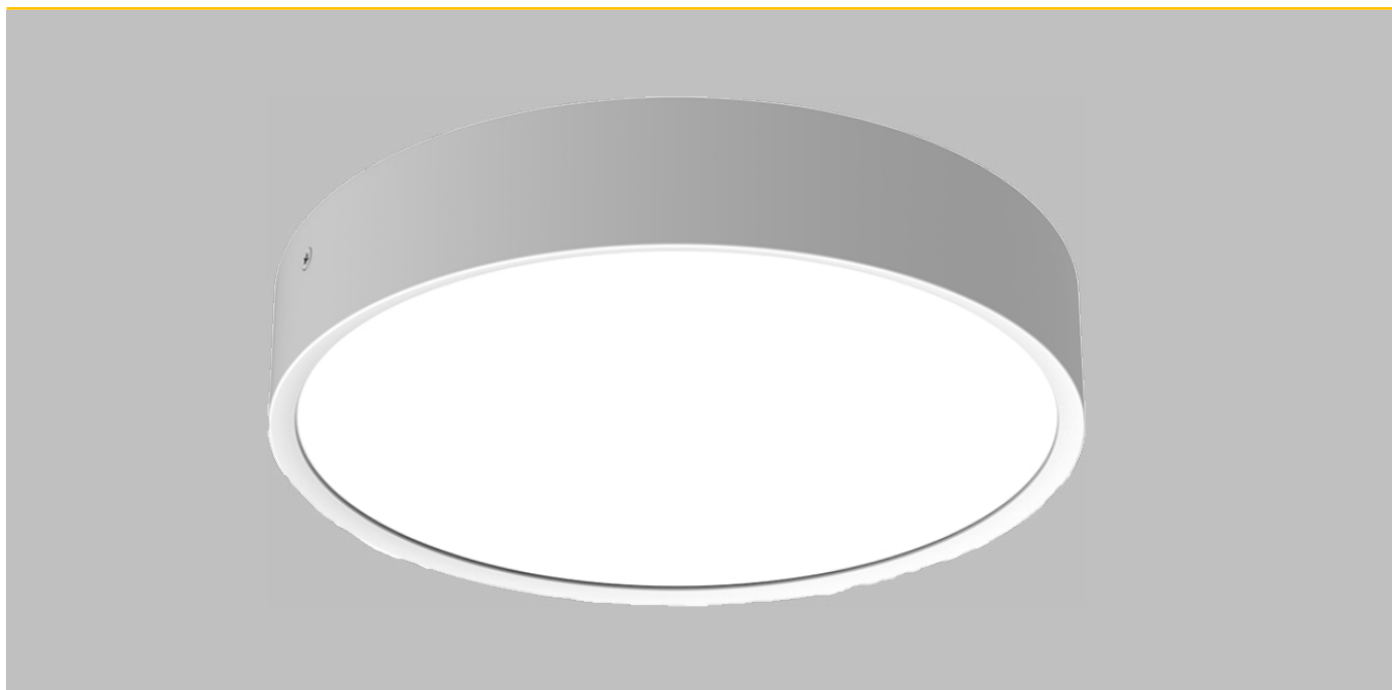

## APPLICATIONS

- Schools
- Communal Areas
- Toilets
- Lobbies

## CONSTRUCTION

- UV PC moulded Housing
- Opal polycarbonate diffuser
- Clip on Bezel

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10
- IP65

PRODUCT CODE	DESCRIPTION
CHT/15/4K/WH	CHANT, 15W, 1,500LM 302MM WHITE BEZEL
CHT/25/4K/WH	CHANT, 25W, 2,500LM 352MM WHITE BEZEL


OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/MW1	MICROWAVE SENSOR
/BK	BLACK TRIM

\*\*Suffix WH to BK for black trim\*\*

Ordering Format: Product Code / Option

Example: CHT/15/4K/WH/M3

## DIMENSIONS

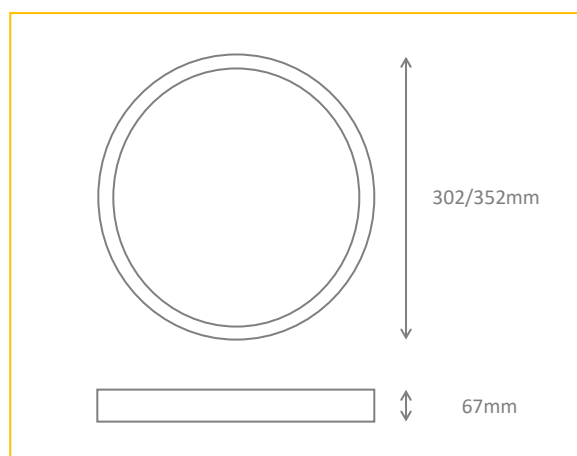



# Clapham



## APPLICATIONS

- Receptions
- Corridors
- Bedrooms
- Offices


## CONSTRUCTION

- Steel fabricated body
- Opal homogenous diffuser
- vertical or horizontal mounting

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Bidirectional light output

## DIMENSIONS

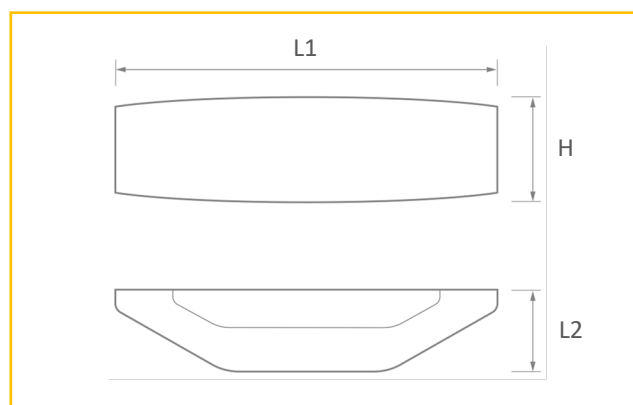

- 9w L1 - 400mm L2 - 110mm H - 81mm
- 16w L1 - 400mm L2 - 110mm H - 81mm
- 24w L1 - 400mm L2 - 110mm H - 81mm

ORDER CODE	DESCRIPTION
CLA/9/4K/WH	CLAPHAM 9W 775LM 4000K WHITE
CLA/16/4K/WH	CLAPHAM 16W 1475LM 4000K WHITE
CLA/24/4K/WH	CLAPHAM 24W 2075LM 4000K WHITE

OPTIONS	DESCRIPTION
/BK	RAL9005 POWDER COATED BLACK
/PCV	PRODUCT COLOUR VARIATION

Ordering Format: Product Code / Option  
Example: CLA/9/4K/WH/BK



# Class



## APPLICATIONS

- Toilets
- Corridors
- Store rooms
- Refectory

## CONSTRUCTION

- ABS moulded base
- Opal polycarbonate diffuser
- Silicone gasket seal

## TECHNICAL DETAILS


- CRI>80
- CCT 3000K, 4000K
- Various Wattages

PRODUCT CODE	DESCRIPTION
CL/14/4K/OP/WH	CLASS 14W 1400LM 4000K WHITE BODY
CL/20/4K/OP/WH	CLASS 20W 1900LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/CHB	CHROME BEZEL RING
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option  
 Example: CL/14/4K/OP/WH/DALI


## DIMENSIONS

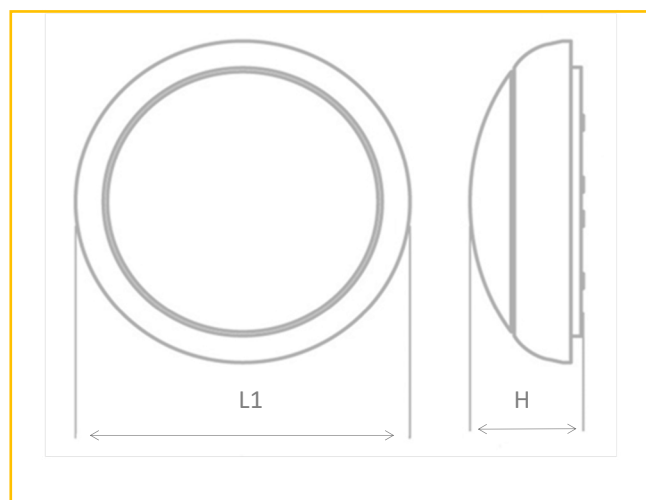

14w L1 - 320mm H - 90mm

20w L1 - 320mm H - 130mm



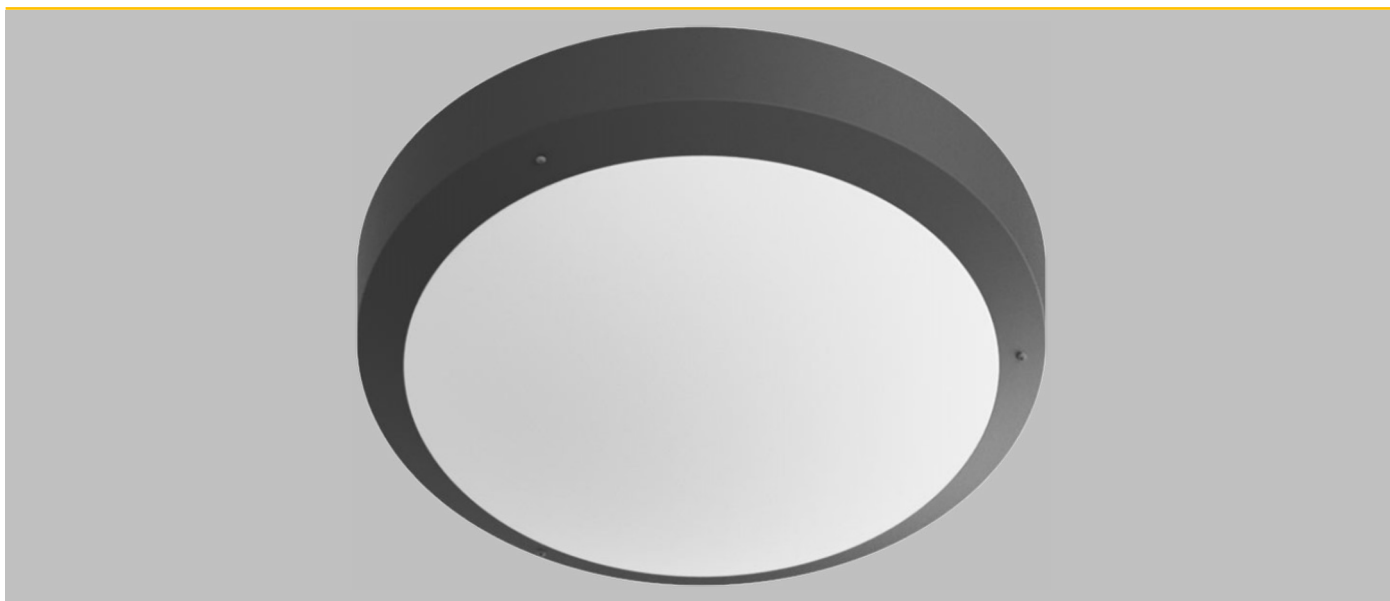

## APPLICATIONS

- Mental health units
- Hospitals
- Schools
- Industrial

## CONSTRUCTION

- TP(a) polycarbonate base
- Opal TP(a) polycarbonate diffuser
- Spun steel bezel epoxy powder coated


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Various Wattages
- IK 10 Rated impact tested to BSEN2262

PRODUCT CODE	DESCRIPTION
COM/17/4K/OP/WH	COMET 17W 2060LM 4000K WHITE BODY
COM/27/4K/OP/WH	COMET 27W 2970LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/PCV	PRODUCT COLOUR VARIATION
/MW1	MICROWAVE SENSOR
/D3	DALI MONITORED EMERGENCY
/ATF	ANTI-TAMPER FIXINGS

## DIMENSIONS

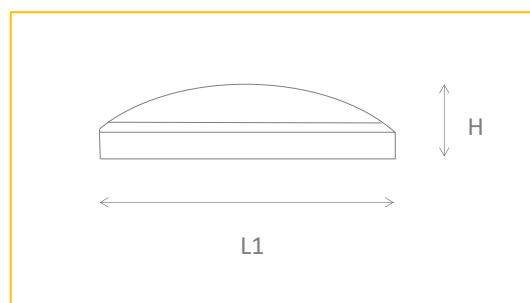

17w L1 - 355mm H - 122mm

27w L1 - 355mm H - 122mm

Ordering Format: Product Code / Option

Example: COM/17/4K/OP/WH/DALI



# Frazer 'S'



## APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

## CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard
- Polar micro-prism diffuser

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Body colour options WH, BK, SG

PRODUCT CODE	DESCRIPTION
FZ/26/4K/SM/WH	FRAZER, 26W, 3,534LM, 1203MM LG
FZ/35/4K/SM/WH	FRAZER, 35W, 5,051LM, 1203MM LG
FZ/42/4K/SM/WH	FRAZER, 42W, 5,785LM, 1203MM LG
FZ/31/4K/SM/WH	FRAZER, 31W, 4,418LM, 1483MM LG
FZ/45/4K/SM/WH	FRAZER, 45W, 6,313LM, 1483MM LG
FZ/52/4K/SM/WH	FRAZER, 52W, 7,231LM, 1483MM LG

## DIMENSIONS

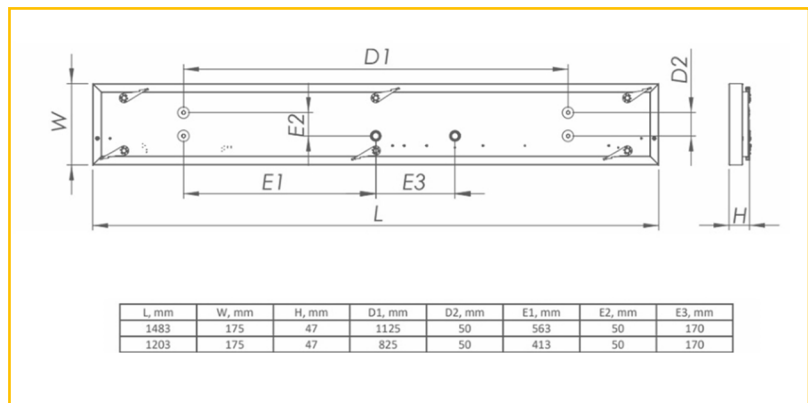

OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL

\*\*Suffix /WH to body colour required\*\*

Ordering Format: Product Code / Option

Example: FZ/26/4K/SM/WH/DALI



# Friston



## APPLICATIONS

- Hospital Bedhead
- Dormitory
- Nursing Homes

## CONSTRUCTION

- Steel fabricated body, epoxy powder coated
- Frosted acrylic diffuser
- horizontal mounting

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- IK05 Mechanical Resistance
- 850° Glow wire tested lens

ORDER CODE	DESCRIPTION
FRS/23/4K/WH	FRISTON 23W 4254LM 4K FINISHED WHITE


OPTIONS	DESCRIPTION
/WH	RAL9016 WHITE POWDER COATED BODY
/PCV	PRODUCT COLOUR VARIATION
/DALI	DALI/SWITCH DIMMABLE
/ISC	INDEPENDENT SWITCHED CIRCUITS

\*Suffix WH to RAL for colour change -

Add ISC to end of code for independent switched circuits,

Friston's lumen output can be change on request\*

## DIMENSIONS

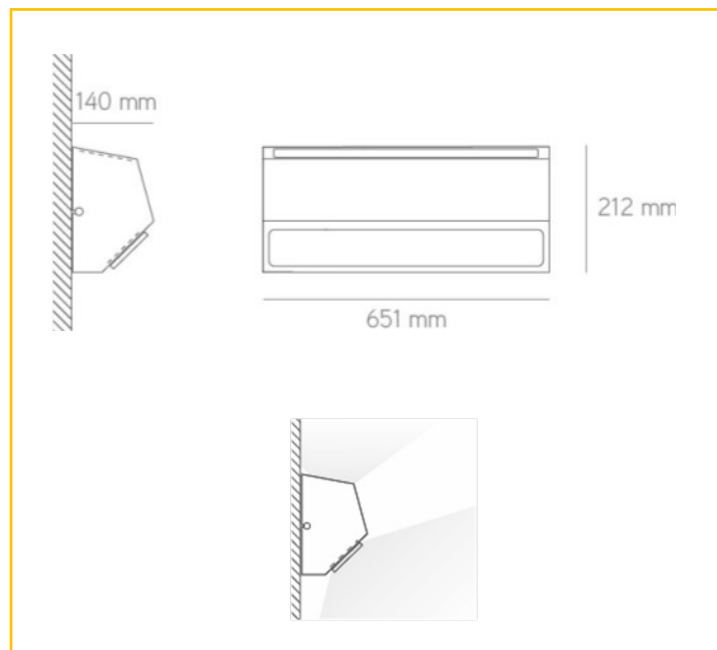

Ordering Format: Product Code / Option

Example: FRS/23/4K/WH/DALI



# Lancing



## APPLICATIONS

- Toilets
- Corridors
- Store rooms
- Bedrooms

## CONSTRUCTION

- Spun Steel base
- Opal Lumaxx polycarbonate diffuser
- Epoxy powder coated white


## TECHNICAL DETAILS

- CRI>80
- 2 CCT 3000K, 4000K
- Various Wattages

PRODUCT CODE	DESCRIPTION
LA/20/CCT/OP/WH	LANCING 20W, 1680LM, WHITE BASE, OPAL DIF
LA/25/CCT/OP/WH	LANCING 25W, 2460LM, WHITE BASE, OPAL DIF

OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/PCV	PRODUCT COLOUR VARIATION

## DIMENSIONS

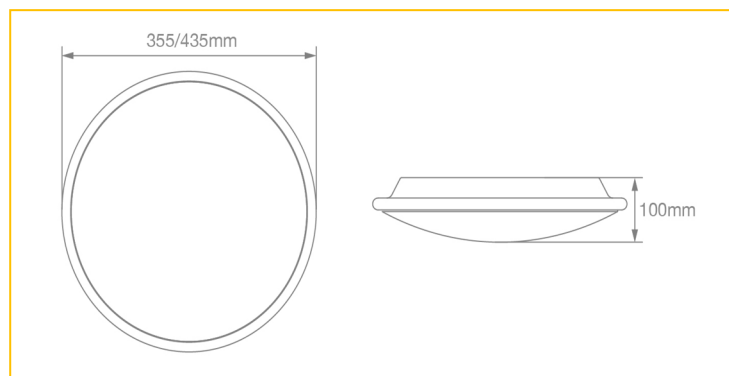

Ordering Format: Product Code / Option

Example: LA/20/CCT/OP/WH/DALI



# Leah



## APPLICATIONS

- Toilets
- Corridors
- Bedrooms
- Stores

## CONSTRUCTION

- Polycarbonate body
- Opal homogenous diffuser
- Steel powder coated bezel


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K

ORDER CODE	DESCRIPTION
LEA/1500/40/WH/WST	LEAH, 13W, 4K, WHITE TRIM, 1375LM
LEA/2000/40/WH/WST	LEAH, 16W, 4K, WHITE TRIM, 2025LM
LEA/2700/40/WH/WST	LEAH, 20W, 4K, WHITE TRIM, 2750LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	DALI MONITORED EMG
/MW1	MICROWAVE SENSOR
/PCV	PRODUCT COLOUR VARIATION

## DIMENSIONS

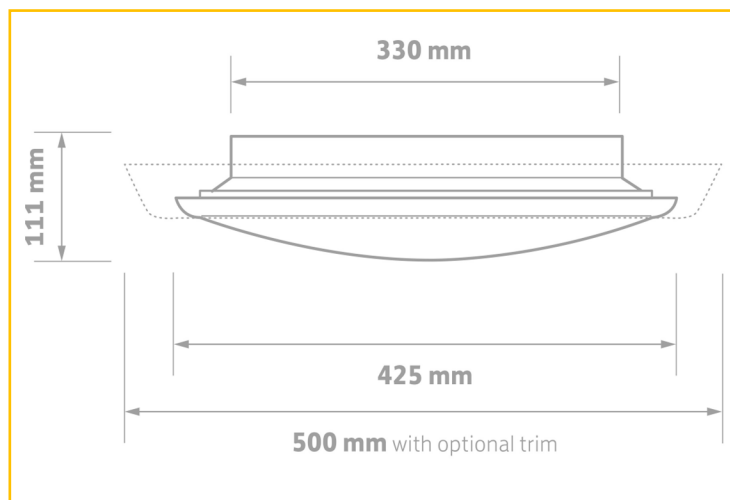

Ordering Format: Product Code / Option

Example: LEA/1500/40/WH/WST/M3





# Ribble 'S'



## APPLICATIONS

- Reception
- Atrium
- Canteens
- Core Areas


## CONSTRUCTION

- Fabricated steel body epoxy powder coated white RAL9003 as standard
- Opal PMMA diffuser
- Body colour options WH, BK, SL, RAL

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K & TW
- Suspension kit 1.5 mtr as standard

## DIMENSIONS

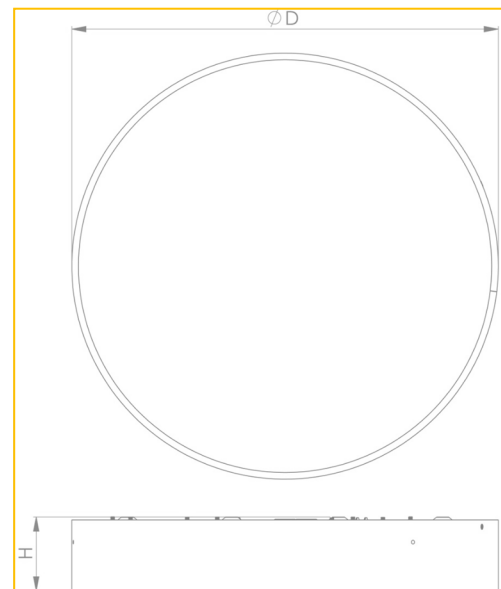

D = 300/450/600 H = 77mm

D = 900mm H = 87mm

PRODUCT CODE	DESCRIPTION
RIS/18/4K/WH/OP	RIBBLE, 18W, 4K, 300MM, OPAL, 2,540lm
RIS/21/4K/WH/OP	RIBBLE, 21W, 4K, 300MM, OPAL, 2,851lm
RIS/31/4K/WH/OP	RIBBLE, 31W, 4K, 450MM, OPAL, 4,011lm
RIS/36/4K/WH/OP	RIBBLE, 36W, 4K, 450MM, OPAL, 4,806lm
RIS/45/4K/WH/OP	RIBBLE, 45W, 4K, 600MM, OPAL, 7,385lm
RIS/52/4K/WH/OP	RIBBLE, 52W, 4K, 600MM, OPAL, 8,604lm
RIS/69/4K/WH/OP	RIBBLE, 69W, 4K, 900MM, OPAL, 11,480lm
RIS/80/4K/WH/OP	RIBBLE, 80W, 4K, 900MM, OPAL, 13,132lm

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/MPO	Micro-prism diffuser UGR<19
/BTC	Casambi wireless control

Ordering Format: Product Code / Option

Example: RIS/36/4K/WH/DALI

IP40



# Salus (Anti - Ligature)



## APPLICATIONS

- Mental health units
- Hospitals
- Prison cells
- High risk areas

## CONSTRUCTION

- 1.2mm Spun steel base
- Opal TP(a) polycarbonate diffuser
- Epoxy powder coated
- Security fixings


## TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Various wattages
- IK10 to impact test BSEN 2262

PRODUCT CODE	DESCRIPTION
SA/17/4K/OP/WH	SALUS 17W 2060LM 4000K WHITE BODY
SA/27/4K/OP/WH	SALUS 27W 2970LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL
/MW1	MICROWAVE SENSOR
/DMW	DIMMABLE MICROWAVE SENSOR

## DIMENSIONS

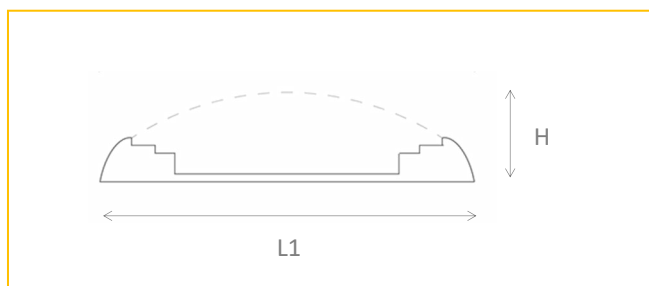

17w L1 - 455mm H - 118mm

27w L1 - 455mm H - 118mm

Ordering Format: Product Code / Option

Example: SA/17/4K/OP/WH/DALI



# Scholar



## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION

- Fabricated sheet metal epoxy powder Coated white
- Polycarbonate diffuser
- Polycarbonate captive end caps

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- European Driver
- Epistar Chip Set

PRODUCT CODE	DESCRIPTION
SCH/40/4K/WH	SCHOLAR 1200MM, 40W, 4K, WHITE
SCH/50/4K/WH	SCHOLAR 1500MM, 50W, 4K, WHITE

## DIMENSIONS



OPTIONS	DESCRIPTION
/DALI	DALI/TOUCH DIM
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/PIR	ON/OFF PIR SENSOR POD
/DPIR	PROGRAMMABLE PIR POD


## IMAGES



Ordering Format: Product Code / Option

Example: BRN/16/4K/WH/M3



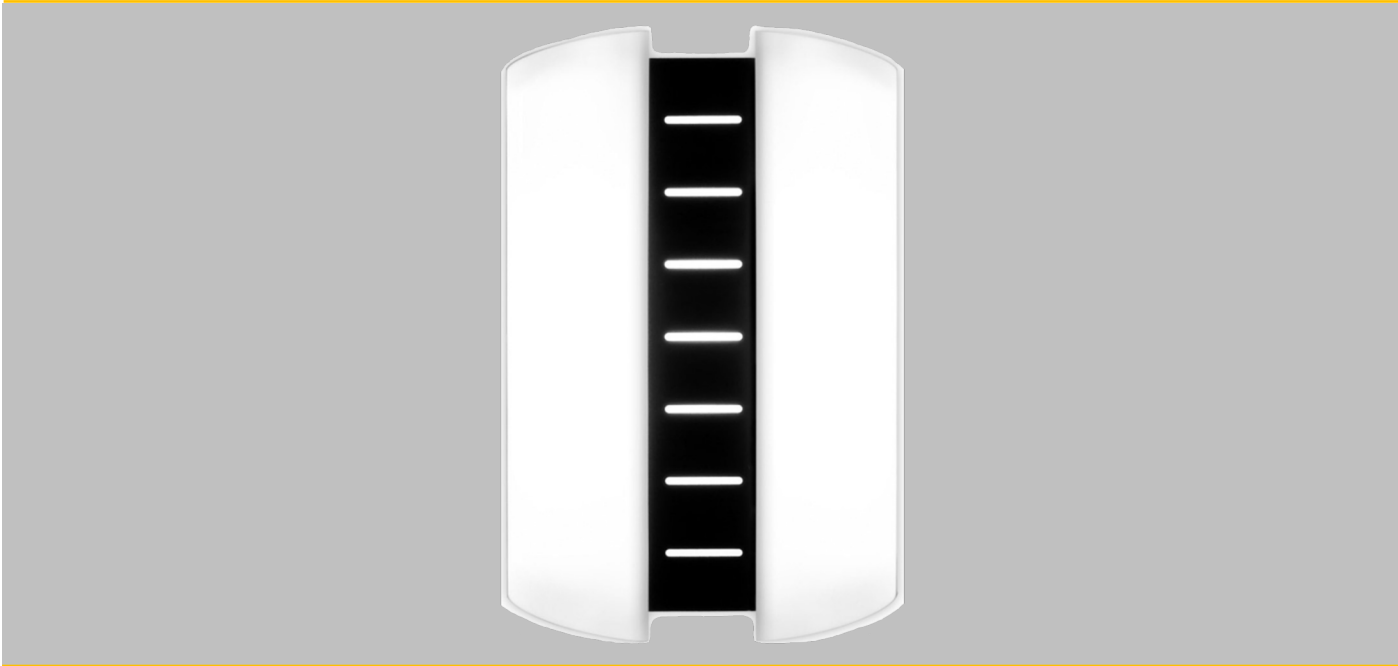

### APPLICATIONS

- Receptions
- Boardrooms
- Corridors

### CONSTRUCTION

- Steel fabricated frame work
- Extruded acrylic diffuser
- Epoxy powder coated


### TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K
- Various Wattages

PRODUCT CODE	DESCRIPTION
SEL/10/4K/OP/BK	SELSEY 10W 1420LM 4000K BLACK FASCIA
SEL/15/4K/OP/BK	SELSEY 15W 1950LM 4000K BLACK FASCIA

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/PCV	PRODUCT COLOUR VARIATION
/D3	3HR DALI MONITORED EMERGENCY

### DIMENSIONS

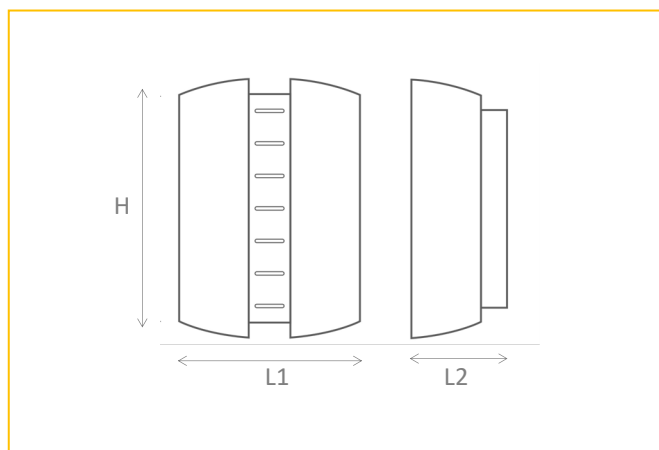

10w L1 - 240mm L2 - 140mm - H 350mm

15w L1 - 240mm L2 - 140mm - H 350mm

Ordering Format: Product Code / Option

Example: SEL/10/4K/OP/BK/DALI



# Solar



## APPLICATIONS

- Mental health units
- Hospitals
- Schools
- Industrial

## CONSTRUCTION

- TP(a) polycarbonate base
- Opal TP(a) polycarbonate diffuser
- Polycarbonate white bezel


## TECHNICAL DETAILS

- CRI>80
- IK 10 Rated impact tested to BSEN2262
- CCT 3000K, 4000K
- Various Wattages

PRODUCT CODE	DESCRIPTION
SOL/17/4K/OP/WH	SOLAR 17W 2060LM 4000K WHITE BODY
SOL/27/4K/OP/WH	SOLAR 27W 2970LM 4000K WHITE BODY

OPTIOmNS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/MW1	MICROWAVE SENSOR
/DMW	DIMMABLE MICROWAVE SENSOR
/ATF	ANTI-TAMPER FIXINGS

## DIMENSIONS

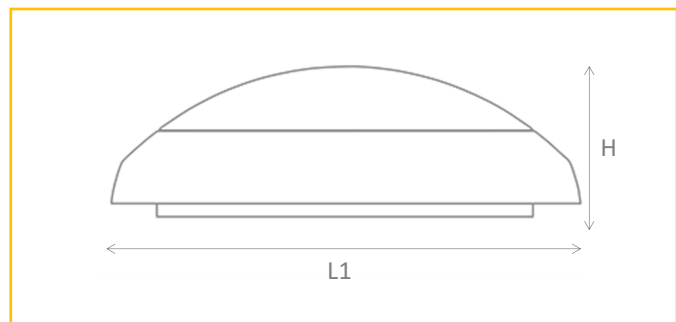

17w L1 - 380mm H - 215mm

27w L1 - 380mm H - 215mm

Ordering Format: Product Code / Option

Example: SOL/17/4K/OP/WH/DALI



# SP60 Sport



## APPLICATIONS

- Industrial
- Sports Halls
- Distribution Centre

## CONSTRUCTION

- Aluminium extruded body
- Epoxy powder coated finish

## TECHNICAL DETAILS

- CRI >80
- Suspended or Surface mounted
- Samsung / Tridonic Chip set
- 4000K
- IK10

PRODUCT CODE	DESCRIPTION
SP60/58/4K/WH/L**	SP60 58W, 4K, 10,031LM, 60°, 935MM
SP60/86/4K/WH/L**	SP60 86W, 4K, 14,969LM, 60°, 1190MM
SP60/122/4K/WH/L**	SP60 58W, 4K, 20,355LM, 60°, 1190MM
SP60/114/4K/WH/L**	SP60 114W, 4K, 19,959LM, 60°, 1444MM
SP60/151/4K/WH/L**	SP60 151W, 4K, 25,315LM, 60°, 1444MM
SP60/171/4K/WH/L**	SP60 171W, 4K, 29,784LM, 60°, 1953MM
SP60/207/4K/WH/L**	SP60 207W, 4K, 35,302LM, 60°, 1953MM

OPTICS	DESCRIPTION
/L40	40 x 40° beam angle
/L30x65	30 x 65° beam angle
/L60	60 x 60° beam angle
/75	75 x 75° beam angle
/90	90 x 90° beam angle


OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/HBAIR	Master Sensor up to 16mtr BLE programmable
/BTC	Wireless Bluetooth control

Ordering Format: Product Code / Option


Example: SP60/86/4K/WH/L60/DALI

\*Suffix end of ordering code with required beam angle\*

## DIMENSIONS

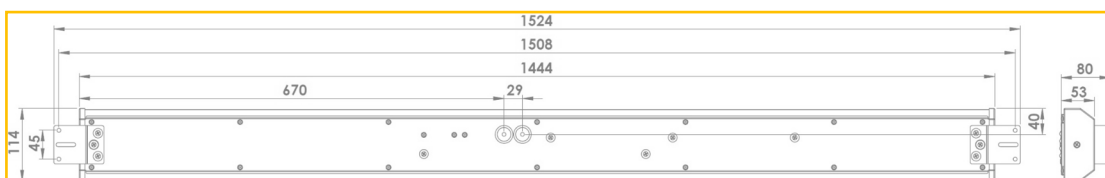

# Sports Star

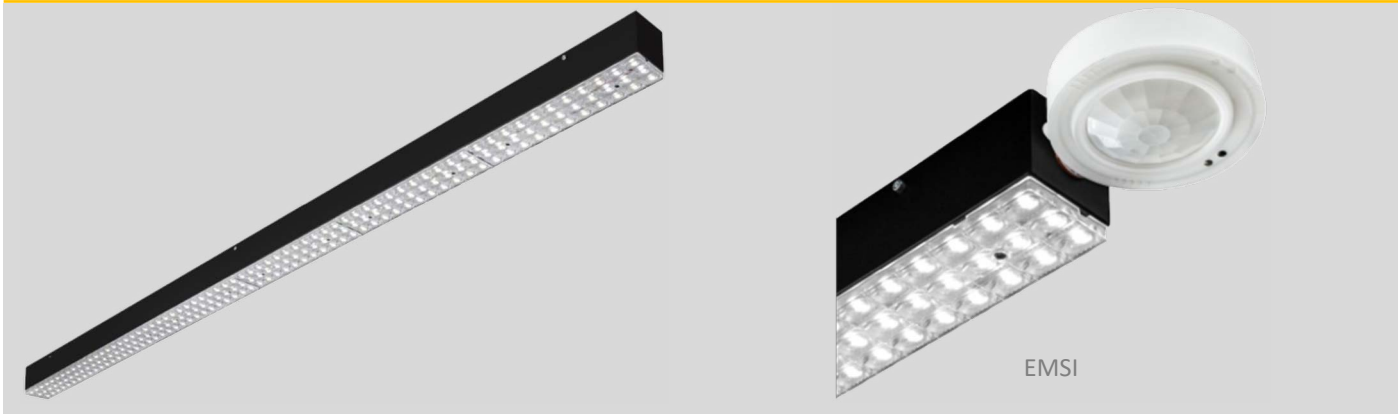

## TECHNICAL DETAILS

- Motion sensor and daylight harvesting option (/EAO)
- Suspended, surface or BESA mount fixing
- Wireless mesh and wireless control option (/BTC)
- Ledil 85°+ 35°PMMA oval lens
- Dimmable option (/BTC)
- Long life 65,000h L70/B50

## APPLICATIONS

- Industrial
- Distribution Centre
- Sports Halls
- Retail

## CONSTRUCTION

- Steel fabricated body
- Epoxy powder coated finish

PRODUCT CODE	DESCRIPTION
SS/56/4K/**	SPORTS STAR 56W 8025LM 4000K BLACK BODY
SS/87/4K/**	SPORTS STAR 87W 11825LM 4000K BLACK BODY

\*Suffix end of code with beam angle required\*

OPTIONS	DESCRIPTION
/MB	MEDIUM BEAM ANGLE 34°
/WB	WIDE BEAM ANGLE 92°
/M3	3HR EMERGENCY
/MTC	MASTER CONNECT WIRELESS CONTROL (DIM)

## ACCESSORIES



### MOBILE FIELD APP

Available from  
Google play Store



### EAWS001


Master Connect  
Switch



### EAO


EasyAir Occu-DL  
Sensor

## DIMENSIONS

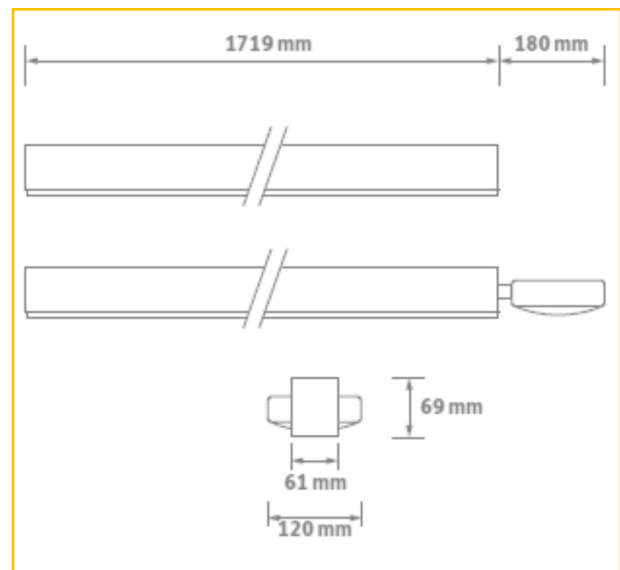



# Stamford

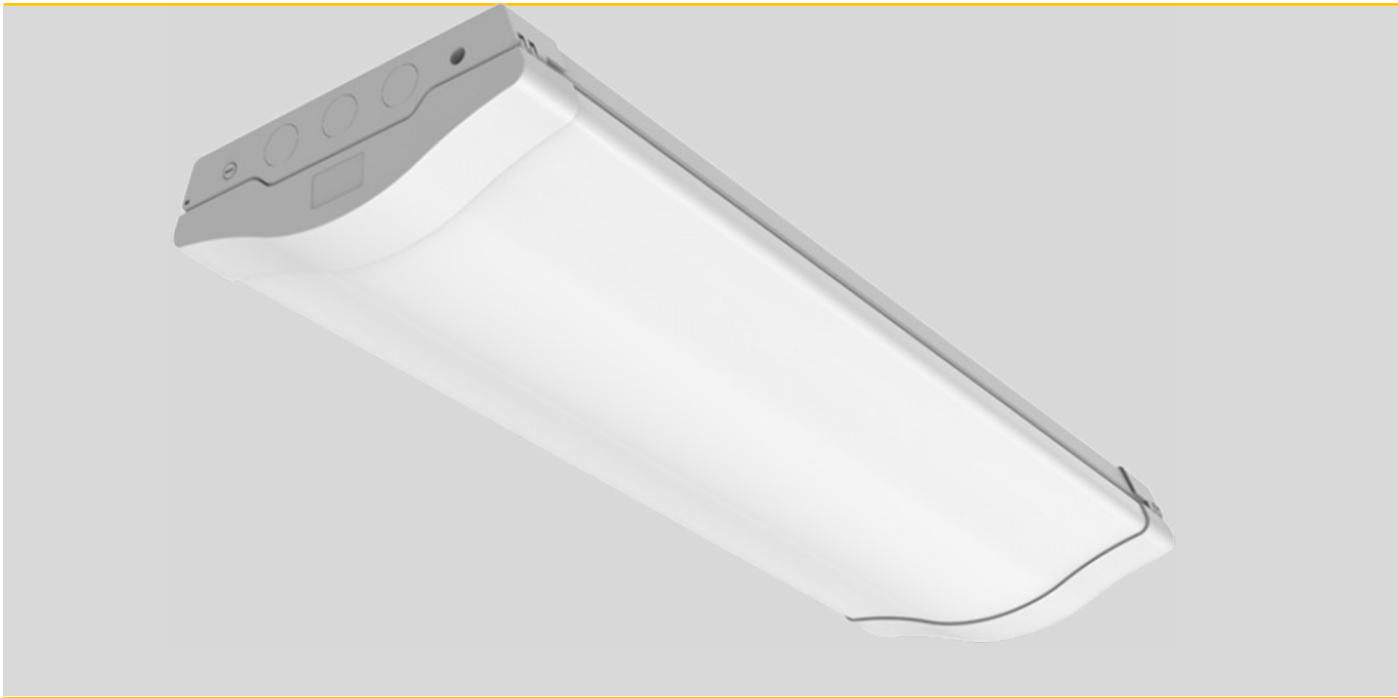

## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION


- Fabricated sheet metal base epoxy powder Coated white
- Hinged Polycarbonate diffuser
- Polycarbonate captive end caps

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Tridonic Driver
- Epistar LED's L70 B10 - 50,000hrs

PRODUCT CODE	DESCRIPTION
STM/27/4K/WH	STAMFORD 27W 3,500LM 4K OPAL
STM/50/4K/WH	STAMFORD 50W 6,500LM 4K OPAL

## DIMENSIONS

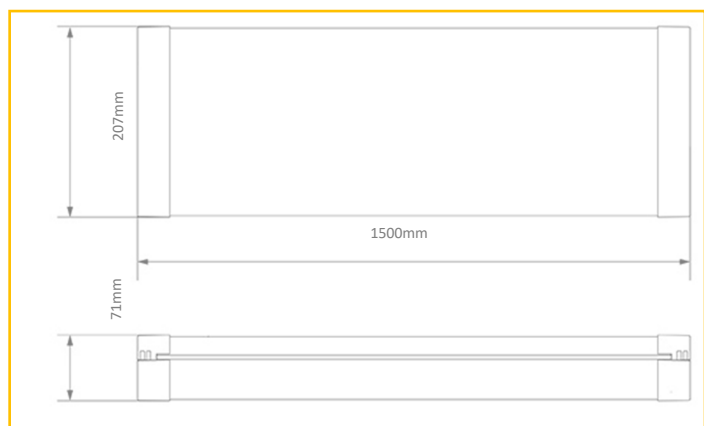


OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option  
 Example: STM/27/4K/WH/DALI



# Toledo

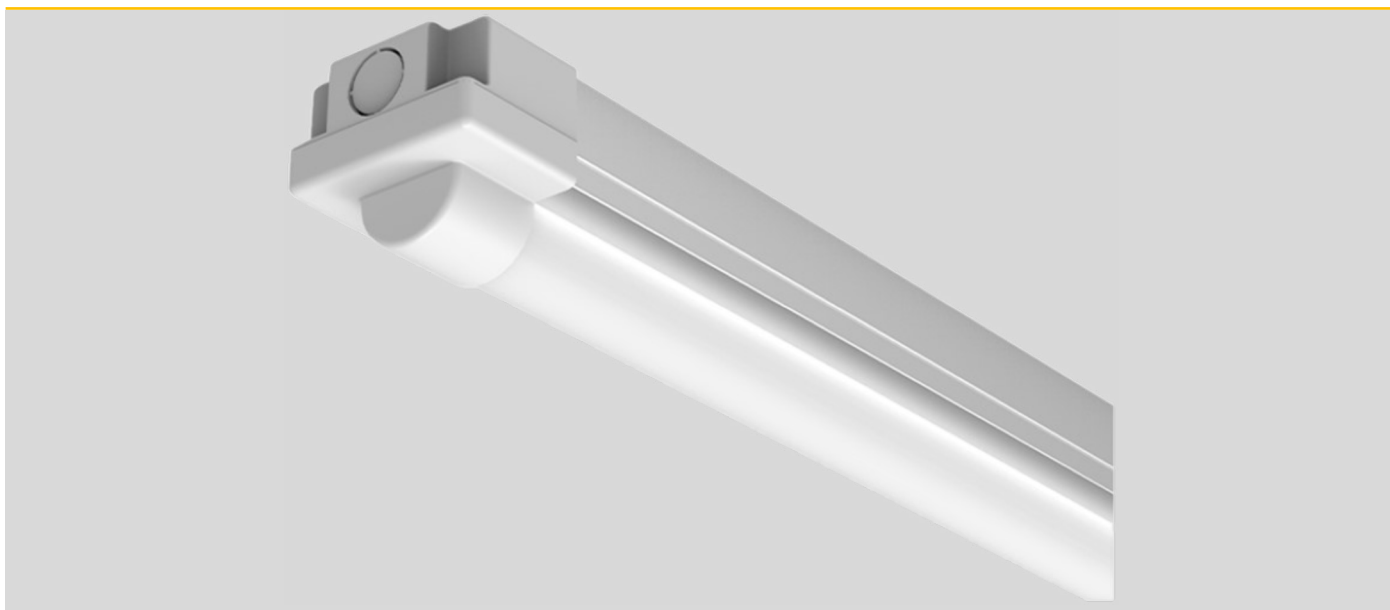

## APPLICATIONS

- Activity Halls
- Factories
- Stores
- Workshops

## CONSTRUCTION

- Polycarbonate body with steel gear tray
- Polycarbonate opal diffuser
- Polycarbonate captive end caps


## TECHNICAL DETAILS

- CRI>80
- Tridonic Driver
- Samsung chip set SDM 3
- 100lm + per watt

PRODUCT CODE	DESCRIPTION
TL/25/4K/OP/WH	TOLEDO 25W 2,700LM 4000K
TL/32/4K/OP/WH	TOLEDO 32W 3,200LM 4000K
TL/47/4K/OP/WH	TOLEDO 47W 4,900LM 4000K
TL/60/4K/OP/WH	TOLEDO 60W 6,000LM 4000K

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/PIR	ON/OFF PIR SENSOR POD
/DPIR	DALI ADDRESSABLE PIR POD

## DIMENSIONS

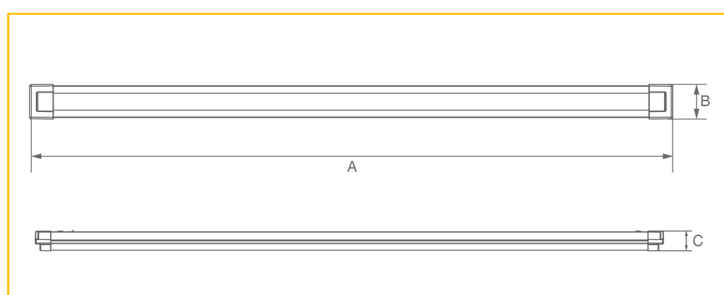

25w/47w A - 1218mm B - 65mm C - 57mm

32w/60w A - 1518mm B - 65mm C - 57mm


Ordering Format: Product Code / Option

Example: TL/25/4K/OP/WH/DALI

IP20



# Torino

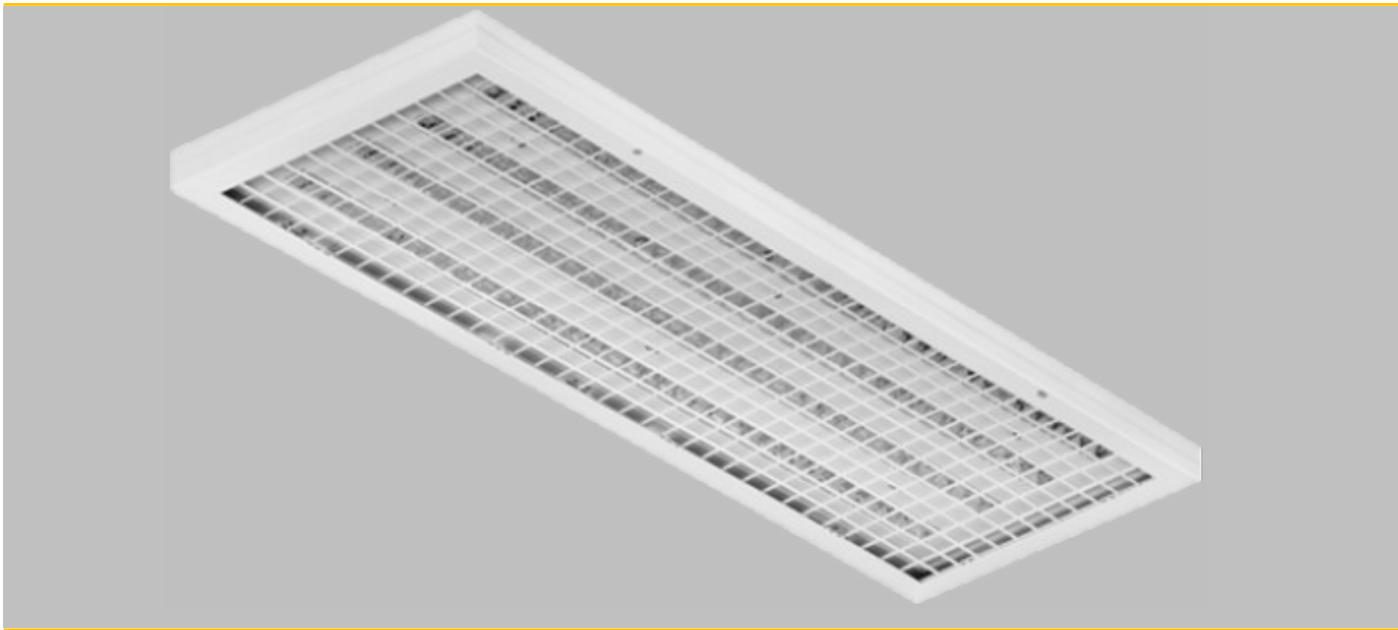

## APPLICATIONS

- Industrial
- Sports Halls
- Distribution Centre
- Gymnasium

## CONSTRUCTION


- Steel fabricated body
- Epoxy powder coated finish

## TECHNICAL DETAILS

- CRI >80
- Dual Driver
- 4000K
- IK10
- Suspended or Surface mounted
- Samsung Chip set
- Long life 52,000h L90/B10

PRODUCT CODE	DESCRIPTION
TRO/50/4K/WH	TORINO 50W 6150LM 4000K
TRO/100/4K/WH	TORINO 100W 12300LM 4000K
TRO/145/4K/WH	TORINO 145W 19500LM 4000K

## DIMENSIONS

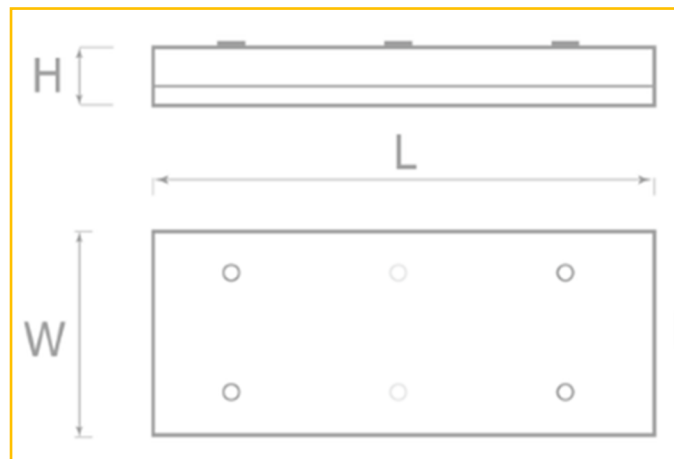

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/DS	DUAL SWITCH CIRCUITS


Ordering Format: Product Code / Option  
Example: TRO/50/4K/WH/DALI

(50w) L - 1226mm x W - 286mm x H 65mm  
(100/150w)L - 1226mm x W - 486mm x H 65mm

IP20



# Tubo

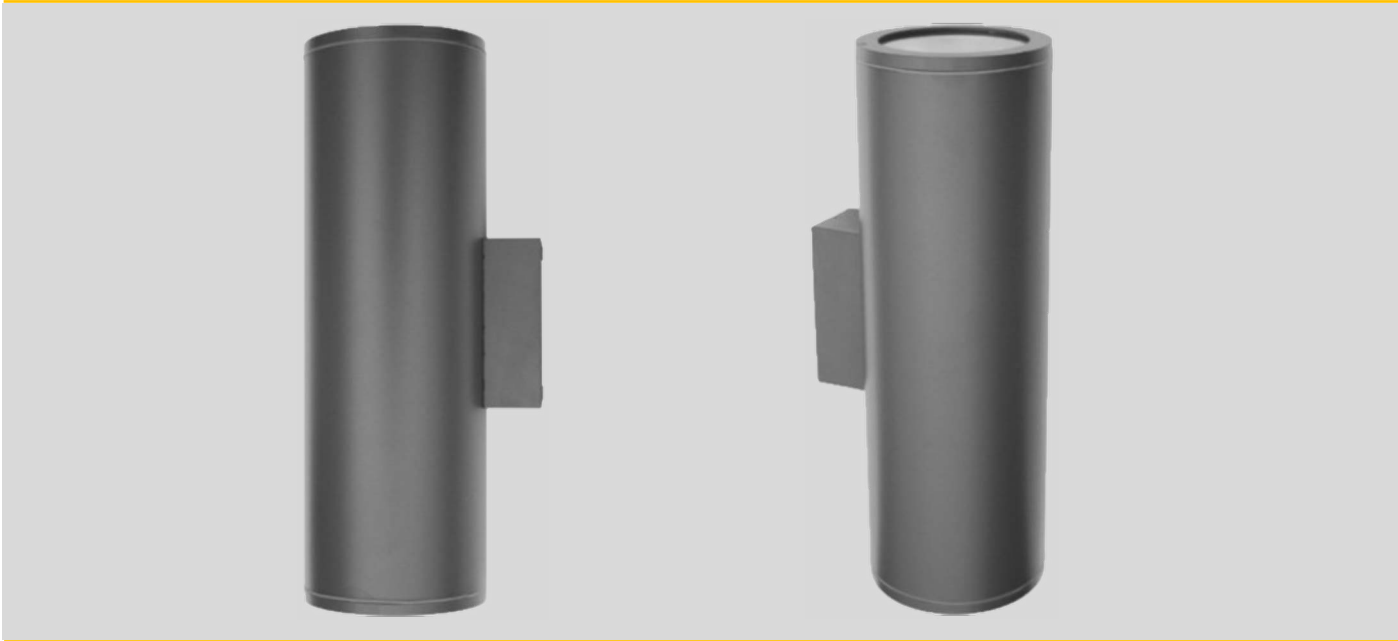

## APPLICATIONS

- Corridors
- Facias
- Entrance Lobby
- Atrium

## CONSTRUCTION

- Extruded Aluminium
- Tempered glass diffuser
- Epoxy powder coated finish RAL7043


## TECHNICAL DETAILS

- CRI >80 - IP65 - IK08
- Wall mounted
- Samsung Chip set
- 3000K, 4000K
- Long life 50,000h L70/B50

PRODUCT CODE	DESCRIPTION
TU/19/4K/30D/UD	TUBO, 19W, 2,150LM, 4K, UP/DOWN
TU/26/4K/30D/UD	TUBO, 26W, 2,901LM, 4K, UP/DOWN
TU/38/4K/30D/UD	TUBO, 38W, 4026LM, 4K, UP/DOWN

OPTIONS	DESCRIPTION
/PCV	PRODUCT COLOUR VARIATION
/60D	2 x 60° BEAM ANGLE
/45D	2 x 45° BEAM ANGLE

## DIMENSIONS

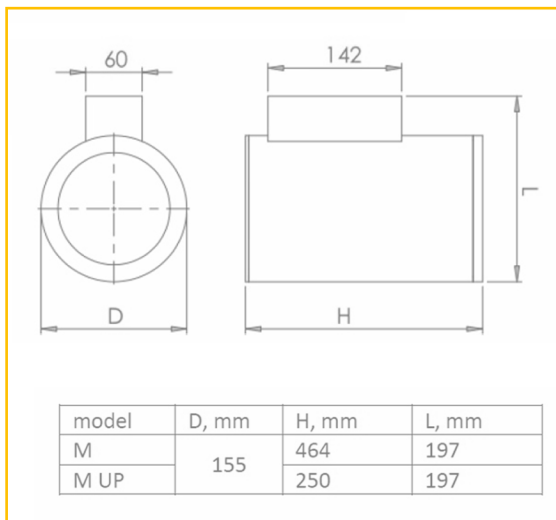

\*\*Suffix 4K (4000K) to 3K (3000K) LED Suffix 30D to beam angle required\*\*



# Ventnor



## APPLICATIONS

- Stores
- Car parks
- Food / Clean areas
- Warehouses
- Factories

## CONSTRUCTION

- Extruded PMMA body
- Stainless Steel clips
- Opal diffuser
- IK10 rated impact test to BSEN 2262

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 4000K
- Tridonic/Helvar Driver

## DIMENSIONS

ORDER CODE	DESCRIPTION
VN/15/4K/65/OP	VENTNOR, 15W, 4K, 2,268LM, 662MM
VN/18/4K/65/OP	VENTNOR, 18W, 4K, 2,674LM, 662MM
VN/26/4K/65/OP	VENTNOR, 26W, 4K, 3,742LM, 1275MM
VN/36/4K/65/OP	VENTNOR, 36W, 4K, 5,348LM, 1275MM
VN/31/4K/65/OP	VENTNOR, 31W, 4K, 4,676LM, 1575MM
VN/45/4K/65/OP	VENTNOR, 45W, 4K, 6,685LM, 1575MM
VN/59/4K/65/OP	VENTNOR, 59W, 4K, 8,666LM, 1575MM

L, mm	W, mm	H, mm	D, mm	h, mm
662	96	111	350	100
	146			
1272	96		700	
	146			
1572	96		940	
	146			

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/PIR	MOTION SENSOR
/MW1	MICROWAVE SENSOR
/DMW	DALI MICROWAVE SENSOR

Ordering Format: Product Code / Option  
 Example: VN/15/4K/65/OP/DALI



# Yeovil



## APPLICATIONS

- Car Parks
- Sports Halls
- Walk ways
- Canopy

## CONSTRUCTION

- FR ABS moulded Housing
- Opal polycarbonate diffuser
- Tool-less entry clips


## TECHNICAL DETAILS

- CRI>80
- CCT 4000K

## DIMENSIONS

PRODUCT CODE	DESCRIPTION
YE/20/4K/OP/WH	YEOVIL 22W 1800LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/DMW	DALI MICROWAVE SENSOR
/MW1	MICROWAVE SENSOR

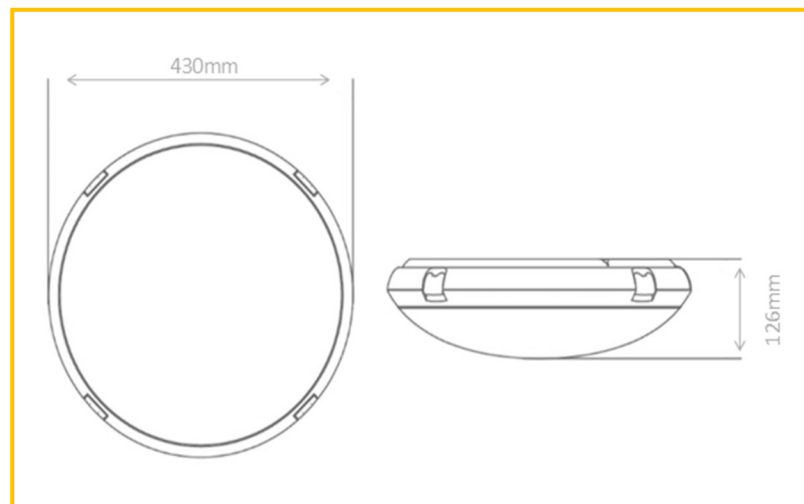


Ordering Format: Product Code / Option

Example: YE/20/4K/OP/WH/DALI



# Suspended

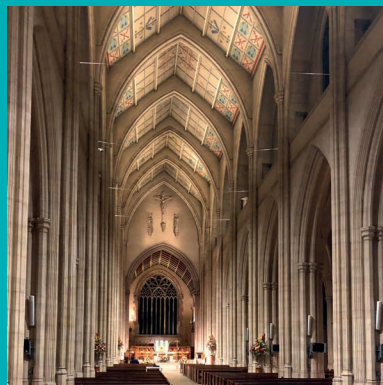

Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal



# Bude



## APPLICATIONS

- Coffee shops
- Breakout
- meeting rooms

## CONSTRUCTION

- Hand spun aluminium shade with Colour coordinated ceiling cup
- Epoxy powder coating finish


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 2200K, 2700K
- Colour body option RD, BK, SG

## DIMENSIONS

ORDER CODE	DESCRIPTION
BD/6/WD/*	BUDE 6W 370LM WARM DIM E27
BD/7.7/FO/*	BUDE 7.5W 500LM 2700K FIXED OUTPUT E27

OPTIONS	DESCRIPTION
/B	BLACK SATIN OUTER, WHITE SATIN INNER
/R	RED SATIN OUTER, WHITE SATIN INNER
/G	GREY SATIN OUTER, WHITE SATIN INNER
/RC	RED BRAIDED CABLE
/PCV	PRODUCT COLOUR VARIATION

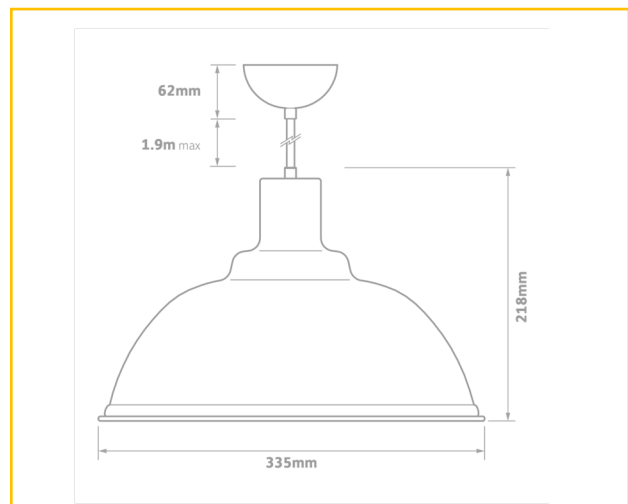

\* Suffix end of code with required colour of shade\*

Ordering Format: Product Code / Option

Example: BD/6/WD/B





## APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

## CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard
- Polar micro-prism diffuser
- Direct/Indirect illumination 60/40

## TECHNICAL

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Body colour options WH, BK, SG

PRODUCT CODE	DESCRIPTION
FZ/26/4K/WS/WH	FRAZER, 26W,3997LM, 1215MM LONG
FZ/38/4K/WS/WH	FRAZER, 38W,5447LM, 1215MM LONG
FZ/34/4K/WS/WH	FRAZER, 34W, 5114LM, 1496MM LONG
FZ/48/4K/WS/WH	FRAZER, 48W, 6968LM, 1496MM LONG

## DIMENSIONS

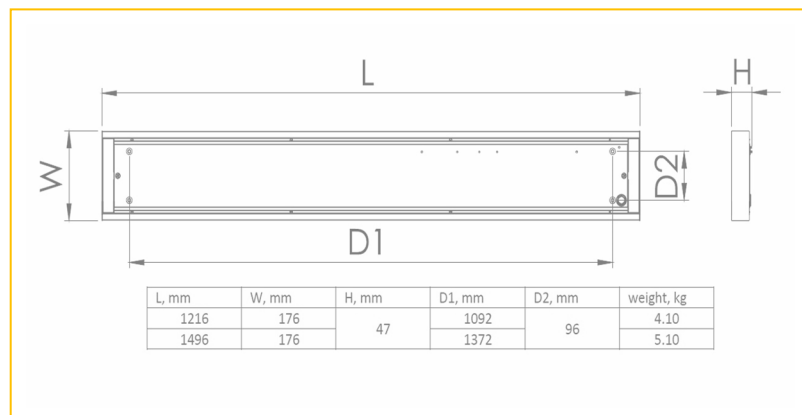

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL (DIM)
/ECO	SWITCH DIM CONTROL


\*\*Suffix /WH to body colour required\*\*

Ordering Format: Product Code / Option

Example: FZ/26/4K/WS/WH/DALI



# HEXx

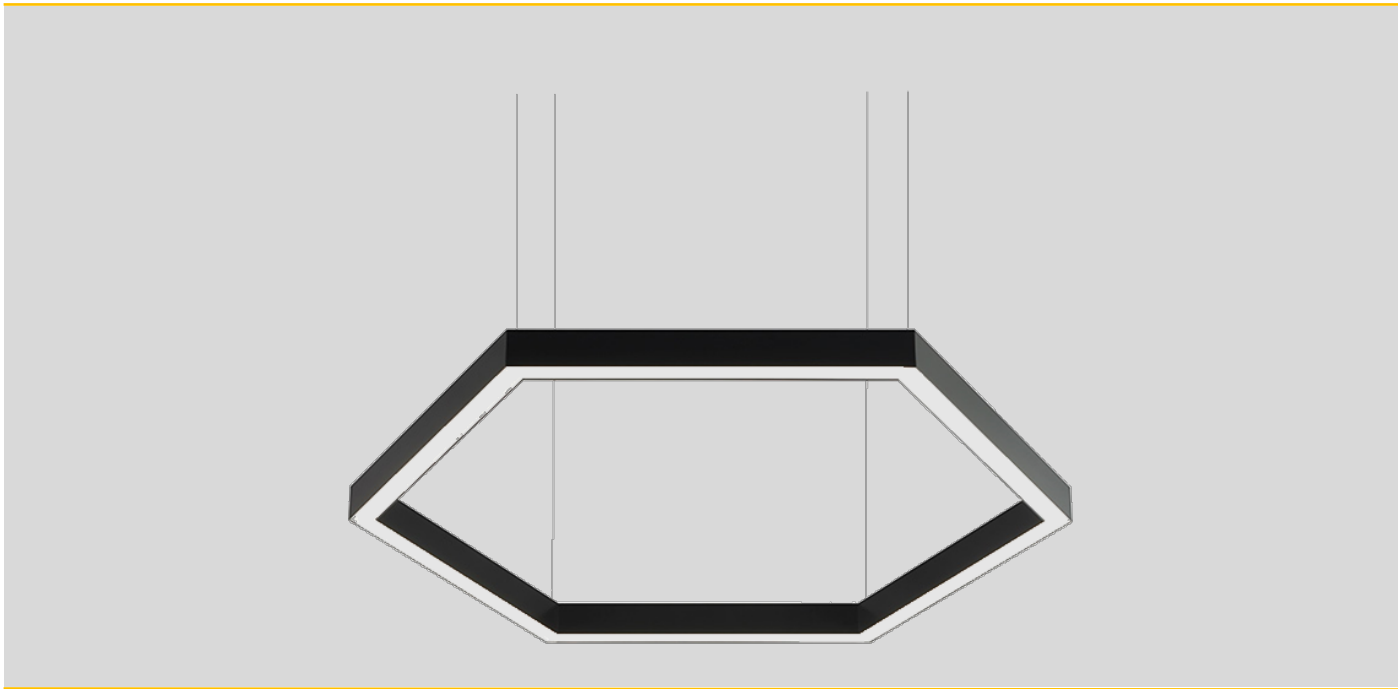


HEXx is available as a fully customisable products with direct or direct/indirect light opal or micro-prism diffuser  
Various RAL colour options, all sizes can be produced please consult our sales team with you size requirement.


## TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- Control options - DALI, Wireless
- Optic options
- Direct Or Direct/Indirect


## PAINT COLOUR



RAL9010



RAL9016



RAL9006



RAL9005



ALL RAL

## OPTICS



OPAL



MICRO-PRISM



DIFFUSED MICRO-PRISM



# Lina 40 & 60



## CUSTOMISED EXAMPLES



Lina 40 & 60 are available as a fully customisable products from a single stand alone units to continuous lines of light with Intersections, Tee's, elbows. Lina has the option of optics, paint colours and lumen outputs and is available suspended or surface mounted the product has untold capabilities.


### TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- Control options - DALI, Wireless
- Optic options
- Direct Or Direct/Indirect
- Through wiring


### APPLICATIONS

- Classrooms
- Corridors
- Receptions
- Offices
- meeting rooms
- Atrium


### PAINT COLOUR

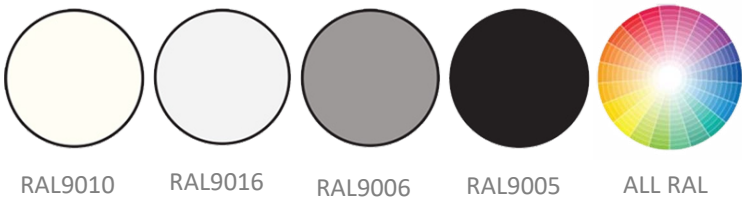


### OPTICS

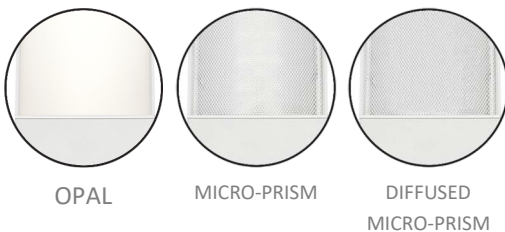

### INTERSECTIONS

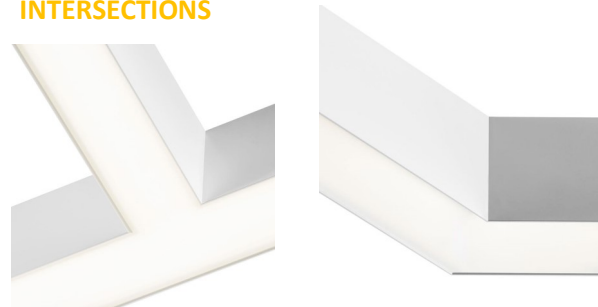

### DIMENSIONS

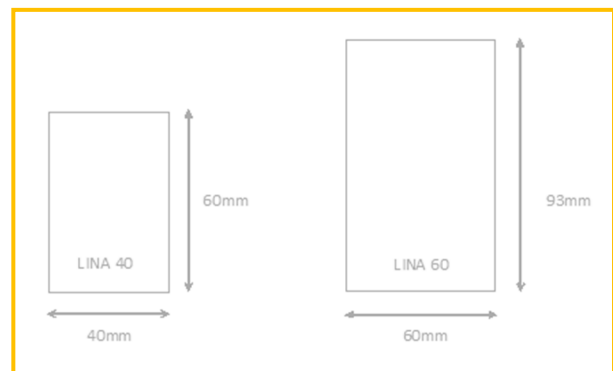

### ORDERING INFORMATION


Please contact our Sales Office with your project enquiry, as Lina is quoted on a project basis



# Lina 80



## CUSTOMISED EXAMPLES

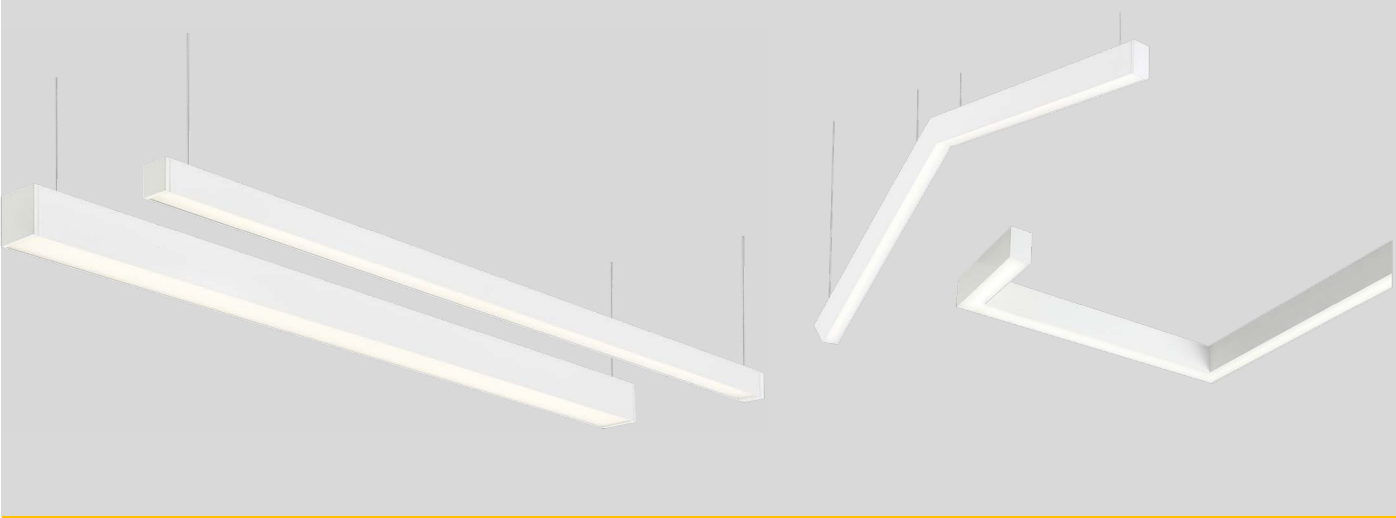

Lina 80 is available as a fully customisable products from a single stand alone units to continuous lines of light with Intersections, Tee's, elbows. Lina has the option of optics, paint colours and lumen outputs and is available suspended or surface mounted the product has untold capabilities.


## TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- Control options - DALI, Wireless
- Optic options
- Direct Or Direct/Indirect
- Through wiring

## APPLICATIONS

- Classrooms
- Corridors
- Receptions
- Offices
- meeting rooms
- Atrium


## PAINT COLOUR

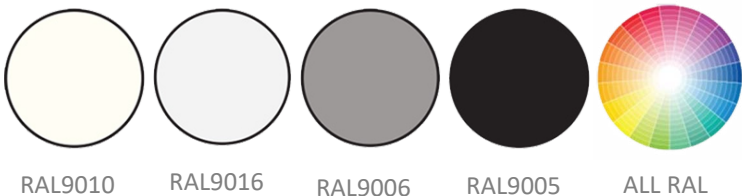


## INTERSECTIONS



## OPTICS

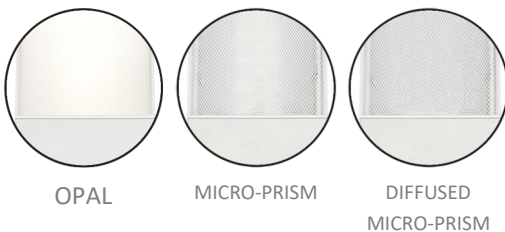

## DIMENSIONS

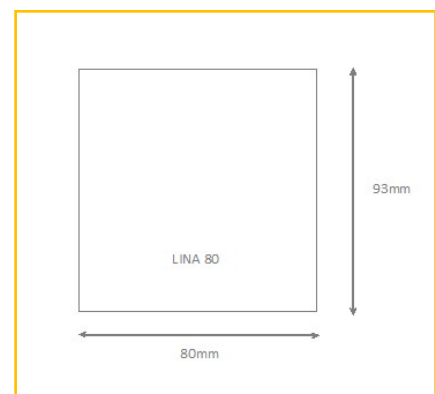


## ORDERING INFORMATION

Please contact our Sales Office with your project enquiry, as Lina 80 is quoted on a project basis



# Luma-Cell

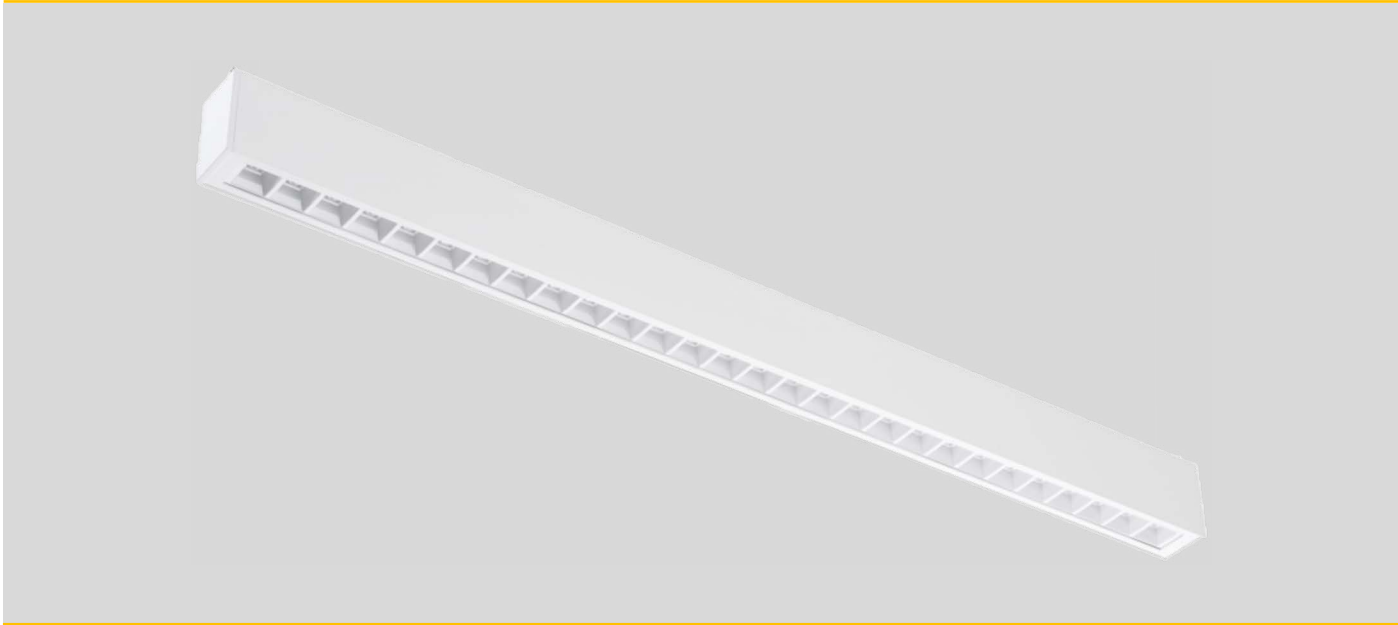

## APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

## CONSTRUCTION

- Extruded aluminium body epoxy powder coated RAL 9010 & 9005 as standard
- Aluminium end plates
- LEDIL Optic

## TECHNICAL DETAILS


- CRI>80
- Low UGR
- Various Wattages
- Efficiency up to 145lm/W
- CCT Options 3000K, 4000K
- Tridonic LED's

PRODUCT CODE	DESCRIPTION
LC/6/4K/WW	LUMA-CELL 634MM WHITE BODY WHITE CELL
LC/12/4K/WW	LUMA-CELL 1170MM WHITE BODY WHITE CELL


OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING / TOUCH DIM
/M3	3HR MAINTAINED EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/WW	WHITE BODY, WHITE CELLS
/WB	WHITE BODY, BLACK CELLS
/BB	BLACK BODY, BLACK CELLS
/BW	BLACK BODY, WHITE CELLS

\*\* Suffix product code according to requirements \*\*

## DIMENSIONS

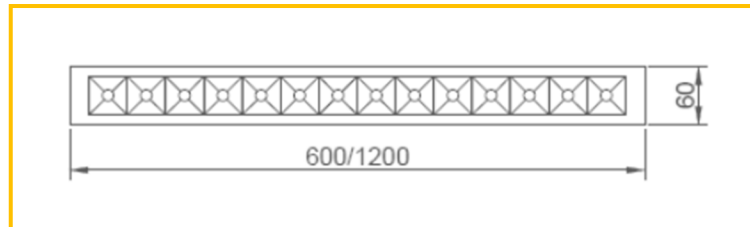

# Lustre DI

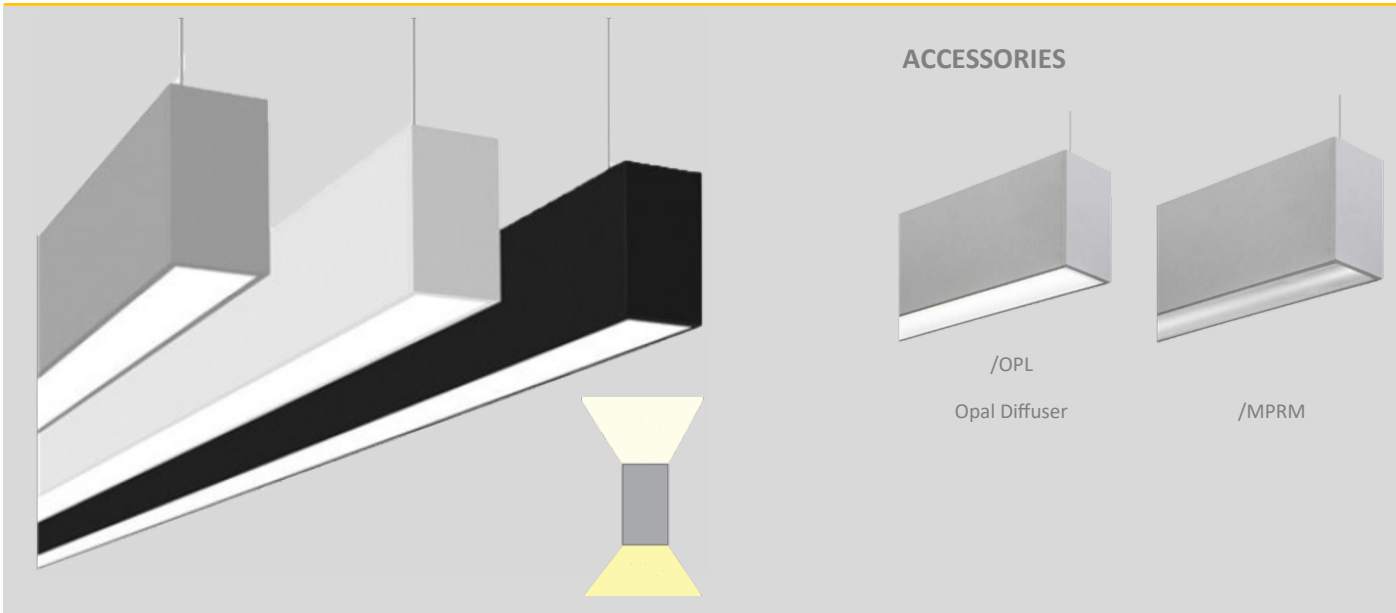

## APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

## CONSTRUCTION

- Extruded aluminium body epoxy Powder coated RAL 9016 White as standard
- Aluminium flat end caps


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Samsung 561B+ LED's
- Direct/Indirect Distribution

PRODUCT CODE	COLOUR TEMP(K)	LUMENS (LM)	BODY LENGTH
LDI/850/4K/WH	4000K	2350	850MM
LDI/1200/4K/WH	4000K	3525	1200MM
LDI/1500/4K/WH	4000K	4550	1500MM
LDI/2500/4K/WH	4000K	7050	2500MM

\* Note STD (LM) quoted but other option available using NFC Technology \*

## DIMENSIONS

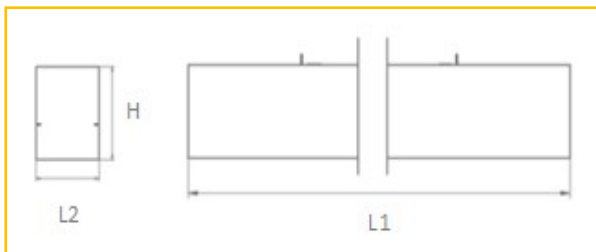

L1 - 850mm,1200mm, 1500mm, 2500mm

L2 - 62mm x H - 109mm

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING / TOUCH DIM
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/GR	GREY BODY
/BK	BLACK BODY
/SEB	RIGHT ANGLE 90°ELBOW
/STG	TEE JUNCTION
/MPRM	MICRO-PRISM FOR LG7 COMPLIANCE
/SE	FLAT ALUMINIUM END CAPS

## CONTINUOUS MOUNTING



LDI/850/4K/WH/SE

Start/End piece

LDI/850/4K/WH/INT

Intermediate piece

LDI/850/4K/WH/SE


Start/End piece

\*\*\*Suffix code with SE for start/End piece\*\*\*





# Lustre 'S'

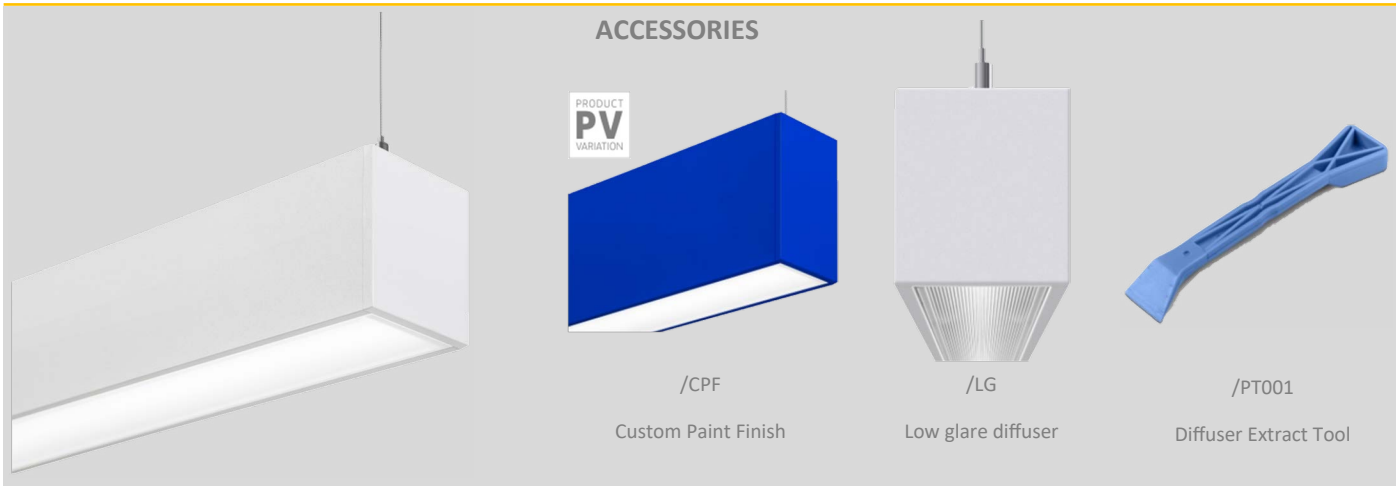

## APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

## CONSTRUCTION

- Extruded aluminium body epoxy Powder coated RAL 9006 grey as standard
- Injection moulded end caps

## TECHNICAL DETAILS


- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Tridonic LED's & driver

PRODUCT CODE	COLOUR TEMP (K)	STD (LM)	LO (LM)	HO (LM)	LENGTH
LSE/850/30/9006	3000 K	1850 LM	1300 LM	2750 LM	850 MM
LSE/850/40/9006	4000 K	1850 LM	1300 LM	2750 LM	850 MM
LSE/1200/30/9006	3000 K	2750 LM	1925 LM	4100 LM	1200 MM
LSE/1200/40/9006	4000 K	2750 LM	1925 LM	4100 LM	1200 MM
LSE/1500/30/9006	3000 K	3375 LM	2375 LM	5025 LM	1500 MM
LSE/1500/40/9006	4000 K	3375 LM	2375 LM	5025 LM	1500 MM
LSE/2500/30/9006	3000 K	5525 LM	3875 LM	8225 LM	2500 MM
LSE/2500/40/9006	4000 K	5525 LM	3875 LM	8225 LM	2500 MM

\* Note STD (LM) supplied as standard suffix end of code for LO or HO output\*


OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING / TOUCH DIM
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/WH	WHITE BODY
/BK	BLACK BODY
/LO	LOW OUTPUT
/HO	HIGH OUTPUT
/LG	MICRO -PRISM OPTIC LG7 COMPLIANCE
/PT001	DIFFUSER EXTRACT TOOL
/PCV	PRODUCT COLOUR VARIATION

## CONTINUOUS MOUNTING

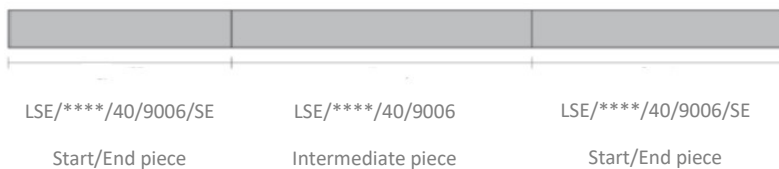


\*\*\*Suffix code with SE for Start/End piece \*\*\*

## DIMENSIONS

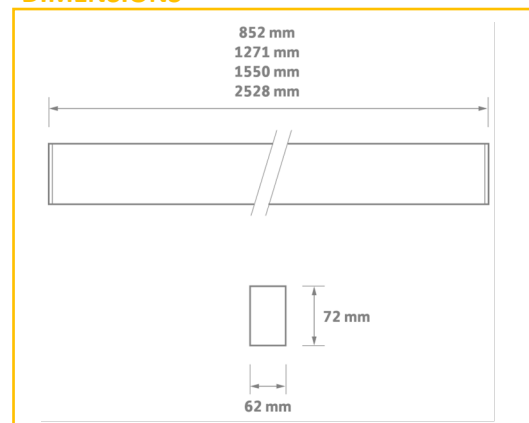

# MIXx

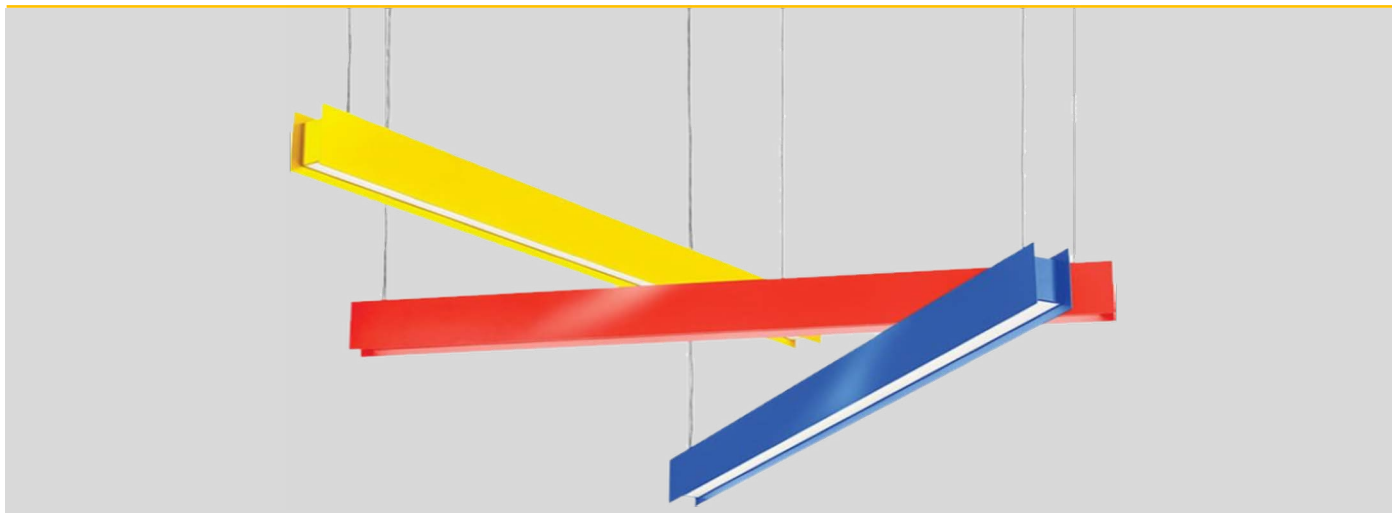


MiXx is available in two sizes 40mm & 60mm wide & 1200mm, 1500mm in length, An upright option is also available, having the option of optics & RAL paint finishes. MIXx can be provided with fixed output or DALI gear.


## TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- 3Hr Emergency Facility
- Optic options
- Direct Or Direct/Indirect
- Control options - DALI, Wireless


## PAINT COLOUR

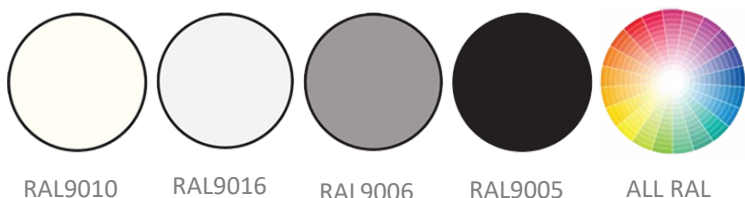

## OPTICS

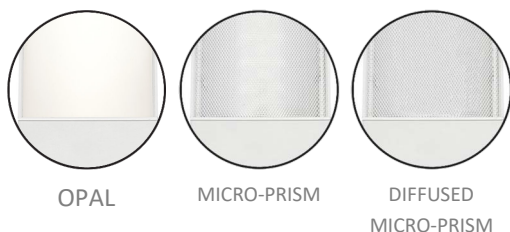


## DIMENSIONS

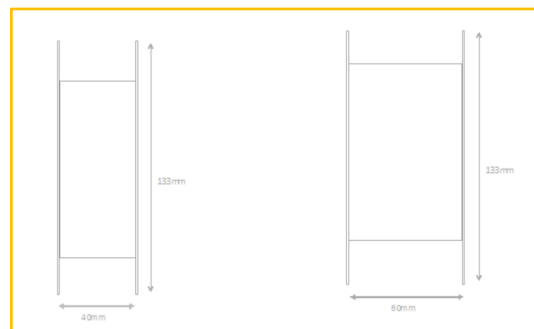

## ORDERING INFORMATION

Please contact our Sales Office with your project enquiry, as MIXx is quoted on a project basis

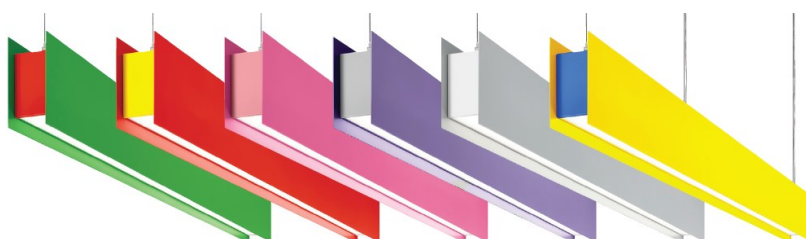

# Ouse




Ouse is available as a fully customisable products with direct or direct/indirect light opal or micro-prism diffuser  
Various RAL colour options, sizes from 580mm x 580mm up to 2400mm x 2400mm please consult our sales team with you size requirement.


## TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- Control options - DALI, Wireless
- Optic options
- Direct Or Direct/Indirect


## PAINT COLOUR



RAL9010



RAL9016



RAL9006



RAL9005



ALL RAL

## OPTICS



OPAL



MICRO-PRISM



DIFFUSED MICRO-PRISM



# Prizma



## APPLICATIONS

- Event Spaces
- Warehouses
- Cold Storage
- Industrial Areas


## CONSTRUCTION

- Die-cast aluminium housing epoxy powder coated RAL7043
- Stainless steel mounting hoop
- Polycarbonate optic
- IK02 impact rating

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000 & 4000K
- 120° Beam angle
- Life 55,000hrs L80/B10

## DIMENSIONS

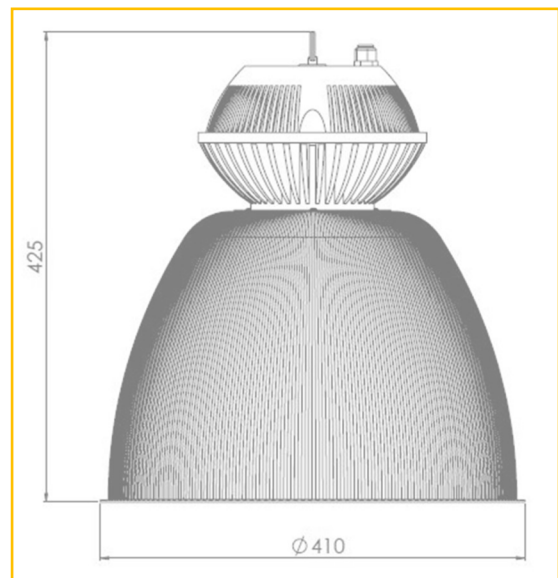

ORDER CODE	DESCRIPTION
PZI/34/4K/PCR	PRIZMA 34W, 4,802LM, 4K, 410MM REFRACTOR
PZI/48/4K/PCR	PRIZMA 48W, 6,147LM, 4K, 410MM REFRACTOR
PZI/69/4K/PCR	PRIZMA 69W, 8,101LM, 4K, 410MM REFRACTOR
PZI/85/4K/PCR	PRIZMA 98W, 10,128LM, 4K, 410MM REFRACTOR

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING CONTROL
/M3	3HR MAINTAINED EMERGENCY
/PCV	PRODUCT COLOUR VARIATION



# Ribble 'S'



## APPLICATIONS

- Reception
- Atrium
- Canteens
- Core Areas


## CONSTRUCTION

- Fabricated steel body epoxy powder coated white RAL9003 as standard
- Opal PMMA diffuser
- Body colour options WH, BK, SL, RAL

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K & TW
- Suspension kit 1.5 mtr as standard

## DIMENSIONS

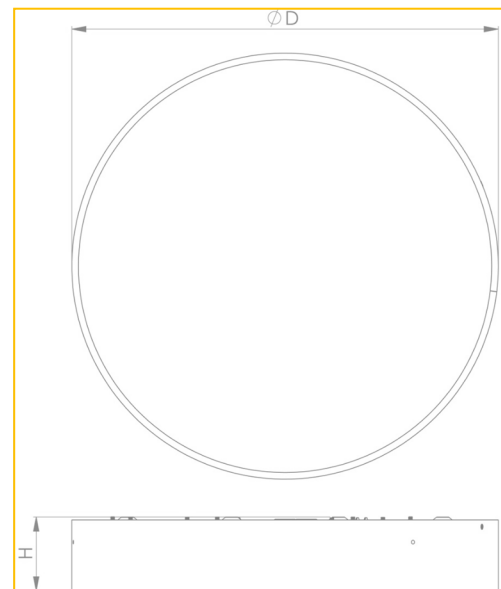

D = 300/450/600 H = 77mm

D = 900mm H = 87mm

PRODUCT CODE	DESCRIPTION
RIS/18/4K/WH/OP	RIBBLE, 18W, 4K, 300MM, OPAL, 2,540lm
RIS/21/4K/WH/OP	RIBBLE, 21W, 4K, 300MM, OPAL, 2,851lm
RIS/31/4K/WH/OP	RIBBLE, 31W, 4K, 450MM, OPAL, 4,011lm
RIS/36/4K/WH/OP	RIBBLE, 36W, 4K, 450MM, OPAL, 4,806lm
RIS/45/4K/WH/OP	RIBBLE, 45W, 4K, 600MM, OPAL, 7,385lm
RIS/52/4K/WH/OP	RIBBLE, 52W, 4K, 600MM, OPAL, 8,604lm
RIS/69/4K/WH/OP	RIBBLE, 69W, 4K, 900MM, OPAL, 11,480lm
RIS/80/4K/WH/OP	RIBBLE, 80W, 4K, 900MM, OPAL, 13,132lm

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/MPO	Micro-prism diffuser UGR<19
/BTC	Casambi wireless control


Ordering Format: Product Code / Option

Example: RIS/36/4K/WH/DALI

IP40



# Skyler

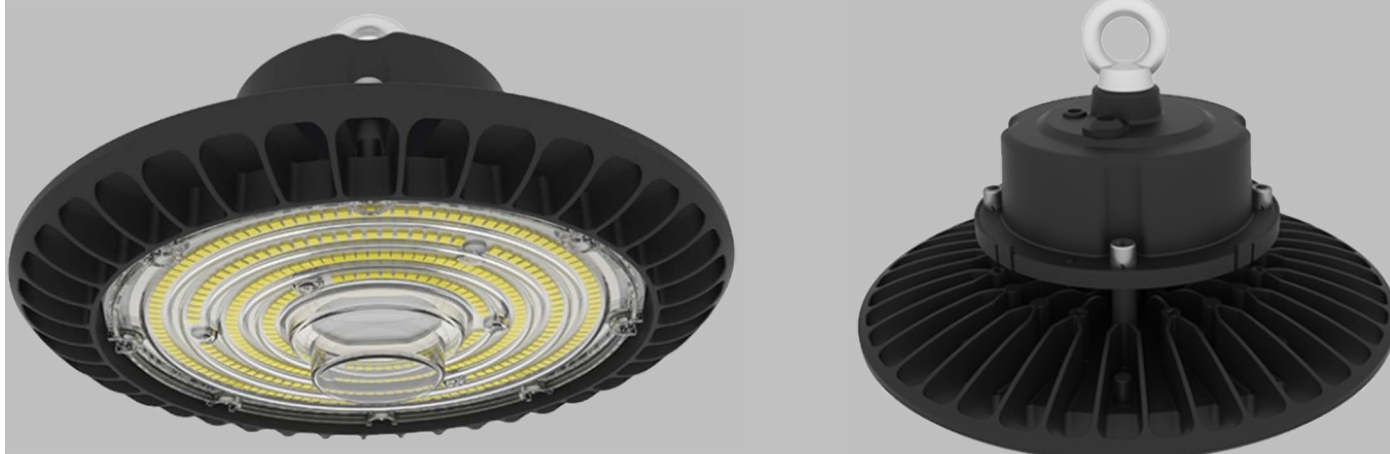

## APPLICATIONS

- Factories
- Warehouses
- Cold Storage
- Industrial Areas

## CONSTRUCTION


- Die-cast aluminium housing epoxy powder coated
- Stainless steel mounting hoop
- Polycarbonate optics
- IK08 impact rating

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 4000K
- 120° Beam angle

ORDER CODE	DESCRIPTION
SK/100/4K/BK	SKYLER 100W 13000LM 4K 230mm BODY
SK/150/4K/BK	SKYLER 150W 19500LM 4K 270mm BODY
SK/200/4K/BK	SKYLER 200W 26000LM 4K 320mm BODY

## DIMENSIONS

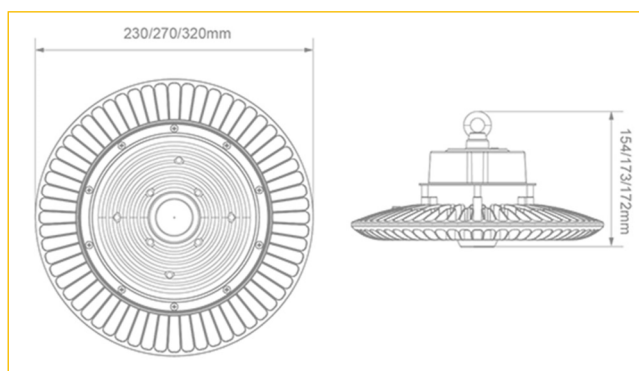

OPTIONS	DESCRIPTION
/MS	MICROWAVE SENSOR


Ordering Format: Product Code / Option

Example: SK/100/4K/BK/MS

IP66



# Trinity

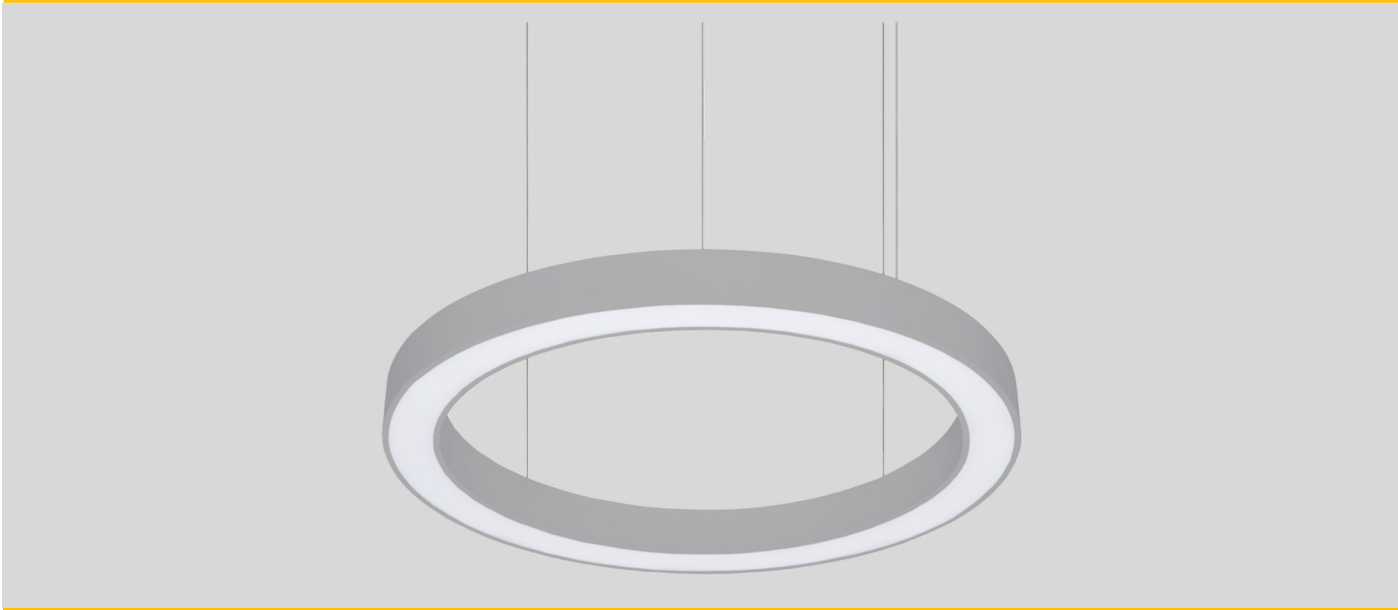

## APPLICATIONS

- Reception
- Atrium
- Core Areas

## CONSTRUCTION

- Fabricated aluminium body epoxy powder coated
- Opal PMMA diffuser
- Body colour options BK, GR, WH


## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Suspension kit 2 mtr as standard

ORDER CODE	DESCRIPTION
TR/17/4K/WH	TRINITY 17W 2014LM 4000K WHITE BODY
TR/24/4K/WH	TRINITY 24W 2744LM 4000K WHITE BODY
TR/35/4K/WH	TRINITY 35W 3772LM 4000K WHITE BODY
TR/27/4K/WH	TRINITY 27W 3295LM 4000K WHITE BODY
TR/38/4K/WH	TRINITY 38W 4491LM 4000K WHITE BODY
TR/55/4K/WH	TRINITY 55W 6173LM 4000K WHITE BODY
TR/35/4K/WH	TRINITY 35W 4394LM 4000K WHITE BODY
TR/50/4K/WH	TRINITY 50W 5987LM 4000K WHITE BODY
TR/73/4K/WH	TRINITY 73W 8231LM 4000K WHITE BODY
TR/49/4K/WH	TRINITY 49W 6225LM 4000K WHITE BODY
TR/70/4K/WH	TRINITY 70W 8482LM 4000K WHITE BODY
TR/103/4K/WH	TRINITY 103W 11660LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/BK	Black body
/GR	Silver Grey body
/BTC	Casambi Wireless Control

## DIMENSIONS

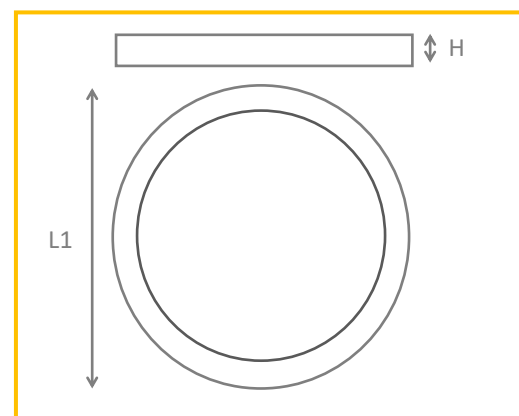

- L1 - 17W/24W/35W - 600MM - H - 80MM
- L1 - 27W/38W/55W - 900MM - H - 80MM
- L1 - 35W/50W/73W - 1200MM - H - 80MM
- L1 - 49W/70W/103W - 1600MM - H 80MM





# Worm




Worm is available as a fully customisable products with direct or direct/indirect light opal or micro-prism diffuser  
Various RAL colour options, sizes, please consult our sales team with you size requirement.


## TECHNICAL DETAILS

- Extruded aluminium section
- Tridonic Driver & PCB's
- Control options - DALI, Wireless
- Optic options
- Direct Or Direct/Indirect


## PAINT COLOUR



RAL9010



RAL9016



RAL9006



RAL9005



ALL RAL

## OPTICS



OPAL



MICRO-PRISM



DIFFUSED MICRO-PRISM



# Track



Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural & Feature

Anti-Vandal



LIGHTING SOLUTIONS

# C130-T



## APPLICATIONS

- Meeting rooms
- Corridors
- Gallery

## CONSTRUCTION


- Die-cast aluminium housing epoxy powder coated
- Faceted reflector

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Colour body option WH, BK, SG

ORDER CODE	DESCRIPTION
C130T/1300/40/WH	C130T 12W 1100LM 4000K WHITE BODY
C130T/2000/40/WH	C130T 18W 2000LM 4000K WHITE BODY
C130T/2700/40/WH	C130T 27W 2700LM 4000K WHITE BODY
C130T/4000/40/WH	C130T 38W 4000LM 4000K WHITE BODY

## DIMENSIONS

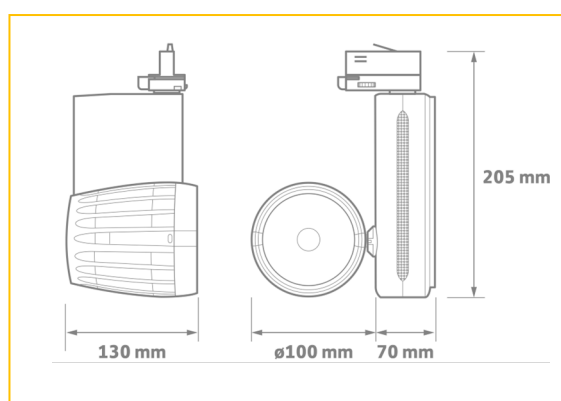

OPTIONS	DESCRIPTION
/DALI	DALI/DSI DIMMING
/9	RA 90 COLOUR RENDERING
/24	24° BEAM ANGLE
/40	40° BEAM ANGLE
/60	60° BEAM ANGLE

Ordering Format: Product Code / Option  
Example: C130T/1300/40/WH/DALI





## APPLICATIONS

- Meeting rooms
- Corridors
- Gallery

## CONSTRUCTION


- Die-cast aluminium housing epoxy powder coated
- Faceted reflector

## TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Colour body option WH, BK

ORDER CODE	DESCRIPTION
KN/1000/40/WH	KENNETT 1025LM 4000K WHITE BODY
KN/1700/40/WH	KENNETT 1750LM 4000K WHITE BODY

## DIMENSIONS

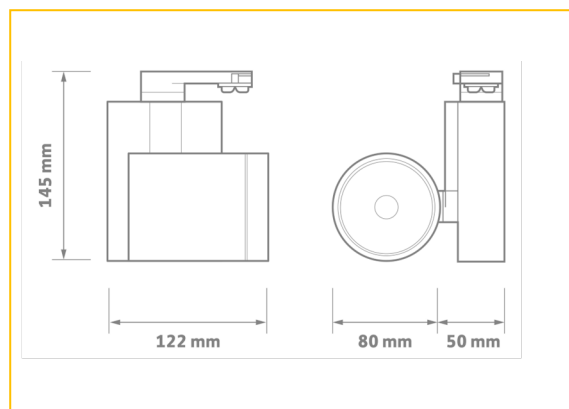


OPTIONS	DESCRIPTION
/DALI	DALI/DSI DIMMING
/9	RA 90 COLOUR RENDERING
/NB	NARROW BEAM ANGLE
/WB	WIDE BEAM ANGLE
/BK	BLACK FINISH

Ordering Format: Product Code / Option  
 Example: KN/1000/40/WH/DALI



# One Track

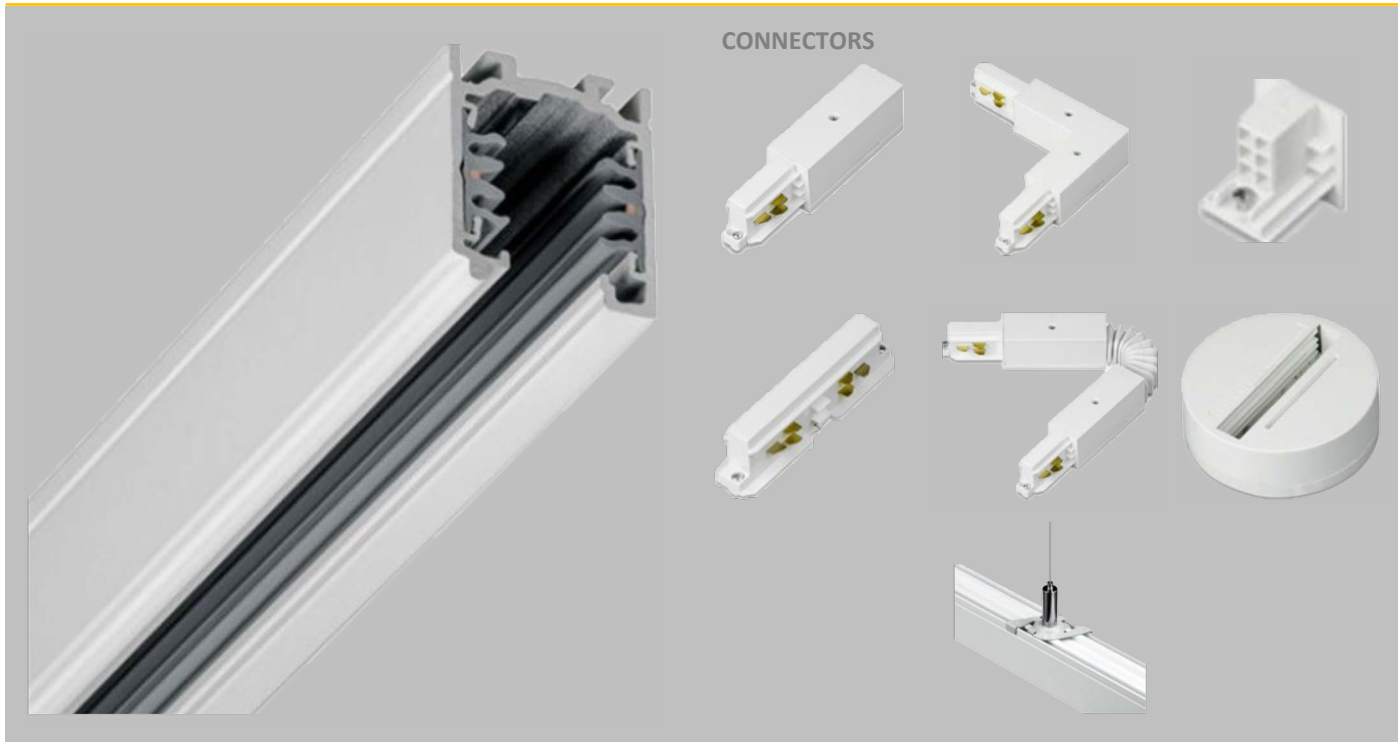

WHITE REFERENCE	BLACK REFERENCE	DESCRIPTION
9000-1/W/ST	9000-1/B/ST	1 MTR TRACK
9000-2/W/ST	9000-1/B/ST	2 MTR TRACK
9001/W	9001/B	END FEED
9003/W	9003/B	STRAIGHT CONNECTOR
9004/W	9004/B	END CAP
9011/W	9011/B	L-CONNECTOR/FEED
9018/W	9018/B	FLEXIBLE ADJUSTABLE CORNER CONNECTOR
S-9000/114-T/W	S-9000/114-T/B	2 MTR WIRE SUSPENSION KIT
9000/BP-D/W	9000/BP-D/B	PATRESS





Telephone: **01323 729337** or **01323 430047**

Email: [sales@aldlighting.com](mailto:sales@aldlighting.com)

[www.aldlighting.com](http://www.aldlighting.com)

Track

Suspended

Surface & Wall

Recessed

Exterior

Emergency

Downlighters

Architectural &  
Feature

Anti-Vandal