


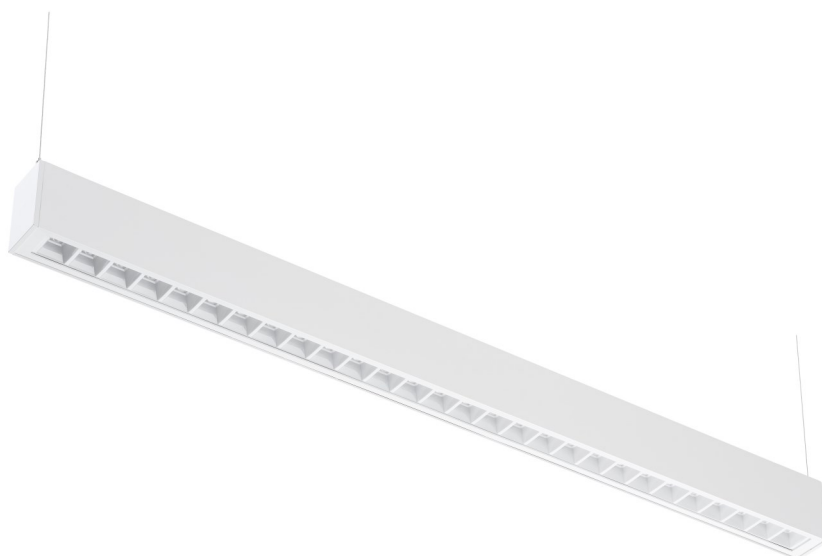

APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

CONSTRUCTION

- Extruded aluminium body epoxy powder coated RAL 9010 & 9005 as standard
- Aluminium end plates


TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Tridonic LED's
- Low UGR
- Efficiency up to 145lm/W

OPTIONS

- /DALI - Touch Dim / DALI dimming
- /M3 - 3hr maintained emergency
- /D3 - 3hr maintained DALI emergency
- /WW - White body, White cells
- /WB - White body, Black cells
- /BB - Black body, Black cells
- /BW - Black body, White cells

DIMENSIONS

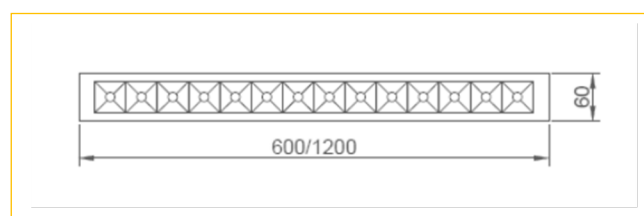

PRODUCT CODE	DESCRIPTION
LC/6/4K/WW	LUMA-CELL 634MM WHITE BODY WHITE CELL
LC/12/4K/WW	LUMA-CELL 1170MM WHITE BODY WHITE CELL

** Suffix product code according to requirements **