



APPLICATIONS

- Stores
- Car parks
- Food / Clean areas
- Warehouses
- Factories

CONSTRUCTION

- Extruded PMMA body
- Stainless Steel clips
- Opal diffuser
- IK10 rated impact test to BSEN 2262


TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT 4000K
- Tridonic/Helvar Driver

OPTIONS

- /DALI - DALI dimming
- /M3 - 3hr Emergency
- /PIR - Motion Sensor
- /MW1 - Micro-wave sensor
- /DMW - DALI micro-wave sensor

DIMENSIONS

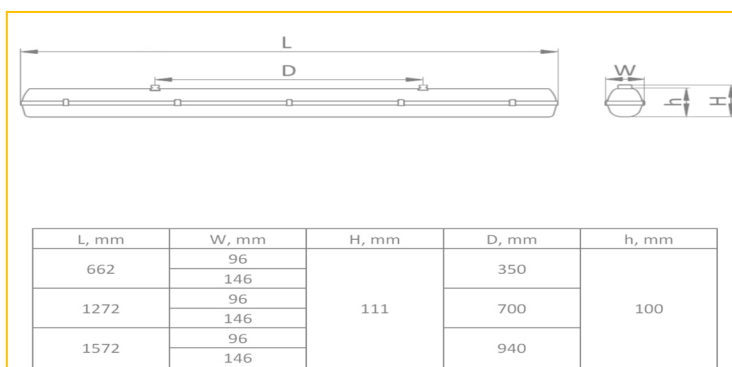

ORDER CODE	DESCRIPTION
VN/15/4K/65/OP	VENTNOR, 15W, 4K, 2,268LM, 662MM
VN/18/4K/65/OP	VENTNOR, 18W, 4K, 2,674LM, 662MM
VN/26/4K/65/OP	VENTNOR, 26W, 4K, 3,742LM, 1275MM
VN/36/4K/65/OP	VENTNOR, 36W, 4K, 5,348LM, 1275MM
VN/31/4K/65/OP	VENTNOR, 31W, 4K, 4,676LM, 1575MM
VN/45/4K/65/OP	VENTNOR, 45W, 4K, 6,685LM, 1575MM
VN/59/4K/65/OP	VENTNOR, 59W, 4K, 8,666LM, 1575MM

