



APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

CONSTRUCTION

- Steel fabricated body epoxy powder coated white as standard
- Polar micro-prism diffuser
- Direct/Indirect illumination 60/40

TECHNICAL DETAILS


- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Body colour options WH, BK, SG



OPTIONS

- /DALI - DALI/DSI dimming
- /M3 - 3hr Emergency
- /D3 - 3hr DALI monitored emergency
- /BLE - Casambi wireless control
- /SM - Surface mounted body

DIMENSIONS

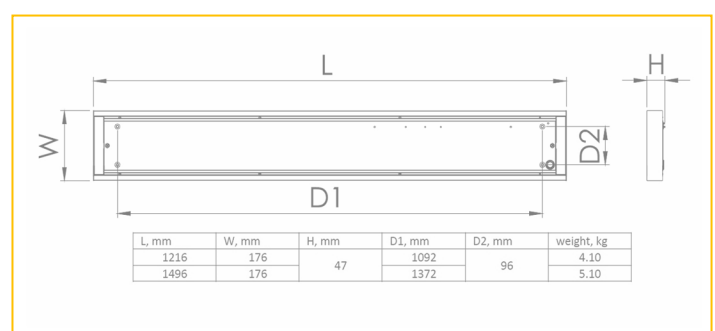

PRODUCT CODE	DESCRIPTION
FZ/26/4K/WS/WH	FRAZER, 26W,3997LM, 1215MM LONG
FZ/38/4K/WS/WH	FRAZER, 38W,5447LM, 1215MM LONG
FZ/34/4K/WS/WH	FRAZER, 34W, 5114LM, 1496MM LONG
FZ/48/4K/WS/WH	FRAZER, 48W, 6968LM, 1496MM LONG

Suffix /WH to body colour required