

Trend - A



APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

DIMENSIONS

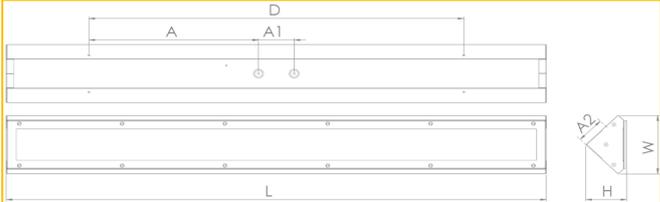

L, mm	W, mm	H, mm	D, mm	A, mm	A ₁ , mm	A ₂ , mm
380	135	135	300	100	100	80
660			450	175		
940			600	250		
1220			900	400		
1500			1050	525		

PRODUCT CODE	DESCRIPTION
TRA/13/4K/WH	TREND A 13W 1,548LM 4K 380MM
TRA/19/4K/WH	TREND A 19W 2,334LM 4K 660MM
TRA/28/4K/WH	TREND A 28W 3,502LM 4K 940MM
TRA/38/4K/WH	TREND A 38W 4,668LM 4K 1220MM
TRA/55/4K/WH	TREND A 55W 5,295LM 4K 1500MM

OPTIONS	DESCRIPTION
/DALI	DALI Dimming
/M3	3Hr Emergency
/D3	3Hr DALI Monitored Emergency
/MW1	Microwave sensor



Ordering Format: Product Code / Option

Example: TRA/13/4K/WH/DALI