

# Trend - S



## APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


## CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

## DIMENSIONS

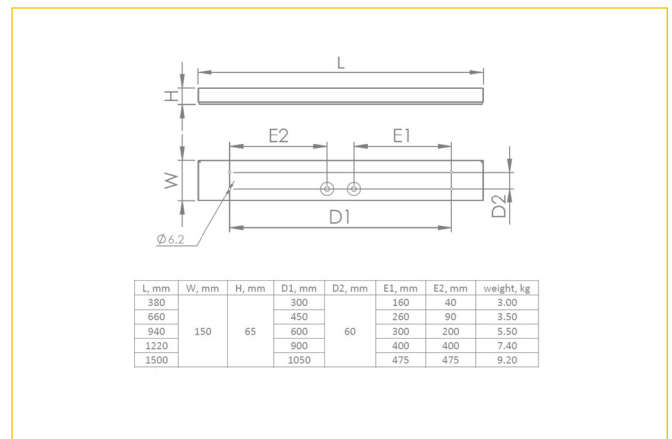

| PRODUCT CODE | DESCRIPTION                   |
|--------------|-------------------------------|
| TRS/13/4K/WH | TREND S 13W 1,548LM 4K 380MM  |
| TRS/19/4K/WH | TREND S 19W 2,334LM 4K 660MM  |
| TRS/28/4K/WH | TREND S 28W 3,502LM 4K 940MM  |
| TRS/38/4K/WH | TREND S 38W 4,668LM 4K 1220MM |
| TRS/55/4K/WH | TREND S 55W 5,295LM 4K 1500MM |

| OPTIONS | DESCRIPTION                  |
|---------|------------------------------|
| /DALI   | DALI Dimming                 |
| /M3     | 3Hr Emergency                |
| /D3     | 3Hr DALI Monitored Emergency |
| /MW1    | Microwave sensor             |

Ordering Format: Product Code / Option

Example: TRS/13/4K/WH/DALI

