

Capri - 195




APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Tridonic Chip set

DIMENSIONS

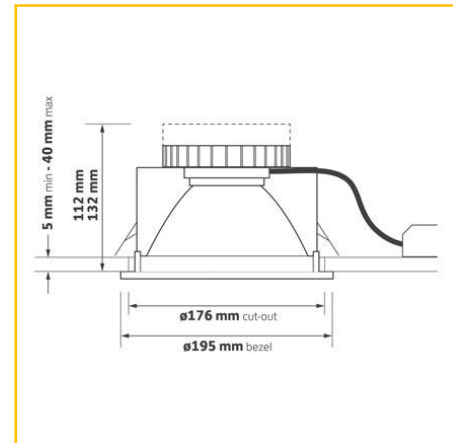

CONSTRUCTION

- Fabricated sheet metal work epoxy powder coated white
- Aluminium reflector
- Die-cast aluminium bezel epoxy powder coated white

ACCESSORIES



IP65/002/195

IP65 clear glass



IP65/008/195

IP65 opal glass



TA342

IP54 Fully etched glass



TA305

Glass halo



TA344

IP54 Opal polycarbonate



CBC300

Custom bezel RAL

| PRODUCT CODE | POWER | TEMP (K) | OUTPUT (LM) |
|-----------------|-------|----------|-------------|
| C195/1000/30/WH | 9.5W | 3000K | 989LM |
| C195/1000/40/WH | 9.5W | 4000K | 1001LM |
| C195/2000/30/WH | 17.5W | 3000K | 1763LM |
| C195/2000/40/WH | 17.5W | 4000K | 1784LM |
| C195/3000/30/WH | 27W | 3000K | 2709LM |
| C195/3000/40/WH | 27W | 4000K | 2741LM |
| C195/4000/30/WH | 46.5W | 3000K | 4177LM |
| C195/4000/40/WH | 46.5W | 4000K | 4480LM |

| OPTIONS | DESCRIPTION |
|---------|--------------------------------|
| /EM | 3HR EMERGENCY CONVERSION |
| /EMD | 3HR DALI EMERGENCY CONVERSION |
| /STE | SELF TEST EMERGENCY CONVERSION |
| /DALI | TOUCH DIMMING/DALI |
| /SPC | SINGLE POINT CONNECTION |

Ordering Format: Product Code / Option

Example: C195/1000/30/WH/EM

