


Capri - 130

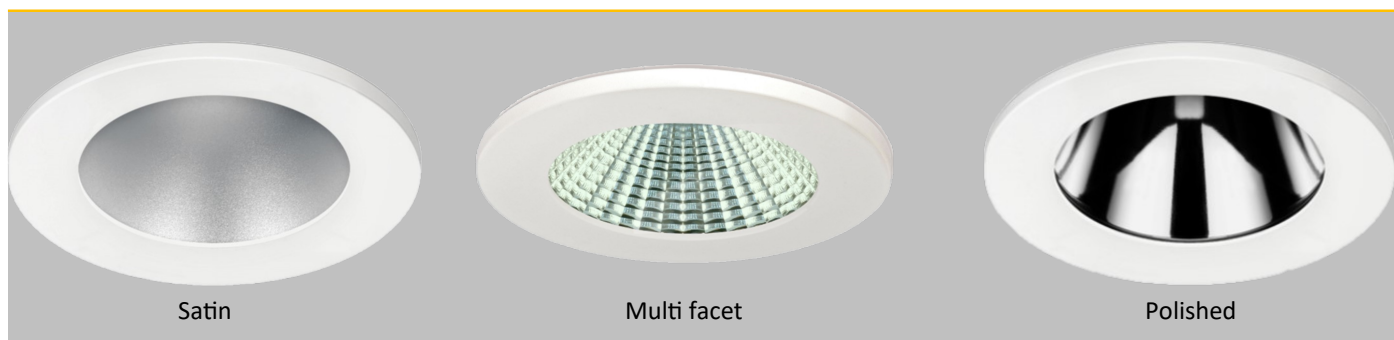

APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

CONSTRUCTION

- Die-cast aluminium body epoxy powder coated black
- Aluminium reflector
- Die-cast aluminium twist lock bezel epoxy Powder coated white

TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Philips Driver
- Philips SLM Chip set

ACCESSORIES



TA65/002
IP65 bezel

TA206
Etch dome



TA241
Centre etch


TA226
Etched halo

TA220
Blue Insert



IP2000
Plaster-In

DIMENSIONS

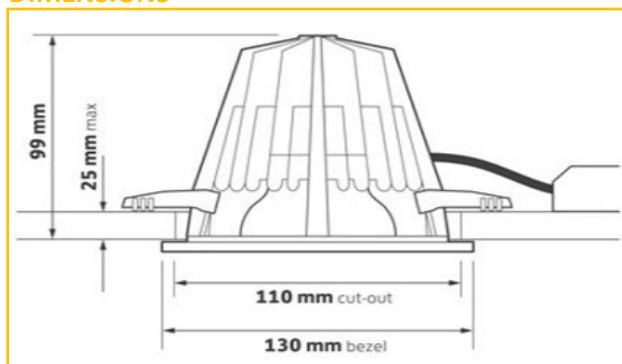

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C130/600/30/WH	7W	3000K	600LM
C130/600/40/WH	7W	4000K	600LM
C130/1100/30/WH	12W	3000K	1150LM
C130/1100/40/WH	12W	4000K	1150LM
C130/1800/30/WH	18W	3000K	1800LM
C130/1800/40/WH	18W	4000K	1800LM
C130/2300/30/WH	27W	3000K	2375LM
C130/2300/40/WH	27W	4000K	2375LM

OPTIONS	DESCRIPTION
/EMI	3HR EMERGENCY CONVERSION
/EMDI	3HR DALI EMERGENCY CONVERSION
/STEI	SELF TEST EMERGENCY CONVERSION
/DALI	TOUCH DIMMING/DALI
/SPC	SINGLE POINT CONNECTION

Ordering Format: Product Code / Option

Example: C130/600/30/WH/EMI

IP20

