


Capri - LIN

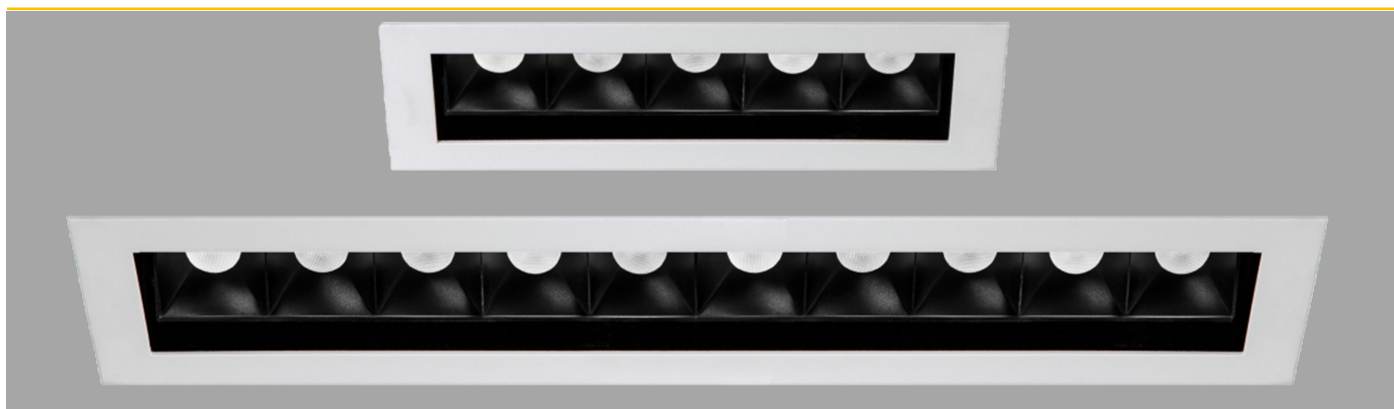

TECHNICAL DETAILS


- CRI>80
- CCT colour option 3000K, 4000K
- Tridonic Driver
- Samsung LH351 chip set
- High clarity micro prismatic

35° medium beam lens

APPLICATIONS

- Domestic dwellings
- Corridors
- Displays
- Receptions

DIMENSIONS

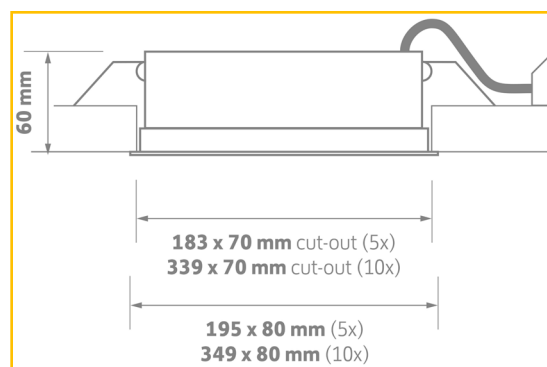

CONSTRUCTION

- Extruded aluminium super-fin heatsink
- Injection moulding low glare matt black baffle
- Die-cast aluminium bezel epoxy powder Coated white

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CLI/5/30/BK/WH	13W	3000	1075LM
CLI/5/40/BK/WH	13W	4000	1075LM
CLI/10/30/BK/WH	23W	3000	2150LM
CLI/10/40/BK/WH	23W	4000	2150LM

ACCESSORIES



Fittings with emergency pod

OPTIONS	DESCRIPTION
/EM	3HR EMERGENCY CONVERSION
/EMD	3HR DALI EMERGENCY CONVERSION
/STE	SELF TEST EMERGENCY CONVERSION
/DALI	TOUCH DIMMING/DALI
/SPC	SINGLE POINT CONNECTION
/9	RA 90 COLOUR RENDERING
/WSB	WHITE SOFTLIGHT BAFFLE
/NB	NARROW BEAM

Ordering Format: Product Code / Option

Example: CLI/5/30/BK/WH/EM

IP44

