


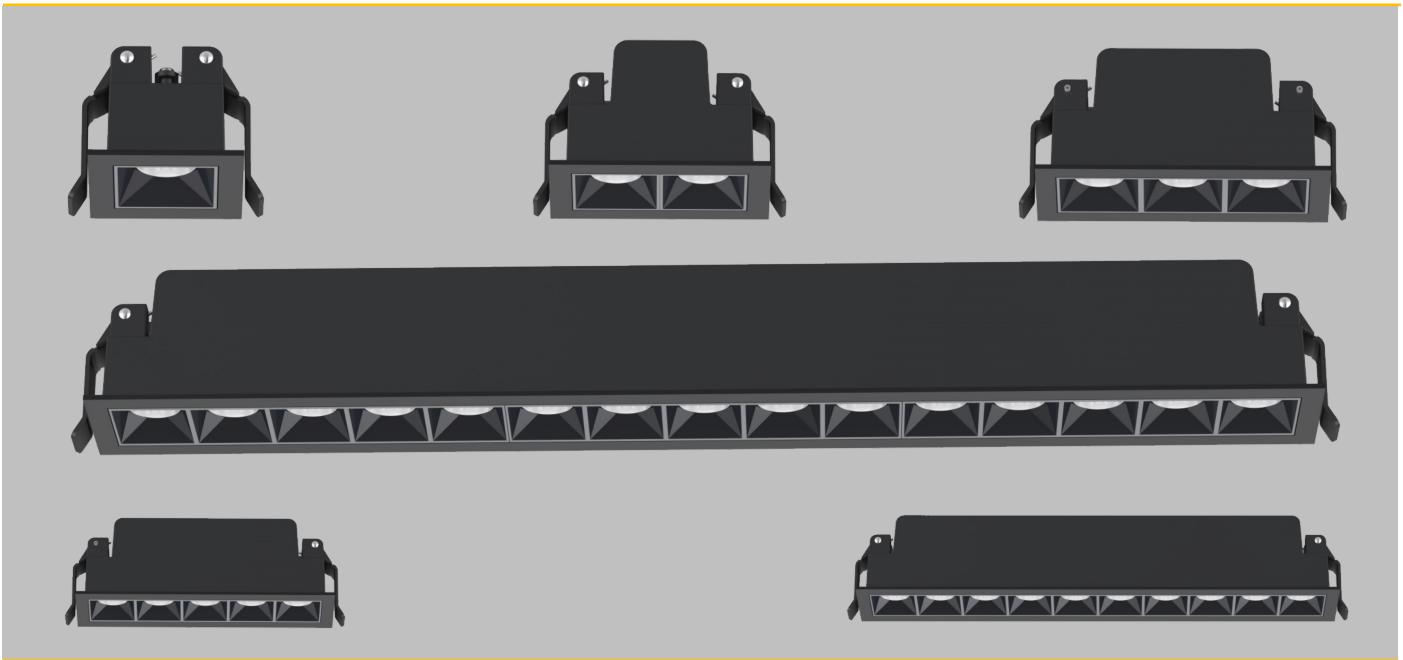

APPLICATIONS

- Board Rooms
- Corridors
- Functions suite
- Receptions

CONSTRUCTION

- Die-Cast aluminium body epoxy Powder coated Black RAL9005
- low Glare UGR<19

TECHNICAL DETAILS

- CRI>90
- CCT colour option 2700K, 4000K
- 36°Reflector
- CREE XP-G2 Chip set

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
CIC1/4/4K/BK	4W	2700 / 4000K	140LM (827) / 190LM (840)
CIC2/6/4K/BK	6W	2700 / 4000K	270LM (827) / 370LM (840)
CIC3/9/4K/BK	9W	2700 / 4000K	400LM (827) / 600LM (840)
CIC5/13/4K/BK	13W	2700 / 4000K	650LM (827) / 940LM (840)
CIC10/25/4K/BK	25W	2700 / 4000K	1220LM (827) / 1820LM (840)
CIC15/37/4K/BK	37W	2700 / 4000K	1990LM (827) / 2830LM (840)

Suffix 4K to 2K for 2700 Kelvin

OPTIONS	DESCRIPTION
/DALI	TOUCH DIM / DALI
/BTC	CASAMBI WIRELESS CONTROL

Ordering Format: Product Code / Option

Example: CIC1/4/4K/BK/DALI

IP20



Cicero

DIMENSIONS

