


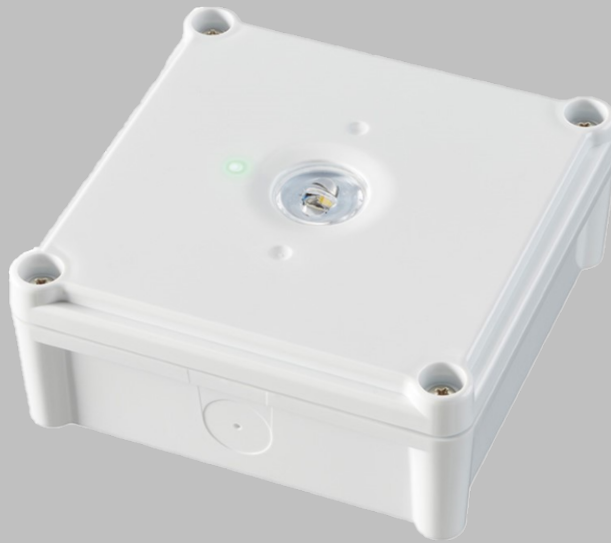

APPLICATIONS

- Canopy
- Muster Point
- External exit points


TECHNICAL DETAILS

- CCT 6000K
- CRI >80
- 295 Lumens
- Self-Test supplied as standard
- (LiFePO4) Lithium Iron Phosphate battery
- Surface mounted
- Supplied with corridor, wide angle & high Level optic
- IP65

CONSTRUCTION

- Injection moulded fully integrated white body for surface mounting

DIMENSIONS

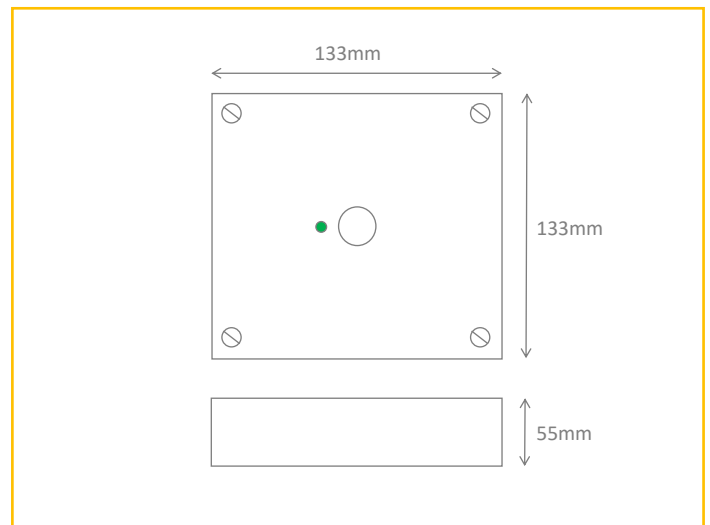

PRODUCT CODE	DESCRIPTION
UR/NM3/CR	URDA NM3 C/W CORRIDOR OPTIC
UR/NM3/WA	URDA NM3 C/W WIDE ANGLE OPTIC
UR/NM3/HL	URDA NM3 C/W HIGH LEVEL OPTIC

OPTIONS	DESCRIPTION
/BK	BLACK FINISH

IP65



Ordering Format: Product Code / Option

Example: UR/NM3/CR/BK