

Lustre 'R'



APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

CONSTRUCTION


- Extruded aluminium body
- Aluminium end caps
- TP(a) opal lens

TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Tridonic LED's & driver
- Lumen depreciation L80/F10 @60,000 hours


DIMENSIONS

PRODUCT CODE	COLOUR TEMP (K)	STD (LM)	LO (LM)	HO (LM)	LENGTH
LRE/850/3K/WH	3000 K	1800	1300	2700	850 MM
LRE/850/4K/WH	4000 K	1900	1350	2825	850 MM
LRE/1200/3K/WH	3000 K	2700	1900	4025	1200 MM
LRE/1200/4K/WH	4000 K	2825	1975	4225	1200 MM
LRE/1500/3K/WH	3000 K	3300	2325	4925	1500 MM
LRE/1500/4K/WH	4000 K	3450	2425	5175	1500 MM

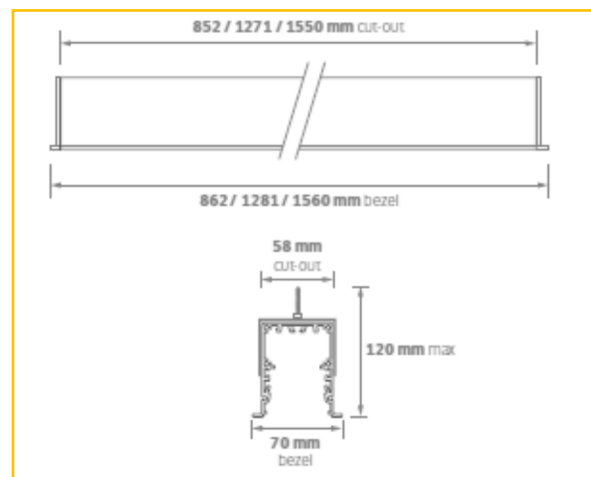


OPTIONS	DESCRIPTION
/DALI	TOUCH DIM / DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/SE	END CAPS
/JK	JOINING KIT INC WIRING LINKS
/LO	LOW OUTPUT
/HO	HIGH OUTPUT
/LG	LOW GLARE PRISMATIC DIFFUSER
/PT001	DIFFUSER EXTRACT TOOL

CONTINUOUS MOUNTING

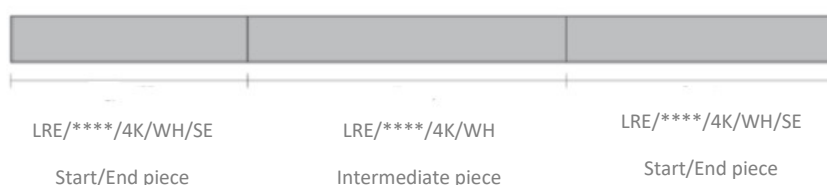

***Suffix code with SE for Start/End piece ***

*Note STD (LM) supplied as standard
suffix end of code for LO or HO output*



/LG

Low glare diffuser



/PT001

Diffuser Extract Tool

IP20

