



APPLICATIONS

- Reception
- Corridors
- Canteens
- Core Areas

CONSTRUCTION

- Fabricated steel body
- Epoxy powder coated white
- Steel side retaining brackets
- Opal PMMA diffuser


TECHNICAL DETAILS

- Various Wattages
- CRI>80
- Life 100,000hrs L80/B50
- CCT Options 3000K, 4000K

ORDER CODE	DESCRIPTION
DA/18/4K/OP/WH	DARTFORD, 4K, 1898LM, 326MM DIA
DA/27/4K/OP/WH	DARTFORD, 4K, 2574LM, 326MM DIA
DA/25/4K/OP/WH	DARTFORD, 4K, 2876LM, 476MM DIA
DA/36/4K/OP/WH	DARTFORD, 4K, 3914LM, 476MM DIA
DA/54/4K/OP/WH	DARTFORD, 4K, 6275LM, 624MM DIA
DA/78/4K/OP/WH	DARTFORD, 4K, 8540LM, 624MM DIA
DA/79/4K/OP/WH	DARTFORD, 4K, 8790LM, 922MM DIA
DA/100/4K/OP/WH	DARTFORD, 4K, 10847LM, 922MM DIA

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY

DIMENSIONS

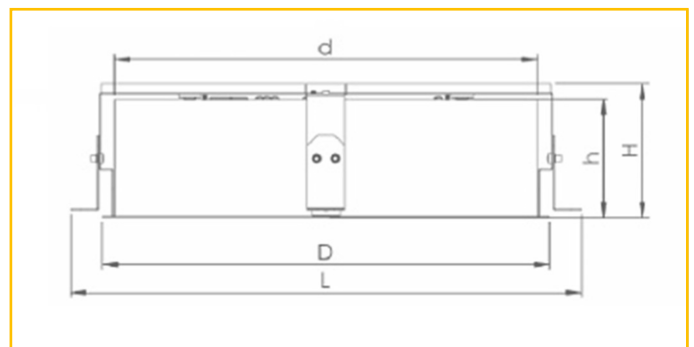

d, mm	D, mm	D1, mm	H, mm	h, mm	L, mm
300	326	310	143	126	395
450	476	460	143	126	545
600	624	610	153	136	690
900	922	910	153	136	995

Ordering Format: Product Code / Option

Example: DA/18/4K/OP/WH/DALI

