

Delta Plus +



APPLICATIONS

- Offices
- Meeting Rooms
- Reception
- Classrooms


CONSTRUCTION

- Steel fabricated body epoxy powder coated white
- Suitable for exposed Tee
- TP(a) rated polar white diffuser

TECHNICAL DETAILS

- CRI>80
- CCT 3000K, 4000K

DIMENSIONS

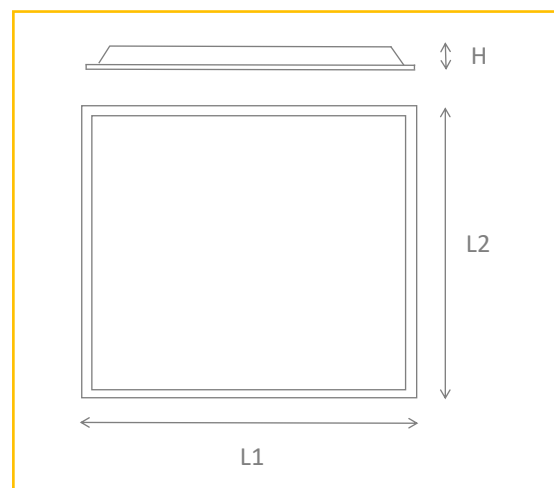

L1 - 595mm/1195mm L2 - 595mm H - 38mm

PRODUCT CODE	DESCRIPTION
DLP+/35/4K/PW	DELTA PLUS + 35W 3200LM 4K
DLP+/54/4K/PW	DELTA PLUS + 54W 5300LM 4K

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/UGR	MICRO-PRISM DIFFUSER

Suffix PW to UGR for micro-prism diffuser

Ordering Format: Product Code / Option

Example: DLP+/35/4K/PW/DALI

IP20

