

Trend - R



APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

DIMENSIONS

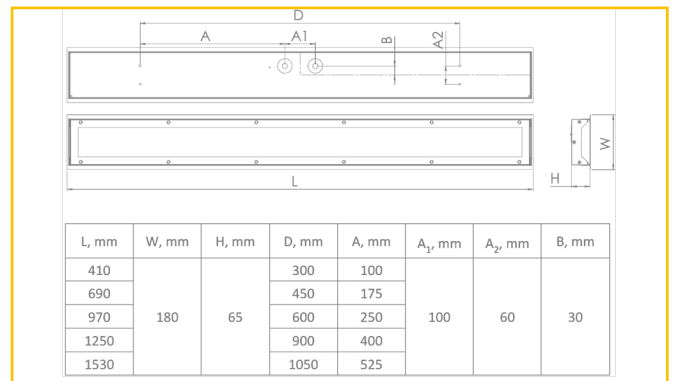

PRODUCT CODE	DESCRIPTION
TRR/11/4K/WH	TREND R 11W 1,548LM 4K 410MM
TRR/19/4K/WH	TREND R 19W 2,334LM 4K 690MM
TRR/28/4K/WH	TREND R 28W 3,502LM 4K 970MM
TRR/38/4K/WH	TREND R 38W 4,668LM 4K 1250MM
TRR/41/4K/WH	TREND R 41W 5,295LM 4K 1530MM

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR



Ordering Format: Product Code / Option

Example: TRR/11/4K/WH/DALI