

Trend - S



APPLICATIONS

- Railway
- Subways/Underground passages
- Prison
- Psychiatric Unit


CONSTRUCTION

- Fabricated sheet metal housing, fully welded construction, epoxy powder coated white
- Opal Polycarbonate diffuser 850° glow wire
- Stainless anti-tamper fixings

TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- IK10+ Mechanical impact resistance
- Samsung LED's SDCM 3

DIMENSIONS

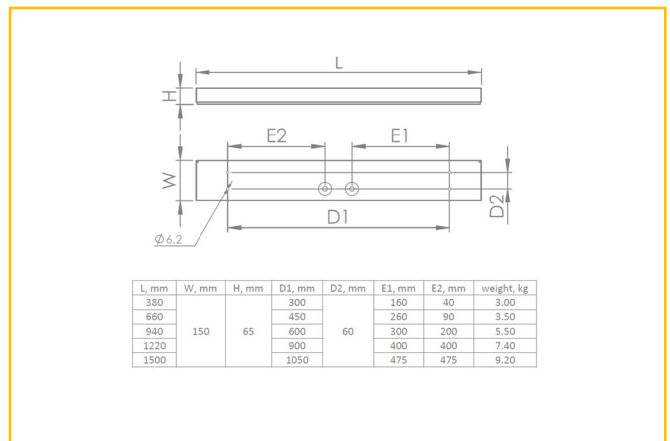

PRODUCT CODE	DESCRIPTION
TRS/13/4K/WH	TREND S 13W 1,548LM 4K 380MM
TRS/19/4K/WH	TREND S 19W 2,334LM 4K 660MM
TRS/28/4K/WH	TREND S 28W 3,502LM 4K 940MM
TRS/38/4K/WH	TREND S 38W 4,668LM 4K 1220MM
TRS/55/4K/WH	TREND S 55W 5,295LM 4K 1500MM

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: TRS/13/4K/WH/DALI

