


Capri - 232

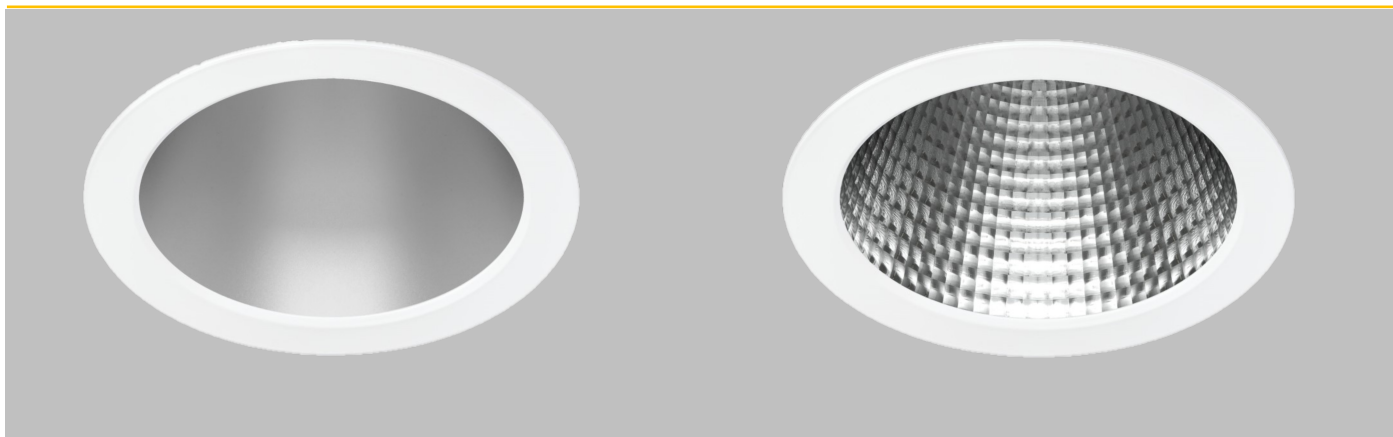

APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Receptions

TECHNICAL DETAILS

- CRI>80
- CCT colour option 3000K, 4000K
- Xitanium Driver
- Philips DLM Flex Chip set

CONSTRUCTION

- Fabricated sheet metal work epoxy powder coated white
- Aluminium reflector
- Die-cast aluminium bezel epoxy powder coated white

ACCESSORIES




IP65 Facet



IP65 Satin

DIMENSIONS

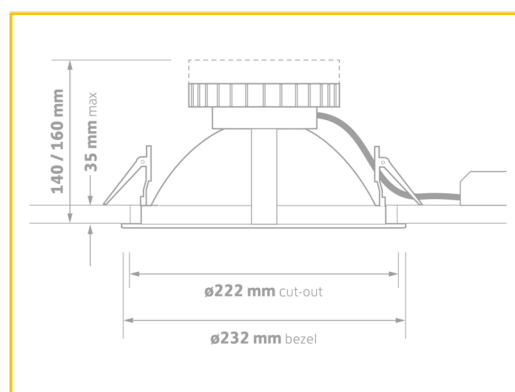

PRODUCT CODE	POWER	TEMP (K)	OUTPUT (LM)
C232/1100/30/WH	15W	3000K	1100LM
C232/1100/40/WH	15W	4000K	1100LM
C232/2000/30/WH	25W	3000K	2000LM
C232/2000/40/WH	25W	4000K	2000LM
C232/3000/30/WH	34W	3000K	3000LM
C232/3000/40/WH	34W	4000K	3000LM
C232/4000/30/WH	49W	3000K	4100LM
C232/4000/40/WH	49W	4000K	4100LM

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/STE	SELF TEST EMERGENCY
/DALI	TOUCH DIMMING/DALI
/BTC	CASAMBI WIRELESS CONTROL (INC DIM)

Ordering Format: Product Code / Option

Example: C232/1100/30/WH/M3



IP20

