



APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard
- Polar micro-prism diffuser
- Direct/Indirect illumination 60/40

TECHNICAL

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Body colour options WH, BK, SG

PRODUCT CODE	DESCRIPTION
FZ/26/4K/WS/WH	FRAZER, 26W,3997LM, 1215MM LONG
FZ/38/4K/WS/WH	FRAZER, 38W,5447LM, 1215MM LONG
FZ/34/4K/WS/WH	FRAZER, 34W, 5114LM, 1496MM LONG
FZ/48/4K/WS/WH	FRAZER, 48W, 6968LM, 1496MM LONG

DIMENSIONS

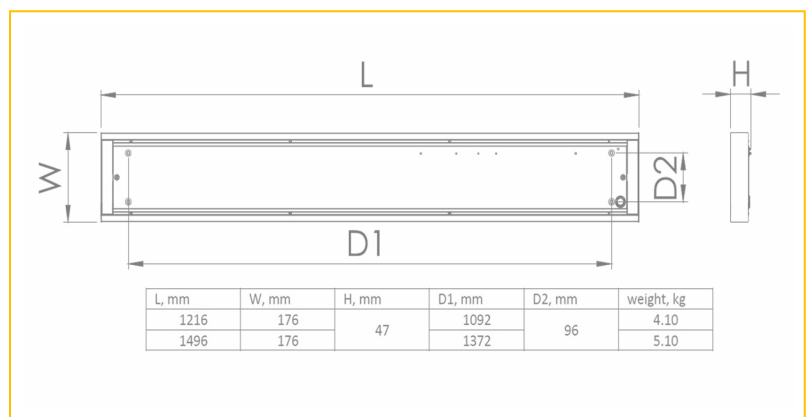

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL (DIM)
/ECO	SWITCH DIM CONTROL

Suffix /WH to body colour required

Ordering Format: Product Code / Option

Example: FZ/26/4K/WS/WH/DALI

IP20

