


Lustre DI

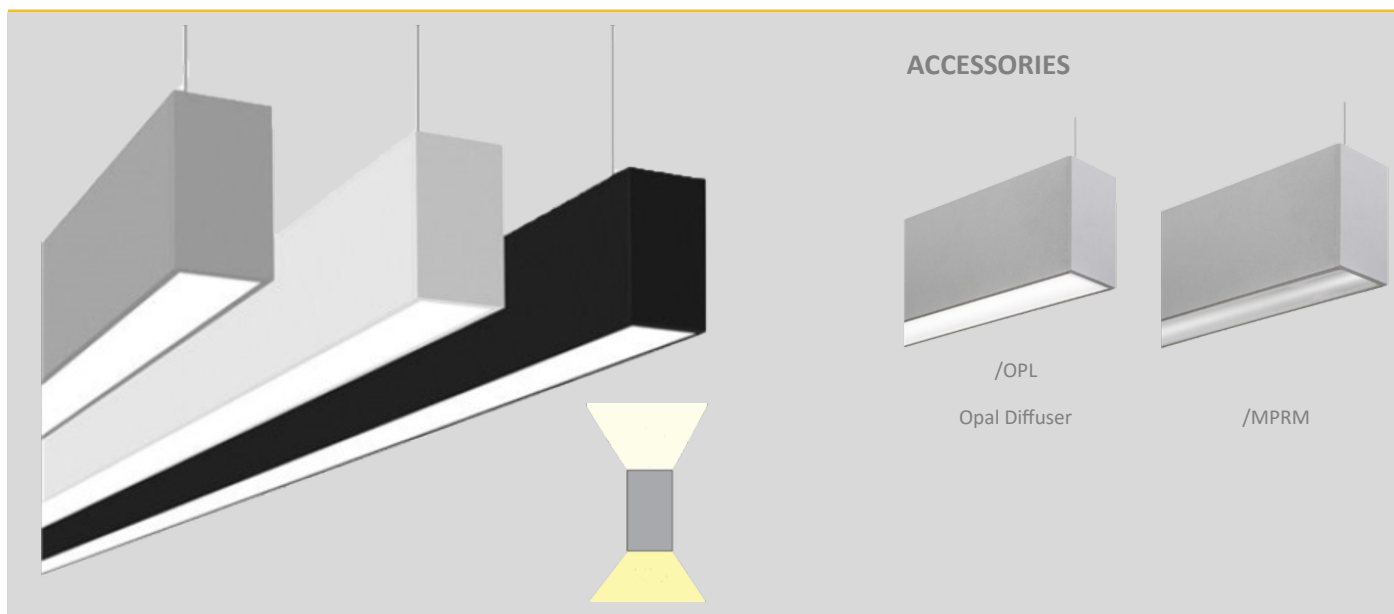

APPLICATIONS

- Meeting Rooms
- Corridors
- Receptions
- Offices

CONSTRUCTION

- Extruded aluminium body epoxy Powder coated RAL 9016 White as standard
- Aluminium flat end caps

TECHNICAL DETAILS


- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Samsung 561B+ LED's
- Direct/Indirect Distribution

PRODUCT CODE	COLOUR TEMP(K)	LUMENS (LM)	BODY LENGTH
LDI/850/4K/WH	4000K	2350	850MM
LDI/1200/4K/WH	4000K	3525	1200MM
LDI/1500/4K/WH	4000K	4550	1500MM
LDI/2500/4K/WH	4000K	7050	2500MM

* Note STD (LM) quoted but other option available using NFC Technology *

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING / TOUCH DIM
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/GR	GREY BODY
/BK	BLACK BODY
/SEB	RIGHT ANGLE 90°ELBOW
/STG	TEE JUNCTION
/MPRM	MICRO-PRISM FOR LG7 COMPLIANCE
/SE	FLAT ALUMINIUM END CAPS

DIMENSIONS

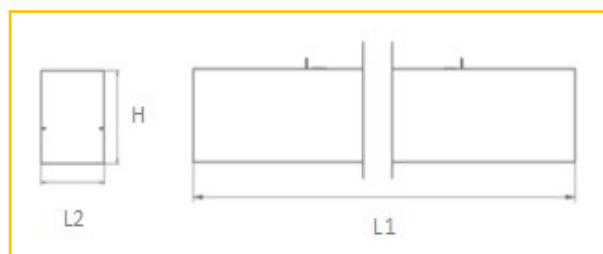

L1 - 850mm, 1200mm, 1500mm, 2500mm

L2 - 62mm x H - 109mm

CONTINUOUS MOUNTING



LDI/850/4K/WH/SE

LDI/850/4K/WH/INT

LDI/850/4K/WH/SE

Start/End piece

Intermediate piece

Start/End piece

Suffix code with SE for start/End piece

