


# Academy

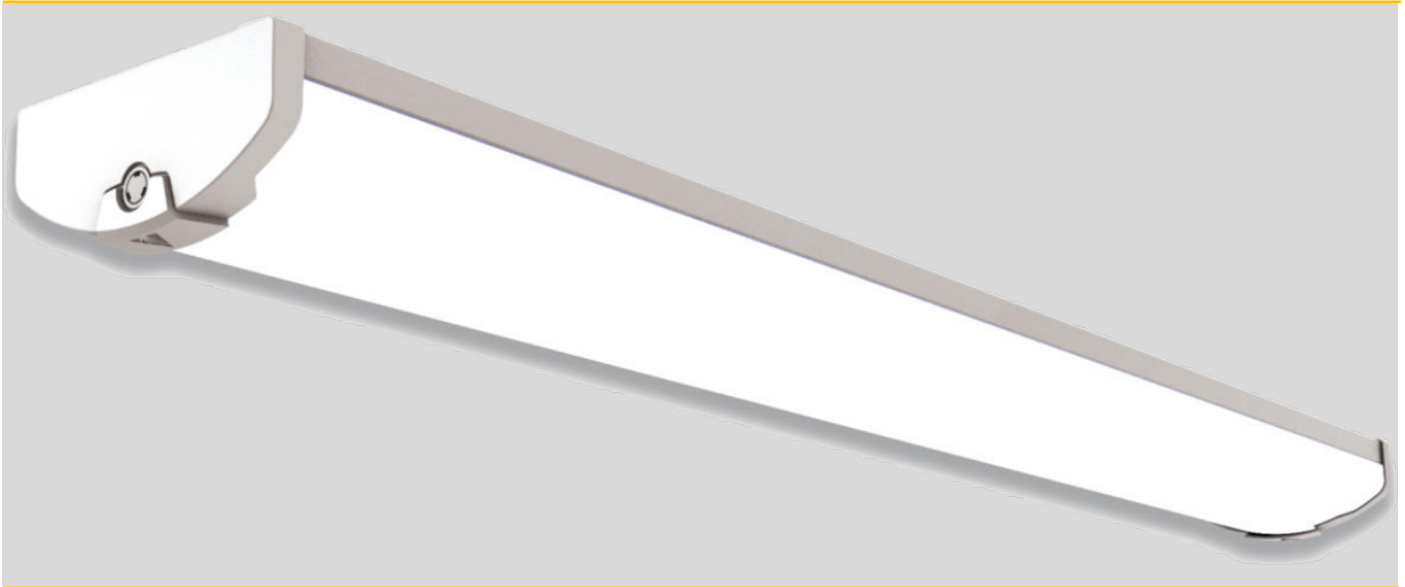

## APPLICATIONS

- Classrooms
- Corridors
- Canteens
- Workshops

## CONSTRUCTION


- Fabricated sheet metal base epoxy powder Coated white
- Polycarbonate diffuser
- Polycarbonate captive end caps

## TECHNICAL DETAILS

- CRI>80
- CCT 4000K
- Tridonic Driver
- Epistar chip set

PRODUCT CODE	DESCRIPTION
ACM/20/4K/WH	ACADEMY 20W 3125LM 4000K
ACM/28/4K/WH	ACADEMY 28W 4000LM 4000K
ACM/32/4K/WH	ACADEMY 32W 4700LM 4000K
ACM/41/4K/WH	ACADEMY 41W 6000LM 4000K

## DIMENSIONS

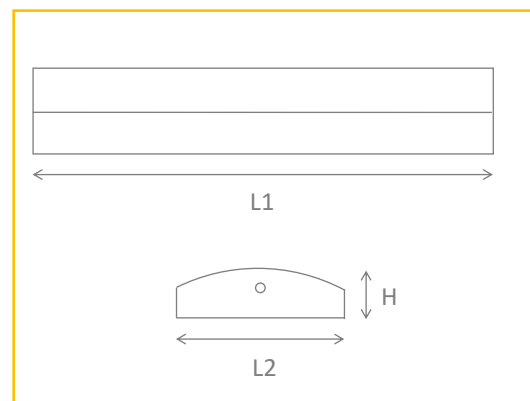

L1 - 20/28w 1200mm x L2 175mm x 75mm

L1 - 33/41w 1500mm x L2 175mm x 75mm

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/MW1	MICROWAVE SENSOR
/DMW	DALI MICROWAVE SENSOR

Ordering Format: Product Code / Option

Example: ACM/20/4K/WH/DALI

