


Ardent

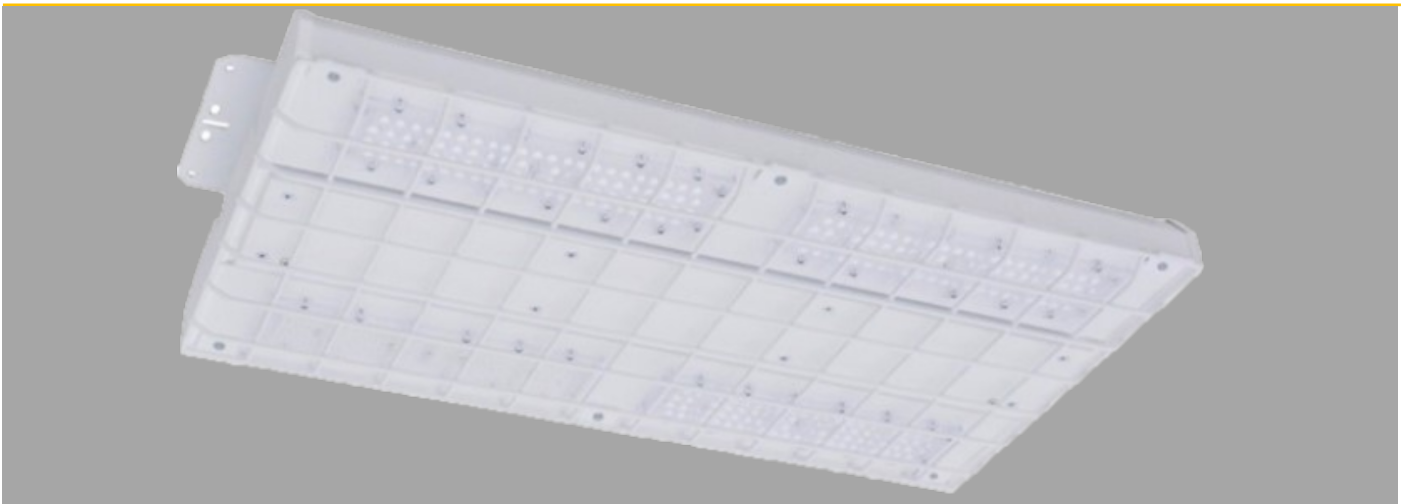

APPLICATIONS

- Industrial
- Sports Halls
- Distribution Centre
- Gymnasium

CONSTRUCTION

- Aluminium extruded body
- Epoxy powder coated finish
- Steel wire guard

TECHNICAL DETAILS


- CRI >80
- Suspended or Surface mounted
- Samsung / Tridonic Chip set
- 4000K
- IK10
- Long life 52,000h L90/B10

PRODUCT CODE	DESCRIPTION
ARD/70/4K/WH/L**	ARDENT 70W, 12350LM 60 DEGREE OPTIC
ARD/80/4K/WH/L**	ARDENT 80W, 12891LM 60 DEGREE OPTIC
ARD/90/4K/WH/L**	ARDENT 90W, 15367LM 60 DEGREE OPTIC
ARD/115/4K/WH/L**	ARDENT 115W, 18863LM 60 DEGREE OPTIC
ARD/135/4K/WH/L**	ARDENT 135W, 22357LM 60 DEGREE OPTIC
ARD/160/4K/WH/L**	ARDENT 160W, 25649LM 60 DEGREE OPTIC
ARD/170/4K/WH/L**	ARDENT 170W, 28148LM 60 DEGREE OPTIC

OPTIONS	DESCRIPTION
/DALI	DALI DIMMING
/M3	3HR EMERGENCY
/HBAIR	BTC WIRELESS MASTER SENSOR 16MTR
/HBPIR	FIXED ON/OFF PIR SENSOR

OPTICS	DESCRIPTION
/L40	40 x 40° BEAM ANGLE
/L30x65	30 x 65° BEAM ANGLE
/L60	60 x 60° BEAM ANGLE
/75	75 x 75° BEAM ANGLE
/90	90 x 90° BEAM ANGLE

DIMENSIONS

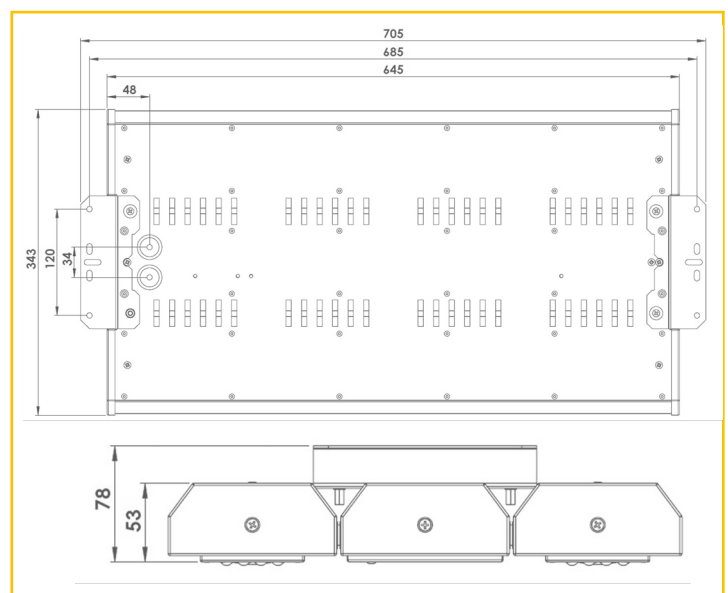

Ordering Format: Product Code / Option

Example: ARD/70/4K/WH/L40/DALI

Suffix end of ordering code with required beam angle

