

Frazer 'S'



APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard
- Polar micro-prism diffuser

TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Body colour options WH, BK, SG

PRODUCT CODE	DESCRIPTION
FZ/26/4K/SM/WH	FRAZER, 26W, 3,534LM, 1203MM LG
FZ/35/4K/SM/WH	FRAZER, 35W, 5,051LM, 1203MM LG
FZ/42/4K/SM/WH	FRAZER, 42W, 5,785LM, 1203MM LG
FZ/31/4K/SM/WH	FRAZER, 31W, 4,418LM, 1483MM LG
FZ/45/4K/SM/WH	FRAZER, 45W, 6,313LM, 1483MM LG
FZ/52/4K/SM/WH	FRAZER, 52W, 7,231LM, 1483MM LG

DIMENSIONS

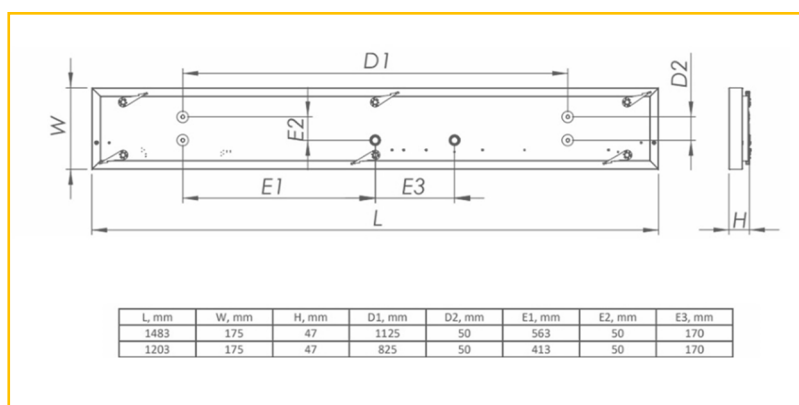

OPTIONS	DESCRIPTION
/DALI	DALI DIMMABLE
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/BTC	CASAMBI WIRELESS CONTROL

Suffix /WH to body colour required

Ordering Format: Product Code / Option

Example: FZ/26/4K/SM/WH/DALI

