Toledo

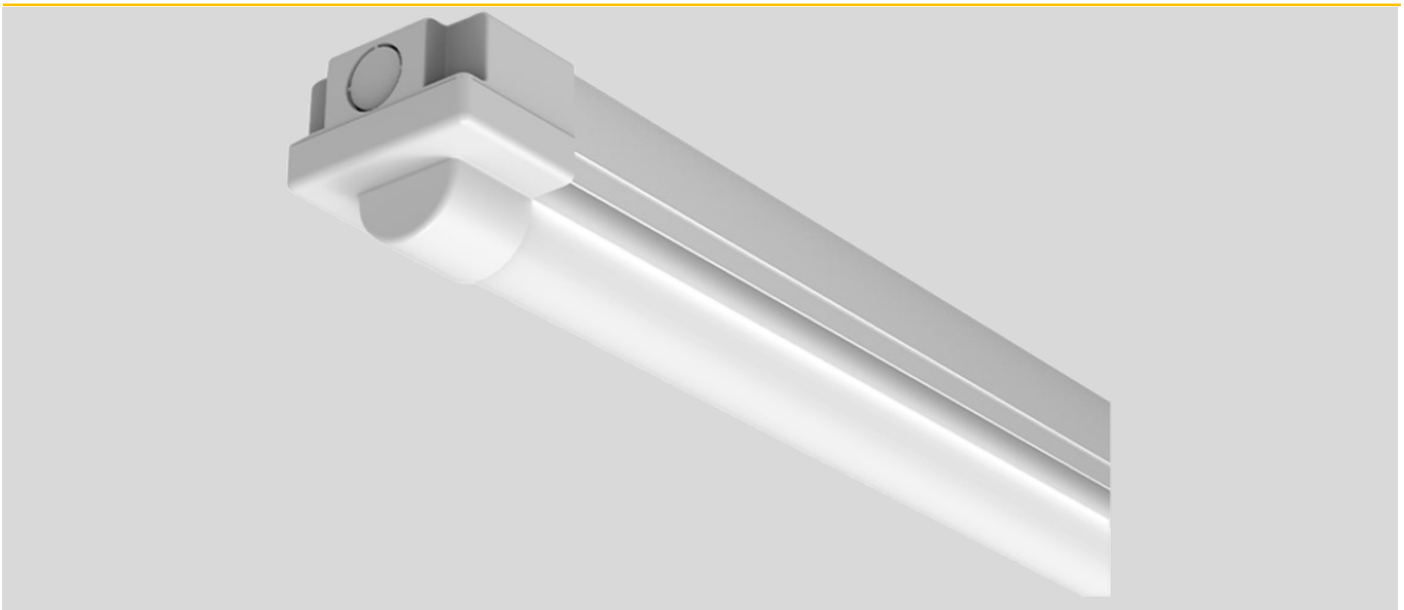

APPLICATIONS

- Activity Halls
- Factories
- Stores
- Workshops

CONSTRUCTION

- Polycarbonate body with steel gear tray
- Polycarbonate opal diffuser
- Polycarbonate captive end caps

TECHNICAL DETAILS

- CRI>80
- Tridonic Driver
- Samsung chip set SDM 3
- 100lm + per watt

PRODUCT CODE	DESCRIPTION
TL/25/4K/OP/WH	TOLEDO 25W 2,700LM 4000K
TL/32/4K/OP/WH	TOLEDO 32W 3,200LM 4000K
TL/47/4K/OP/WH	TOLEDO 47W 4,900LM 4000K
TL/60/4K/OP/WH	TOLEDO 60W 6,000LM 4000K

OPTIONS	DESCRIPTION
/DALI	DALI ADDRESSABLE DIMMING
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMG
/PIR	ON/OFF PIR SENSOR POD
/DPIR	DALI ADDRESSABLE PIR POD

DIMENSIONS

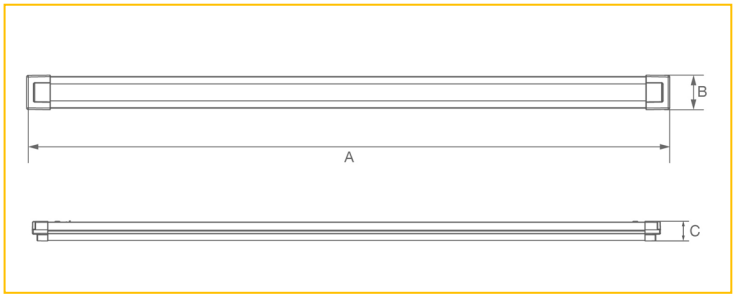

25w/47w A - 1218mm B - 65mm C - 57mm

32w/60w A - 1518mm B - 65mm C - 57mm

Ordering Format: Product Code / Option

Example: TL/25/4K/OP/WH/DALI

IP20