


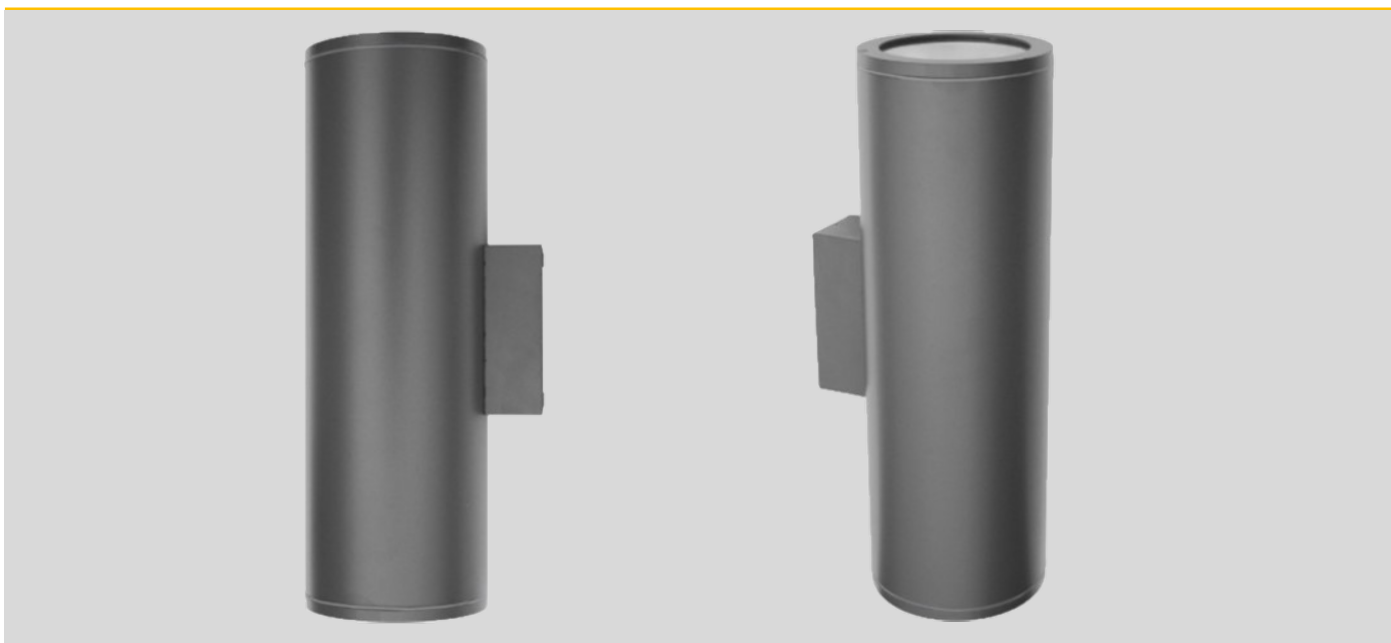

APPLICATIONS

- Corridors
- Facias
- Entrance Lobby
- Atrium

CONSTRUCTION

- Extruded Aluminium
- Tempered glass diffuser
- Epoxy powder coated finish RAL7043


TECHNICAL DETAILS

- CRI >80 - IP65 - IK08
- Wall mounted
- Samsung Chip set
- 3000K, 4000K
- Long life 50,000h L70/B50

PRODUCT CODE	DESCRIPTION
TU/19/4K/30D/UD	TUBO, 19W, 2,150LM, 4K, UP/DOWN
TU/26/4K/30D/UD	TUBO, 26W, 2,901LM, 4K, UP/DOWN
TU/38/4K/30D/UD	TUBO, 38W, 4026LM, 4K, UP/DOWN

OPTIONS	DESCRIPTION
/PCV	PRODUCT COLOUR VARIATION
/60D	2 x 60° BEAM ANGLE
/45D	2 x 45° BEAM ANGLE

DIMENSIONS

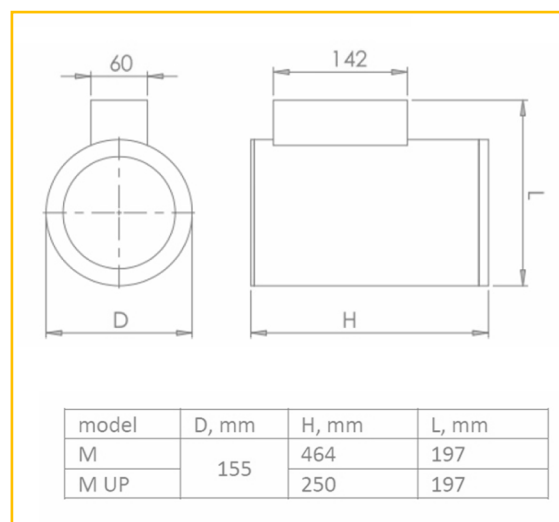

Suffix 4K (4000K) to 3K (3000K) LED Suffix 30D to beam angle required

IP65

**UK
CA**