

Windsor



APPLICATIONS

- Facia Illumination
- Point source
- Signage
- Shrubbery


CONSTRUCTION

- Die-cast aluminium body & frame
- Low glare baffle option
- Injection moulded optics
- Powder coated Chromate conversion coating

TECHNICAL DETAILS

- Option of Optics
- CRI>70+
- CCT 3000 & 4000K
- IK08

DIMENSIONS

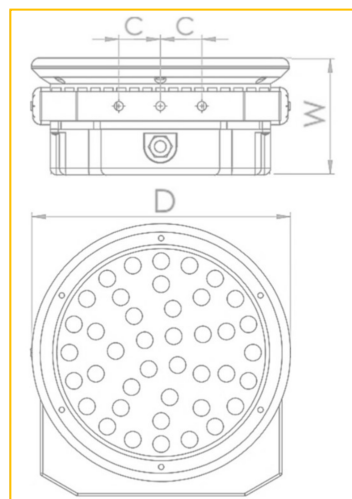

D - 230mm x H - 118mm

PRODUCT CODE	DESCRIPTION
WN/31/4K/L30	WINDSOR, 31W, 4K, 3,800LM, 30°
WN/49/4K/L30	WINDSOR, 49W, 4K, 5,280LM, 30°
WN/57/4K/L30	WINDSOR, 57W, 4K, 5,891LM, 30°

OPTIONS	DESCRIPTION
/DALI	ADDRESSABLE DIMMING
/L15	15 x 15° OPTIC
/L30	30 x 30° OPTIC
/L50	50 x 50° OPTIC

Ordering Format: Product Code / Option

Example: WN/31/4K/L30

** Please suffix 4K to 3K TO 3000 Kelvin - Suffix L30 for required optics**

