

Atlas



APPLICATIONS

- Pathway
- Landscapes
- Car Parks
- Façade illumination


CONSTRUCTION

- Die-cast aluminium body
- Stainless steel bezel
- Tempered glass lens

TECHNICAL DETAILS

- Stainless Steel fixings
- CRI>80
- IK10
- CCT 3000, 4000K
- Life 40,000hrs L80/B50

DIMENSIONS

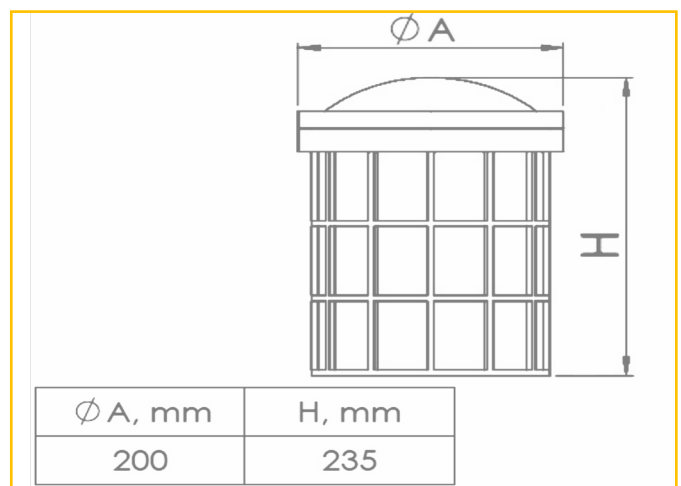

ORDER CODE	DESCRIPTION
ALT/9/4K/L60	ATLAS 9W, 4K, 1086LM, 60° OPTIC
ALT/13/4K/L60	ATLAS 13W, 4K, 1489LM, 60° OPTIC
ALT/19/4K/L60	ATLAS 19W, 4K, 2067LM, 60° OPTIC

OPTIONS	DESCRIPTION
/L30	30°x 30° OPTIC
/L45	45°x 45° OPTIC
/LA1	ASYMMETRIC OPTIC

Ordering Format: Product Code / Option

Example: ALT/9/4K/L30

* Suffix 4K to 3K FOR 3000 Kelvin

