
# **Stelios**



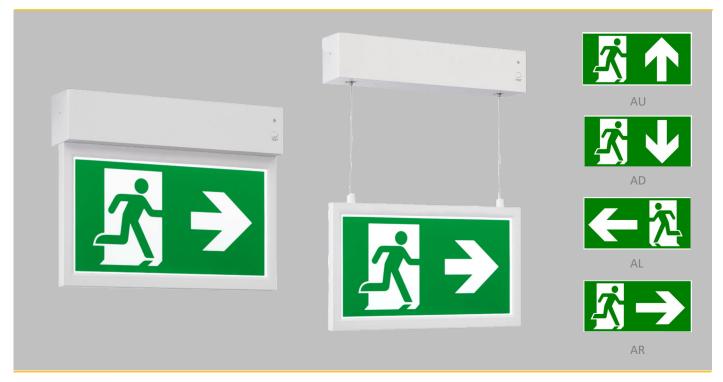

## **APPLICATIONS**

# **TECHNICAL DETAILS**

- Exit points


- CCT 6000K
- CRI >80
- Viewing distance 25mtrs

## **CONSTRUCTION**

- Injection moulded ceiling plate white, injection
  Moulded gear housing
- Wire suspension, Surface mounted
- Flame retardant edge lit plasi-glas legend panel

PRODUCT CODE	DESCRIPTION
STE/LED/M3/**	STELIOS 4W MAINTAINED LED EXIT SIGN

#### **DIMENSIONS**



OPTIONS	DESCRIPTION
/D3	3HR DALI MONITORED EMERGENCY
/DSL	DOUBLE SIDED LEGEND
/STE	SELF TESTING EMERGENCY
/SM	SURFACE MOUNTED
/WS	WIRE SUSPENDED



<sup>\*\*</sup> Suffix end of code with legend required\*\*