

C130-T



APPLICATIONS

- Meeting rooms
- Corridors
- Gallery

CONSTRUCTION

- Die-cast aluminium housing epoxy powder coated
- Faceted reflector


TECHNICAL DETAILS

- Various Wattages
- CRI>80
- CCT Options 3000K, 4000K
- Colour body option WH, BK, SG

ORDER CODE	DESCRIPTION
C130T/1300/40/WH	C130T 12W 1100LM 4000K WHITE BODY
C130T/2000/40/WH	C130T 18W 2000LM 4000K WHITE BODY
C130T/2700/40/WH	C130T 27W 2700LM 4000K WHITE BODY
C130T/4000/40/WH	C130T 38W 4000LM 4000K WHITE BODY

OPTIONS	DESCRIPTION
/DALI	DALI/DSI dimming
/9	Ra 90 colour rendering
/24	24° Beam angle
/40	40° Beam angle
/60	60° Beam angle

DIMENSIONS

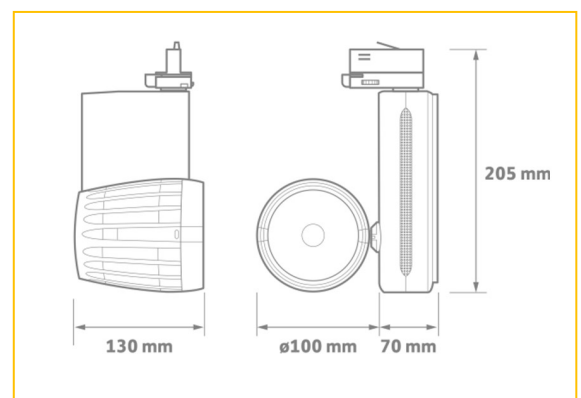

Ordering Format: Product Code / Option

Example: C130T/1300/40/WH/DALI

