

Bodium



APPLICATIONS

- Classrooms
- Corridors
- meeting rooms
- Offices

CONSTRUCTION


- Steel fabricated body epoxy powder coated white as standard (RAL9003)
- Polar micro-prism diffuser PMMA
- Direct/Indirect

TECHNICAL DETAILS

- Various Wattages
- CRI>80
- UGR<19
- 100,000/L80B50

PRODUCT CODE	DESCRIPTION
BTS/17/4K/WH/UPL	BODIUM, 17W, 4K, DID, 300 x 300, 2,485lm
BTS/25/4K/WH/UPL	BODIUM, 25W, 4K, DID, 450 x 450, 3,742lm
BTS/30/4K/WH/UPL	BODIUM, 30W, 4K, DID, 450 x 450, 4,489lm
BTS/37/4K/WH/UPL	BODIUM, 37W, 4K, DID, 600 x 600, 5,612lm
BTS/59/4K/WH/UPL	BODIUM, 59W, 4K, DID, 900 x 900, 8,932lm
BTS/79/4K/WH/UPL	BODIUM, 79W, 4K, DID, 900 x 900, 11,962lm

DIMENSIONS

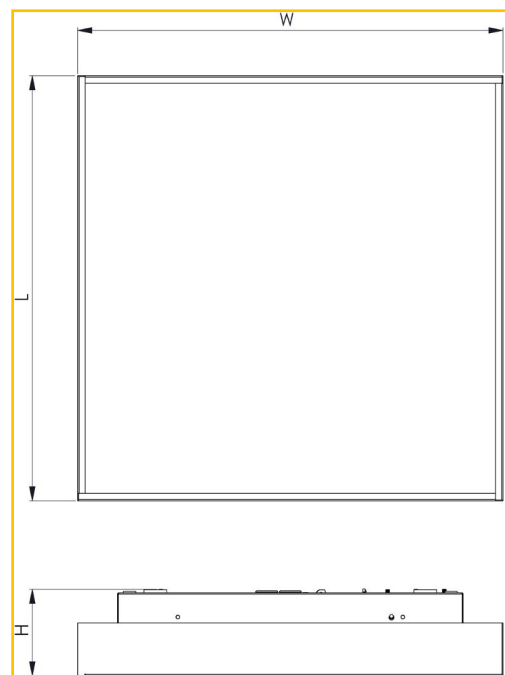

(H - 90mm)

OPTIONS	DESCRIPTION
/DALI	DALI/DSI dimming
/M3	3hr Emergency
/D3	3hr DALI monitored emergency
/BTC	Casambi wireless control

Ordering Format: Product Code / Option

Example: BTS/17/4K/WH/UPL/BTC

