


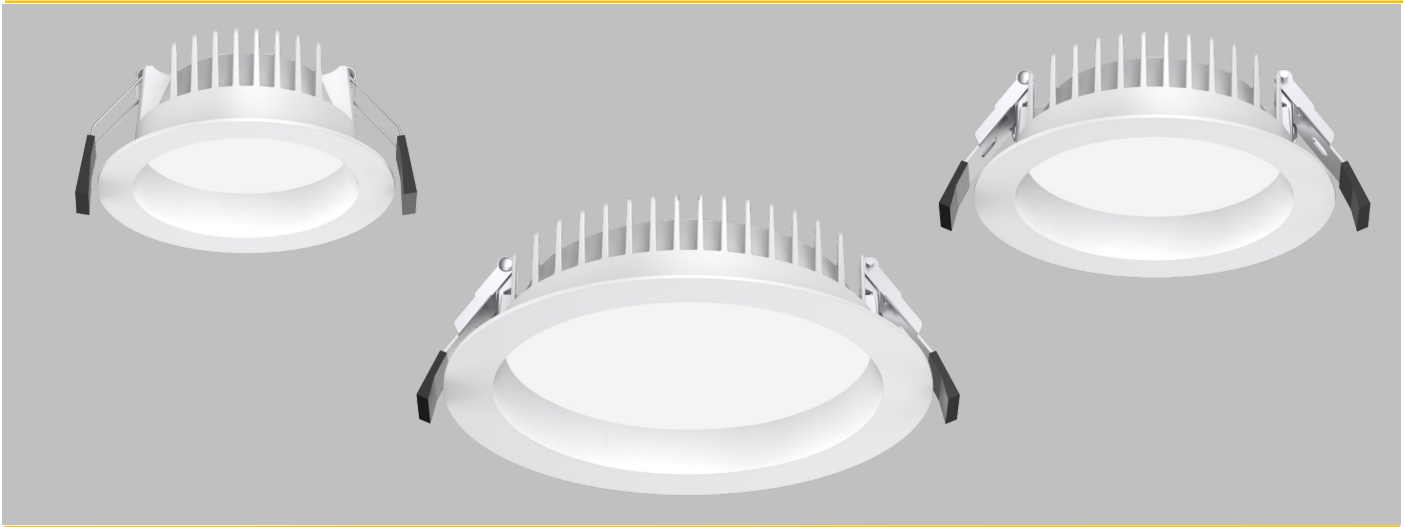

APPLICATIONS

- Corridors
- Toilets
- Canteens
- Receptions


CONSTRUCTION

- Die-cast aluminium body epoxy powder coated White
- Satin opal PC diffuser
- IP54

TECHNICAL DETAILS

- CRI>80
- Switchable CCT 3000K,4000K,5500K
- VSI Driver
- 2835 SMD Chip set
- 50,000hrs (L70)

DIMENSIONS

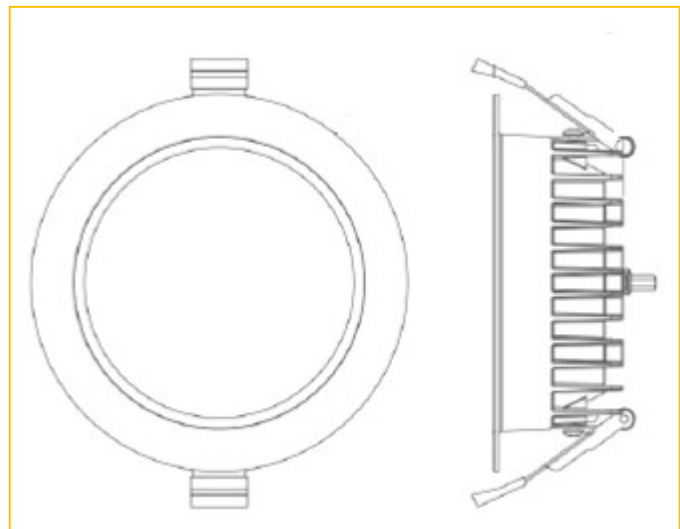

PRODUCT CODE	LUMENS	D	H	CUT-OUT
BXS/12/CCT/WH	1,561LM	140	50	125mm
BXM/18/CCT/WH	2,354LM	190	50	166mm
BXL/25/CCT/WH	3,416LM	225	50	205mm

OPTIONS	DESCRIPTION
/M3	3HR EMERGENCY
/D3	3HR DALI MONITORED EMERGENCY
/DALI	ADDRESSABLE/TOUCH DIM
/BTC	CASAMBI WIRELESS CONTROL

IP54



Ordering Format: Product Code / Option

Example: BXM/18/CCT/WH/DALI