

A unique design wall luminaire with selectable outputs and CCT and with minimal upward light available in three sizes.




Features

- Die-cast aluminium housing RAL9005 as standard other colours available on request
- IK10 impact resistant diffuser
- Stainless Steel fixings
- High quality LED CCT LED chip & Switchable power driver
- IP65

Options

- Integrated 3hr emergency -Standard **(EM)** Self -Testing Emergency **(STE)**
- Microwave Sensor **(MW1)**
- Photo-Cell **(PC)**
- Casambi Wireless Control **(BTC)**

Dimensions

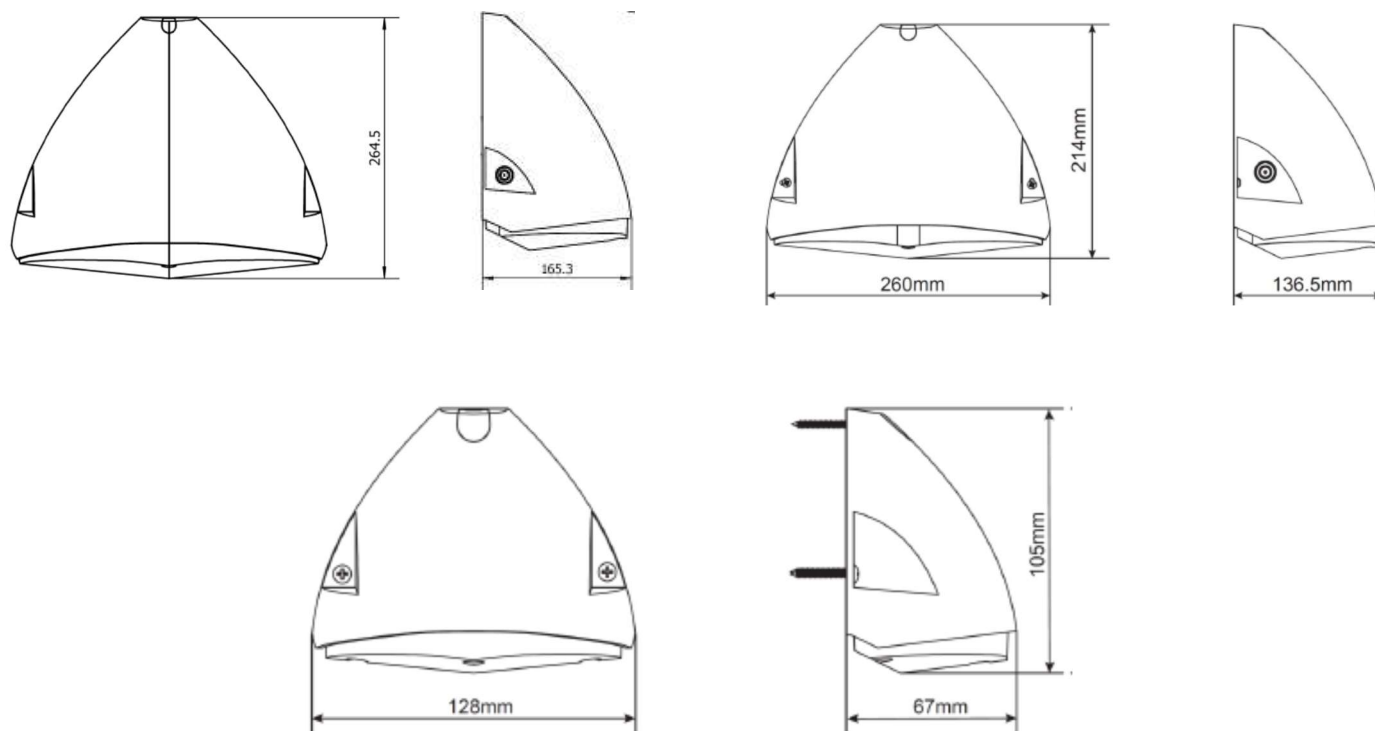

Product Code

MA-S-CCT-BK	Mako, 5w, CCT, 550-580lm, IP65, IK10
MA-M-SW-CCT-BK	Mako, 7-12w, CCT, switchable power 950-1550lm, IP65, IK10
MA-L-SW-CCT-BK	Mako, 13-28w, CCT, switchable power 1700-3500lm, IP65, IK10

** Suffix end of code **(EM)** for emergency facility or **(PC)** Photo-cell or **(BTC)** for Casambi Wireless Control

**Example: CAN-M-SW-BK-BTC Mako, 7-12w, 950-1550lm, IP65, IK10 c/w Bluetooth wireless control.