

A modern take on a traditional bollard available with three head options, Flat, Dome, Louvre with indirect light to reduce glare.

- Carparks
- Building perimeter
- Pathways




## Features

- Die-Cast aluminium body
- Polycarbonate diffuser
- Epoxy powder coated RAL9005
- IP65
- IK09

## Options

- Integrated 3hr emergency -Standard (**M3**)      Self - Testing Emergency (**STE**)
- Micro-wave sensor (**MW1**)
- Photo-cell (**PC**)
- DALI Dimming (**DA**)
- Custom RAL paint finish (**RAL**)
- J-Bolt fixing Kit (**JB7000**)
- Root Mounting Kit (**RM7000**)

## Dimensions

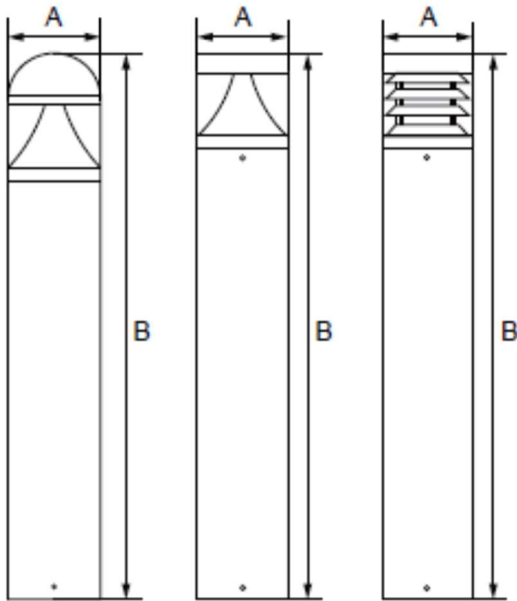

Dimensions

'A' 168mm x 'B' 1000mm

## Product Code

WIN-25-CCT-BK-F	Winchester flat top, 25w, 2340/2370lm, IP65, IK09, finished RAL9005
WIN-25-CCT-BK-D	Winchester dome top, 25w, 2340/2370lm, IP65, IK09, finished RAL9005
WIN-25-CCT-BK-L	Winchester louvre top, 25w,950/1000lm, IP65, IK09, finished RAL9005

\*\* Suffix end of code with option required\*\*

\*\* Example – WIN-25-CCT-BK-F-M3

Winchester Bollard, flat top, 25w, c/w 3hr emergency