

# Capri – 85

Architectural low glare LED downlight, IP44 with die-cast bezel in matt white RAL9003

- Corridors
- Offices
- Toilets
- Break-Out




## Features

- Tridonic LED and driver system for optimum performance
- Matt white bezel RAL9003
- Matt black darklight baffle RAL9005 – developed to minimise glare
- Fitted with an integral IP44 protective lens as standard
- Precision moulded 40° reflector
- Excellent thermally optimised 24 super-fin die-cast heatsink

## Options

- DALI dimming – **(DA)**
- Remote 3hr emergency – **(M3)**
- Remote self-test 3hr emergency - **(STE)**
- Remote DALI monitored emergency – **(D3)**
- Casambi Wireless control – **(BTC)**
- White softlight baffle – **(WSB)**
- Ra9 high colour rendering – **(Ra9)**
- Plaster-In Bezel – **(PI)**

## Dimensions

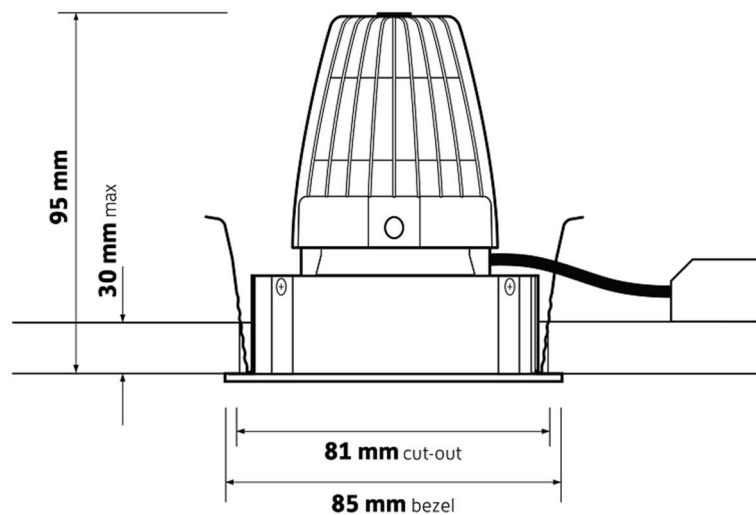

## Product Code

C85-86-3K-WH	C85, LED downlight, 6w, 3K, 675lm, c/w white bezel
C85-6-4K-WH	C85, LED downlight, 6w, 4K, 700lm, c/w white bezel
C85-8-3K-WH	C85, LED downlight, 8w, 3K, 850lm, c/w white bezel
C85-8-4K-WH	C85, LED downlight, 8w, 4K, 900lm, c/w white bezel

\*\* Example – C85-8-4K-WH-DA-WSB

C85 downlight, 8w, 900lm, 4K, white bezel c/w DALI dimming & white softlight baffle