

A decorative modern polo acoustic pendant mounted LED luminaire with options of body sizes & wattages.

- Corridors
- Offices
- Communal Areas
- Education
- Public Places




Features

- Rolled steel body
- PMMA UV stabilized acrylic
- Acoustic wadding
- Epoxy powder coated RAL9003 (Other colour options available on request)
- IP40

Options

- Integrated 3hr emergency -Standard (**M3**) – Self-Testing Emergency (**STE**)
- DALI Monitored Emergency (**DA3**)
- DALI (**DA**)
- Casambi Wireless Control (**BTC**)
- Micro-Prism UGR<19 diffuser (**MPO**)
- Suspension kit (**SUS/2M**)
- Colour options (**RAL******)

Dimensions

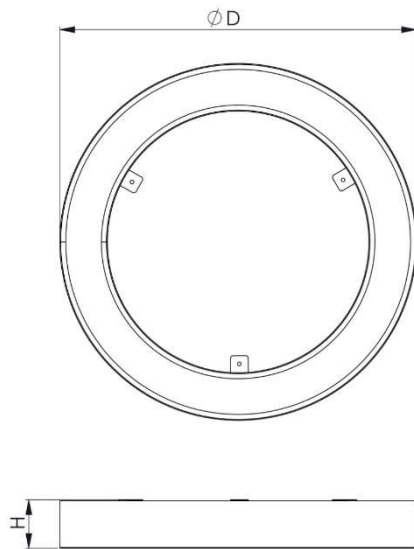

D – 600 / 900 / 1200mm x H - 80mm

Product Code

TAC-17-4K-WH	Trinity Acoustic, 17w, 4K, 2,014lm. 600mm, body finished RAL9003
TAC-24-4K-WH	Trinity Acoustic, 24w, 4K, 2,744lm. 600mm, body finished RAL9003
TAC-35-4K-WH	Trinity Acoustic, 35w, 4K, 3,772lm. 600mm, body finished RAL9003
TAC-27-4K-WH	Trinity Acoustic, 27w, 4K, 3,295lm. 900mm, body finished RAL9003
TAC-38-4K-WH	Trinity Acoustic, 38w, 4K, 4,491lm. 900mm, body finished RAL9003
TAC-55-4K-WH	Trinity Acoustic, 55w, 4K, 6,172lm. 900mm, body finished RAL9003
TAC-35-4K-WH	Trinity Acoustic, 35w, 4K, 4,394lm. 1200mm, body finished RAL9003
TAC-50-4K-WH	Trinity Acoustic, 50w, 4K, 5,987lm. 1200mm, body finished RAL9003
TAC-73-4K-WH	Trinity Acoustic, 73w, 4K, 8,231lm. 1200mm, body finished RAL9003

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control or **(MW1)** Microwave sensor

**Example: TAC-38-4K-WH-BTC

Trinity Acoustic, 38w, 4,191lm, 4K, white c/w Casambi