

Recessed Anti-Vandal luminaire c/w anti-tamper fixings .

- Railways
- Subways
- Underground passages
- Prison
- Psychiatric Unit
- Mental Health




Features

- Fabricated sheet metal housing, fully welded construction
- Opal UV stabilised polycarbonate diffuser 850° glow wire
- Epoxy power coated RAL9016 as standard
- Stainless Steel anti-tamper fixings
- Branded LED boards & Driver
- IP65
- IK10+ Mechanical impact resistance

Options

- Integrated 3hr emergency -Standard **(M3)** – Self Testing **(STE)**
- DALI **(DA)**
- DALI Monitored emergency **(D3)**
- Microwave Sensor **(MW1)**
- Casambi Wireless Control **(BTC)**
- Custom body finishes available on request **(RAL)**

Dimensions

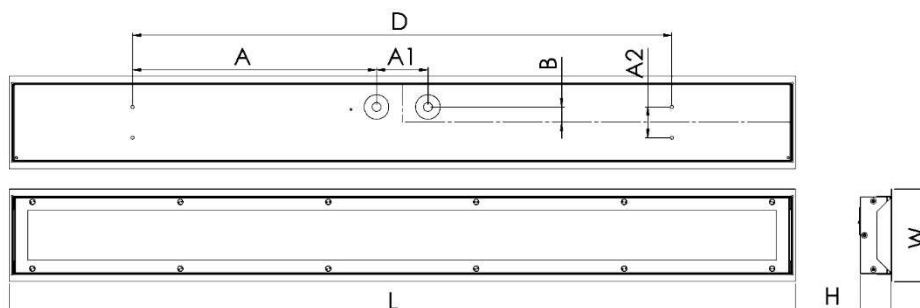

L, mm	W, mm	H, mm	D, mm	A, mm	A ₁ , mm	A ₂ , mm	B, mm
410	180	65	300	100	100	60	30
690			450	175			
970			600	250			
1250			900	400			
1530			1050	525			

Product Code

TRR-13-4K-WH	Trend 13w, 4K, 1,548lm, 410mm L x 180mm W x 65mm H
TRR-19-4K-WH	Trend 19w, 4K, 2,334lm, 690mm L x 180mm W x 65mm H
TRR-28-4K-WH	Trend 28w, 4K, 3,502lm, 970mm L x 180mm W x 65mm H
TRR-38-4K-WH	Trend 38w, 4K, 4,668lm, 1250mm L x 180mm W x 65mm H
TRR-41-4K-WH	Trend 41w, 4K, 5,295lm, 1530mm L x 180mm W x 65mm H

** Suffix WH to RAL for Custom body finish

** Suffix end of code (**M3**) for emergency facility or (**MW1**) for Microwave sensor

Example: TR1-38-4K-WH-M3-MW1

Trend - R c/w 3hr Emergency and Microwave sensor