

A decorative modern square pendant mounted LED with options of body sizes.

- Receptions
- Offices
- Communal Areas
- Education
- Public Places




Features

- Extruded aluminium section
- PMMA UV stabilized opal acrylic diffuser
- Epoxy powder coated RAL9003 (Other colour options available on request)
- IP40

Options

- Integrated 3hr emergency -Standard **(M3)** – Self-Testing Emergency **(STE)**
- DALI Monitored Emergency **(DA3)**
- DALI **(DA)**
- Casambi Wireless Control **(BTC)**
- Micro-Prism UGR<19 diffuser **(MPO)**
- Suspension kit **(SUS/2M)**

Dimensions

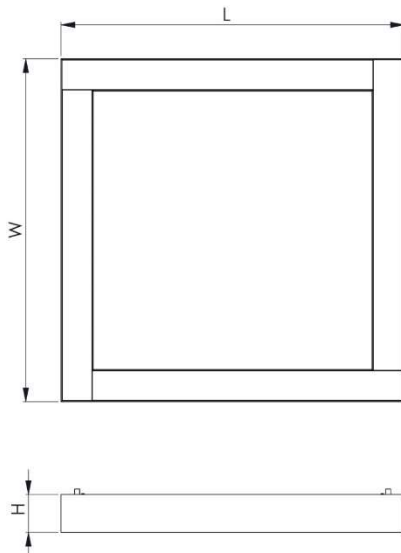

L – 600 / 900 / 1200 x W – 600 / 900 / 1200 x H - 68mm

Product Code

OUS-24-4K-WH	Ouse, 24w, 4K, 2,807lm. 600mm x 600mm body finished RAL9003
OUS-34-4K-WH	Ouse, 34w, 4K, 3,825lm. 600mm x 600mm body finished RAL9003
OUS-50-4K-WH	Ouse, 50w, 4K, 5,258lm. 600mm x 600mm body finished RAL9003
OUS-36-4K-WH	Ouse, 36w, 4K, 3,765lm. 900mm x 900mm body finished RAL9003
OUS-52-4K-WH	Ouse, 52w, 4K, 5,124lm. 900mm x 900mm body finished RAL9003
OUS-77-4K-WH	Ouse, 77w, 4K, 6,949lm. 900mm x 900mm body finished RAL9003
OUS-48-4K-WH	Ouse, 48w, 4K, 5,020lm. 1200mm x 1200mm body finished RAL9003
OUS-70-4K-WH	Ouse, 70w, 4K, 6,832lm. 1200mm x 1200mm body finished RAL9003
OUS-103-4K-WH	Ouse, 103w, 4K, 9,265lm. 1200mm x 1200mm body finished RAL9003

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control

**Example: OUS-52-4K-WH-DA

Ouse 52w, 5,124lm, 4K, white c/w DALI