

Surface/Wall mounted non-corrosive c/w opal polycarbonate diffuser & stainless steel clips

- Car Park
- Boiler Room
- Bike Shed
- Industrial
- Workshop
- Laundry




Features

- UPVC moulded housing
- Opal UV stabilised polycarbonate diffuser
- Stainless Steel clip
- IK10 – BSEN 2262
- IP65

Options

- Integrated 3hr emergency -Standard **(M3)** - Self Testing Emergency **(STE)**
- DALI Monitor Emergency **(D3)**
- DALI **(DA)**
- Batten mounted PIR Sensor **(BPIR)**
- Mirco-wave Sensor **(MW1)**

Dimensions

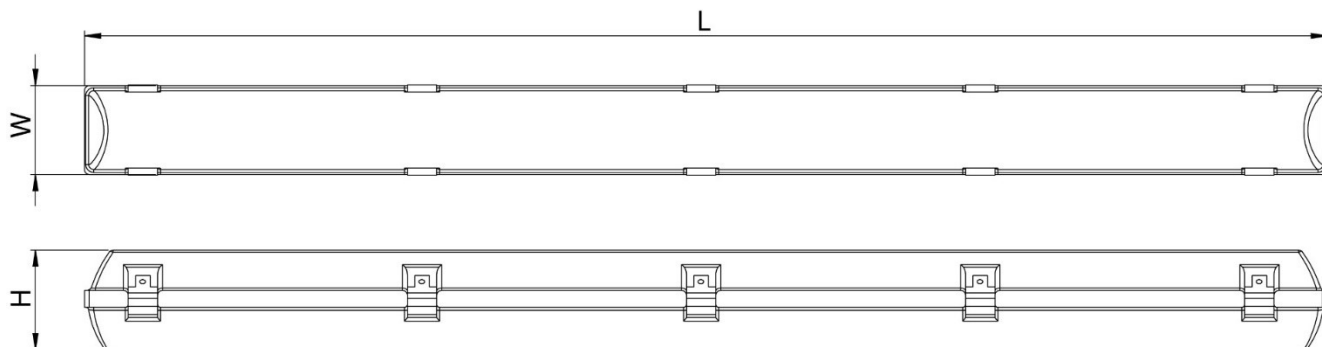

Dimensions – 'W' Single 96mm – Twin 146mm x 'H' 111mm

Product Code

VN-15-4K-65-OP	VENTNOR, 15w, 2,268lm, 662mm body, opal diffuser
VN-18-4K-65-OP	VENTNOR, 18w, 2,674lm, 662mm body, opal diffuser
VN-26-4K-65-OP	VENTNOR, 26w, 3,742lm, 1275mm body, opal diffuser
VN-36-4K-65-OP	VENTNOR, 36w, 5,348lm, 1275mm body, opal diffuser
VN-31-4K-65-OP	VENTNOR, 31w, 4,676lm, 1575mm body, opal diffuser
VN-45-4K-65-OP	VENTNOR, 45w, 6,685lm, 1575mm body, opal diffuser
VN-59-4K-65-OP	VENTNOR, 59w, 8,666lm, 1575mm body, opal diffuser

** Suffix end of code **(M3)** for emergency facility or **(BPIR)** PIR Sensor or **(BTC)** for Casambi Wireless Control

**Example: VN-31-4K-65-BPIR Ventnor 31w c/w Batten mounted PIR Sensor