

High quality wall mounted up/downlight, IP66, IK08 with beam angles options

- Building Facades
- Pillars illumination




Features

- Faceted reflector 12°, 20°, 30°, 40°, 60° options
- Corrosion resistant die-Cast body & bezel
- Dimmable options
- Thermal shock resistant glass diffuser
- Double layer polyester powder coating resistant to corrosion and salt spray fog
- CRI<3SDCM
- Life >50,000h (L70/B10)

Options

- DALI – (DA)
- 3hr emergency facility – (M3)
- 3hr DALI monitored emergency (D3)
- RAL Colour option (RAL)

Dimensions

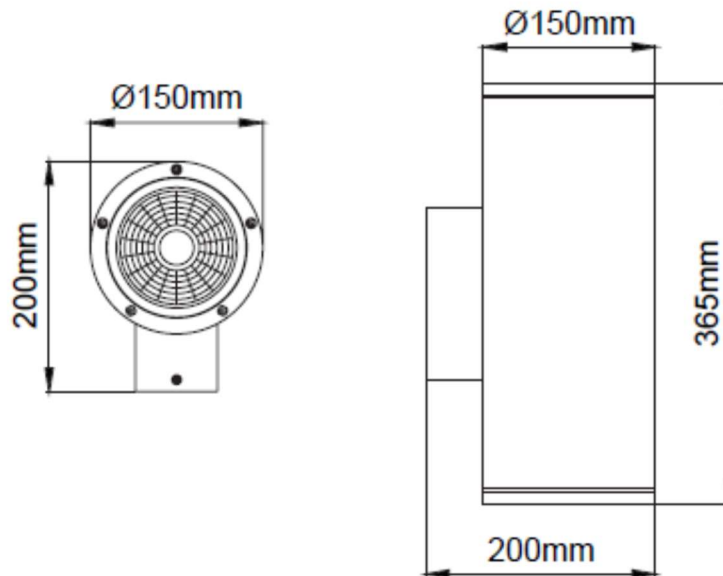

Product Code

KOL-40-27K-30-UD-BK	Koala 2 x 40w, 2700K, 5,230lm, c/w 30° reflector finished RAL 9005 black
KOL-40-3K-30-UD-BK	Koala 2 x 40w, 3000K, 5,335lm, c/w 30° reflector finished RAL 9005 black
KOL-40-4K-30-UD-BK	Koala 2 x 40w, 4000K, 5,556lm, c/w 30° reflector finished RAL 9005 black

** Suffix 30 to reflector degree option required **

** Suffix BK with required RAL colour **

** Suffix end of code with options required **

** Custom wattages available on request **