

# Gladiator 2

Surface/Wall mounted die-cast aluminium base non-corrosive c/w tempered safety glass & stainless-steel security fixings suitable for aggressive atmosphere, cleanroom, acids, mineral oils.

- Car Park
- Boiler Room
- Bike Shed
- Industrial
- Workshop
- Laundry




## Features

- Die-cast aluminium base polyester powder coat RAL9006
- Tempered safety glass
- Glow wire test 850°
- Stainless Steel security fixing
- IK10 – BSEN 2262
- IP66

## Options

- Integrated 3hr emergency -Standard **(M3)** - Self Testing Emergency **(STE)**
- DALI Monitor Emergency **(D3)**
- DALI **(DA)**
- 30, 75, 90° optic options
- Casambi wireless control **(BTC)**
- 3000 Kelvin – **(3K)**

## Dimensions

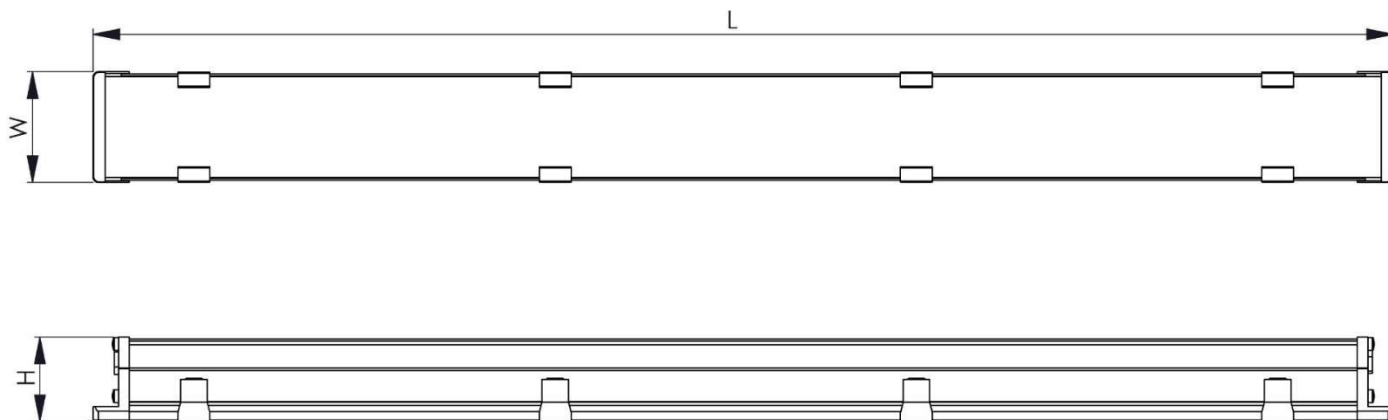

L = 1224/1524mm x W = 105mm x H = 75mm

## Product Code

|                  |                                                                        |
|------------------|------------------------------------------------------------------------|
| GLD2-22-4K-4F-30 | Gladiator, 22w, 3,797.0lm, 1224mm die-cast body, tempered safety glass |
| GLD2-32-4K-4F-30 | Gladiator, 32w, 5,260.0lm, 1224mm die-cast body, tempered safety glass |
| GLD2-42-4K-4F-30 | Gladiator, 42w, 7,554.0lm, 1224mm die-cast body, tempered safety glass |
| GLD2-27-4K-5F-30 | Gladiator, 27w, 4,745.0lm, 1524mm die-cast body, tempered safety glass |
| GLD2-32-4K-5F-30 | Gladiator, 32w, 6,575.0lm, 1524mm die-cast body, tempered safety glass |
| GLD2-42-4K-5F-30 | Gladiator, 42w, 9,443.0lm, 1524mm die-cast body, tempered safety glass |

\*\* Suffix end of code with required option \*\*

\*\* Suffix 30 for required beam angle\*\*

\*\* Suffix 4K to 3K for 3000 Kelvin \*\*

\*\* Example: GLD2-22-4K-4F-30-BTC \*\*      Gladiator 2, 22w, 4K, 3,797.0lm, 1224mm body c/w  
30-degree optic & Casambi wireless control