

Surface mounted robust IK08, IP66 LED downlighter, option of beam angles & RAL colour options

- Canopy
- Underpass
- Leisure centre
- Broad walk




Features

- Corrosion resistant die-Cast aluminium body & base
- Double layer polyester powder coat, resistant to corrosion & salt spray fog
- Spot, medium, wide & wide flood beam option
- Thermal shock resistant safety glass
- Epoxy powder coated RAL7016 as standard
- IP66
- IK08

Options

- DALI Dimming – **(DA)**
- 1-10v dimming – **(1-10)**
- 3000K – **(3K)**
- 20,30,40,60°beam angle option
- Custom paint finish **(RAL)**

Dimensions

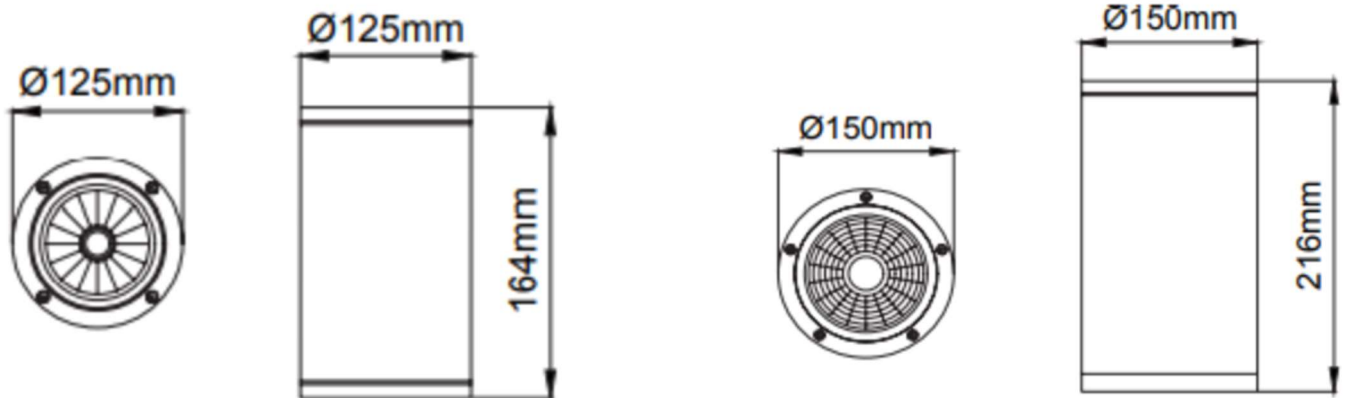

Product Code

VEG-9-4K-65-30D	Vega, 9w, 4K, 1,251lm, IP65 c/w 30° reflector finished RAL7016
VEG-15-4K-65-30D	Vega, 15w, 4K, 2,085lm, IP65, c/w 30° reflector finished RAL7016
VEG-28-4K-65-30D	Vega, 28w, 4K, 3,892lm, IP65 c/w 30° reflector finished RAL7016
VEG-40-4K-65-30D	Vega, 40w, 4K, 5,560lm, IP65 c/w 30° reflector finished RAL7016

** Suffix 4K to 3K for 3000 Kelvin **

** Suffix 30D to required beam angle **