

Surface / Suspended LED, steel base, epoxy powder coated base c/w opal smooth curve diffuser & captive end caps

- Classrooms
- Offices
- Hospitals
- Meeting Rooms
- Atriums




Features

- Robust steel powder coated body
- Smooth, curved, IP44 dust free wipe clean diffuser
- Life >50,000 hours L70/B50
- Tridonic LED and driver system for optimum performance
- Colour rendering Ra80

Options

- DALI – **(DA)**
- Casambi wireless bluetooth control - **(BTC)**
- Standard 3hr emergency – **(M3)**
- DALI monitored emergency – **(D3)**
- Suspension Kit – **(SUS-4-2M)**
- Integrated motion sensor – on/off **(SO)**
- Integrated motion sensor – on/10% dim **(SD)**

Dimensions

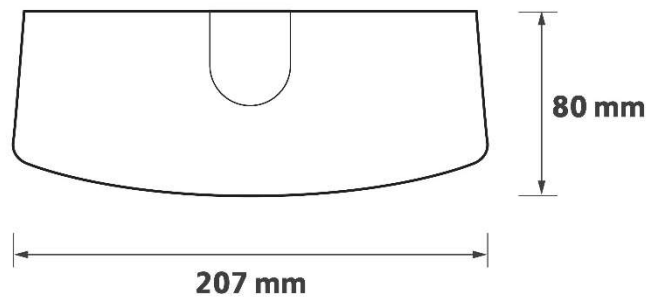

Lengths: 1200 mm / 1500 mm

Product Code

AME-4-19-4K-WH	Amex, 19w, 4K, 2400lm, 1200mm, white base, opal diffuser
AME-4-32-4K-WH	Amex, 32w, 4K, 3800lm, 1200mm, white base, opal diffuser
AME-4-39-4K-WH	Amex, 39w, 4K, 4700lm, 1200mm, white base, opal diffuser
AME-5-33-4K-WH	Amex, 33w, 4K, 4300lm, 1500mm, white base, opal diffuser
AME-5-42-4K-WH	Amex, 42w, 4K, 5275lm, 1500mm, white base, opal diffuser
AME-5-54-4K-WH	Amex, 54w, 4K, 6600lm, 1500mm, white base, opal diffuser

** Suffix 4K to 3K for 3000 Kelvin

** Example: AME-4-32-4K-WH-DA-M3 **

Amex, 1200mm, 32w, 4000 Kelvin, white c/w DALI & 3hr emergency facility