

- Gymnasium
- Industrial
- Distribution Centre
- Sports Hall




Features

- Aluminium extruded body
- Asymmetric and Symmetric options
- Wire guard option
- Epoxy powder coated RAL9010
- IP20
- IK10

Options

- DALI (DA)
- 3hr emergency (M3) - Self-Test emergency (STE) – DALI monitored emergency (D3)
- Casambi Wireless Control (BTC)
- Wire guard (WGW)
- Suspension Kit (SUS-2M)
- PIR Sensor (PIRD)

Dimensions

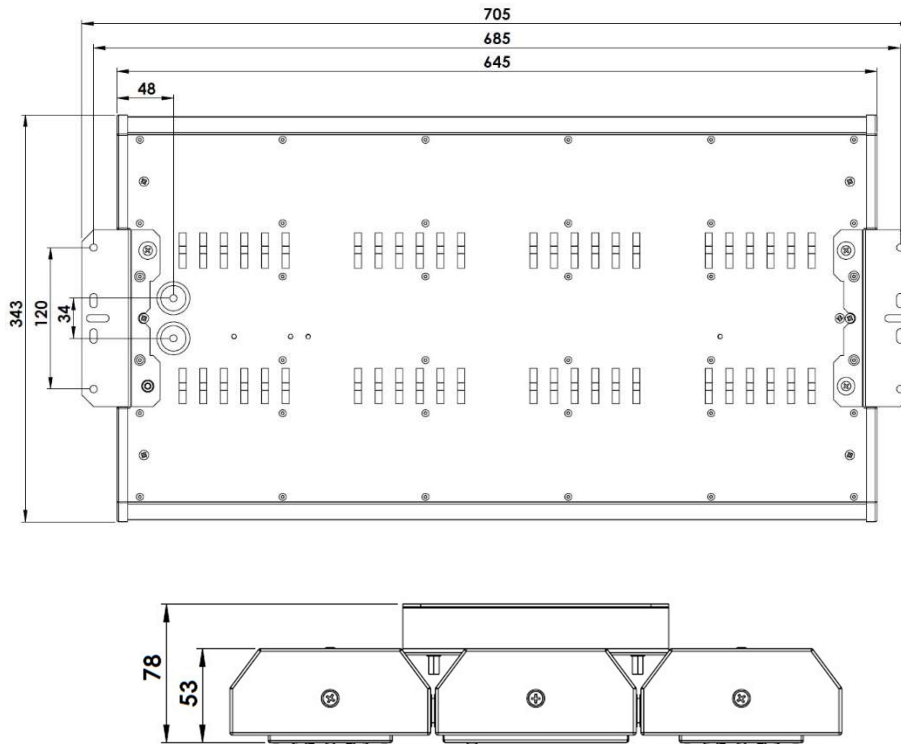

Product Code

ARD-70-4K-WH-L60	Ardent, 70w, 12,350lm, 4K c/w 60 degree optic
ARD-80-4K-WH-L60	Ardent, 80w, 12,891lm, 4K c/w 60 degree optic
ARD-90-4K-WH-L60	Ardent, 90w, 15,367lm, 4K c/w 60 degree optic
ARD-115-4K-WH-L60	Ardent, 115w, 18,863lm, 4K c/w 60 degree optic
ARD-135-4K-WH-L60	Ardent, 135w, 22,357lm, 4K c/w 60 degree optic
ARD-160-4K-WH-L60	Ardent, 160w, 25,649lm, 4K, c/w 60 degree optic
ARD-170-4K-WH-L60	Ardent, 170w, 28,148lm, 4K, c/w 60 degree optic

*Suffix end of code L** to optic option*

(L40) 40° x 40° optic

(L30x65) 30° x 65° optic

(L75) 75° x 75° optic

(L90) 90° x 90° optic