

Surface/Wall mounted non-corrosive c/w opal polycarbonate diffuser & stainless-steel clips

- Car Park
- Boiler Room
- Bike Shed
- Industrial
- Workshop
- Laundry




Features

- UPVC moulded housing
- Opal UV stabilised polycarbonate diffuser
- Stainless Steel clip
- Switchable CCT & Power
- IK08
- IP65

Options

- Integrated 3hr emergency -Standard (M3)
- Batten mounted PIR Sensor (BPIR)
- Micro-wave Sensor (MW1)

Dimensions

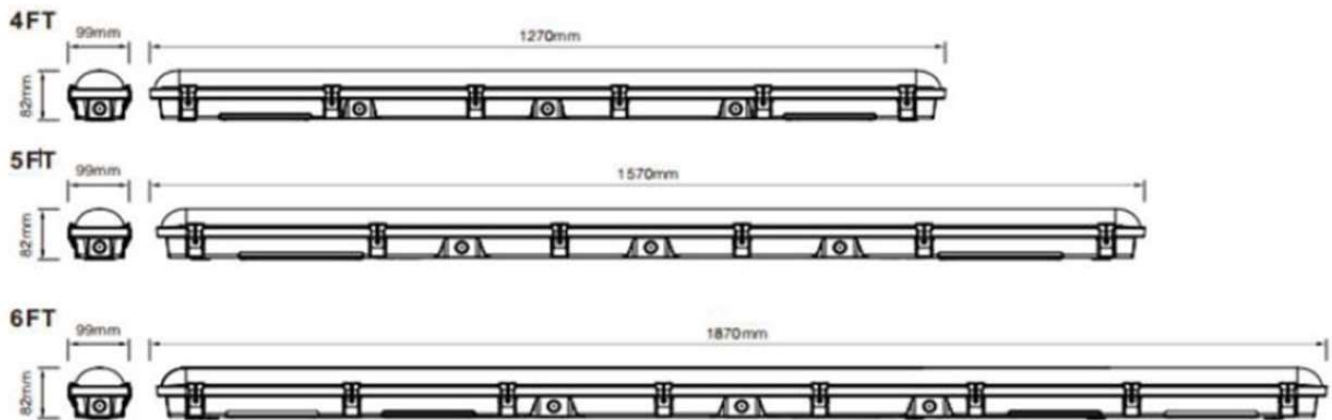

Product Code

ARN-36-4-CCT-65	Arrow, 1270mm, 20 – 36w, 3080 – 5400lm, IP65, switchable power & CCT
ARN-50-5-CCT-65	Arrow, 1570mm, 28 – 50w, 4280 – 7500lm, IP65, switchable power & CCT
ARN-60-6-CCT-65	Arrow, 1870mm, 34 – 60w, 5140 – 9000lm, IP65, switchable power & CCT

** Suffix end of code **(M3)** for emergency facility or **(BPIR)** PIR Sensor or **(BTC)** for Casambi Wireless Control

**Example: ARN-50-5-CCT-65-BPIR Arrow up to 50w c/w Batten mounted PIR Sensor