

A modern and stylish square bollard available in two heights and two outputs to suit a variety of applications with an indirect light source to reduce glare.

- Carparks
- Building perimeter
- Pathways




Features

- Die-Cast aluminium body
- Polycarbonate diffuser
- Epoxy powder coated RAL9007
- IP65
- IK09

Options

- Integrated 3hr emergency -Standard (**M3**)
 - Micro-wave sensor (**MW1**)
 - Photo-cell (**PC**)
 - DALI Dimming (**DA**)
 - Custom RAL paint finish (**RAL**)
 - J-Bolt fixing Kit (**JB7000**)
 - Root Mounting Kit (**RM7000**)
- Self - Testing Emergency (**STE**)

Dimensions

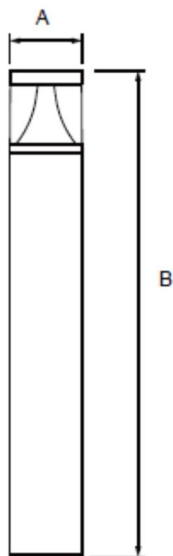

Dimensions: (Flange) 120mm x 1000mm (Inground) 120mm x 800mm

Product Code

BST-15-CCT-SL	Barnstable, 15w, 1470/1530lm, CCT, IP65, IK09 finished RAL9007
BST-30-CCT-SL-F	Barnstable, 30w, 2820/2940lm, CCT, IP65, IK09 flange mounted RAL 9007

** Suffix end of code with option required**

** Example – BST-15-CCT-SL-M3

Barnstable, 15w, ground mounted c/w 3hr emergency