

Low glare LED downlight, IP54 with die-cast bezel in brilliant RAL9003

- Domestic Dwellings
- Offices
- Schools




Features

- Professional, minimal IP54 LED downlight
- Die-cast low profile bezel, white RAL9003
- Injection moulded 36° faceted reflector
- High efficacy, low glare
- No visible flicker (IEEE PAR1789 2015)

Options

- DALI dimming – **(DA)**
- Phase-cut dimming – **(MDIM)**
- Remote 3hr emergency – **(M3)**
- Remote self-test 3hr emergency - **(STE)**
- Casambi Wireless control – **(BTC)**
- Black bezel – **(BK)**

Dimensions

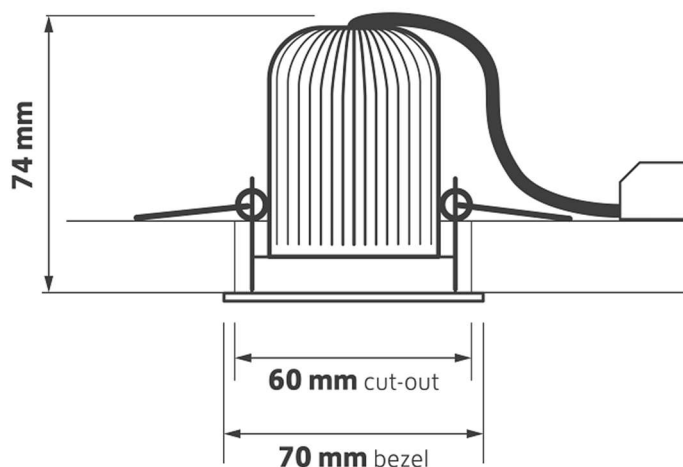

Product Code

C70-8-3K-WH

C70, IP54 downlight, 8w, 3K, 750lm, c/w white bezel

C70-8-4K-WH

C70, IP54 downlight, 8w, 4K, 775lm, c/w white bezel

** Example – C70-8-4K-WH-MDIM

C70 downlight, 8w, 4K, white bezel c/w mains dimming