

Recessed backlit LED panel suitable for exposed tee 15/24mm

- Schools
- Colleges
- Hospitals
- Offices
- Boardrooms




Features

- Steel Base
- Die-Cast Aluminium bezel
- Epoxy powder coated RAL9016
- IP20
- Opal Satin Diffuser 650° Glow wire test

Options

- Integrated 3hr emergency -Standard (**M3**) – Self-Testing Emergency (**STE**)
- DALI (**DA**)
- Casambi Wireless Control (**BTC**)

Dimensions

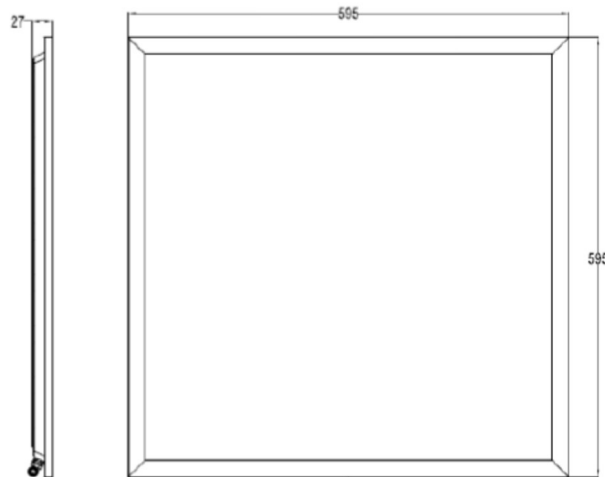

Product Code

DP-36-4K-WH

DELTA 36w, 4K, 595mm x 595mm LED panel

DP-36-4K-UGR-WH

DELTA 36w, 4K, UGR<19, 595mm x 595mm LED Panel

** Suffix end of code **(M3)** for emergency facility or **(DA)** for DALI/Switch DIM or **(BTC)** for Casambi Wireless Control

**Example: DP-36-4K-WH-DA

DELTA c/w DALI/Switch DIM Control