

Surface/Wall mounted non-corrosive c/w GRP base opal polycarbonate diffuser & stainless-steel clips

- Car Park
- Boiler Room
- Bike Shed
- Industrial
- Workshop
- Laundry



## Features


- GRP moulded housing
- Opal PMMA diffuser
- Stainless Steel clip
- Switchable Power
- IK06
- IP66
- LumiLED LED's & Philips Xitanium driver

## Options


- Integrated 3hr emergency -Standard (**M3**) – DALI Monitored emergency (**D3**)
- DALI dimming (**DA**)
- Batten mounted PIR Sensor (**BPIR**)
- Micro-wave Sensor (**MW1**)

## Dimensions

### 2FT

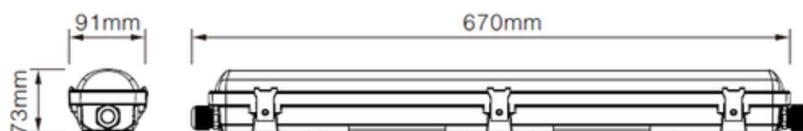

### 4FT



### 5FT



## Product Code

ENZ-16-2-SW-66	Enzo, 670mm, 9 – 16w, 1280 – 2240lm, IP66, switchable power
ENZ-42-4-SW-66	Enzo, 1220mm, 24 – 42w, 3600 – 6300lm, IP66, switchable power
ENZ-60-5-SW-66	Enzo, 1520mm, 34 – 60w, 5140 – 9000lm, IP66, switchable power

\*\* Suffix end of code (**M3**) for emergency facility or (**BPIR**) PIR Sensor or (**BTC**) for Casambi Wireless Control

\*\*Example: ENZ-60-5-SW-66-BPIR      Enzo up to 60w c/w Batten mounted PIR Sensor