

Surface/Wall mounted die-cast aluminium base non-corrosive c/w opal polycarbonate diffuser & stainless-steel security fixings

- Car Park
- Boiler Room
- Bike Shed
- Industrial
- Workshop
- Laundry




Features

- Die-cast aluminium base powder coat RAL9006
- Opal UV stabilised polycarbonate diffuser
- Wattage & 3CCT selectable
- Stainless Steel security fixing
- IK10 – BSEN 2262
- IP66

Options

- Integrated 3hr emergency -Standard (**M3**) - Self Testing Emergency (**STE**)
- DALI Monitor Emergency (**D3**)
- DALI (**DA**)
- Batten mounted PIR Sensor (**BPIR**)
- Mirco-wave Sensor (**MW1**)
- Casambi wireless control (**BTC**)

Dimensions

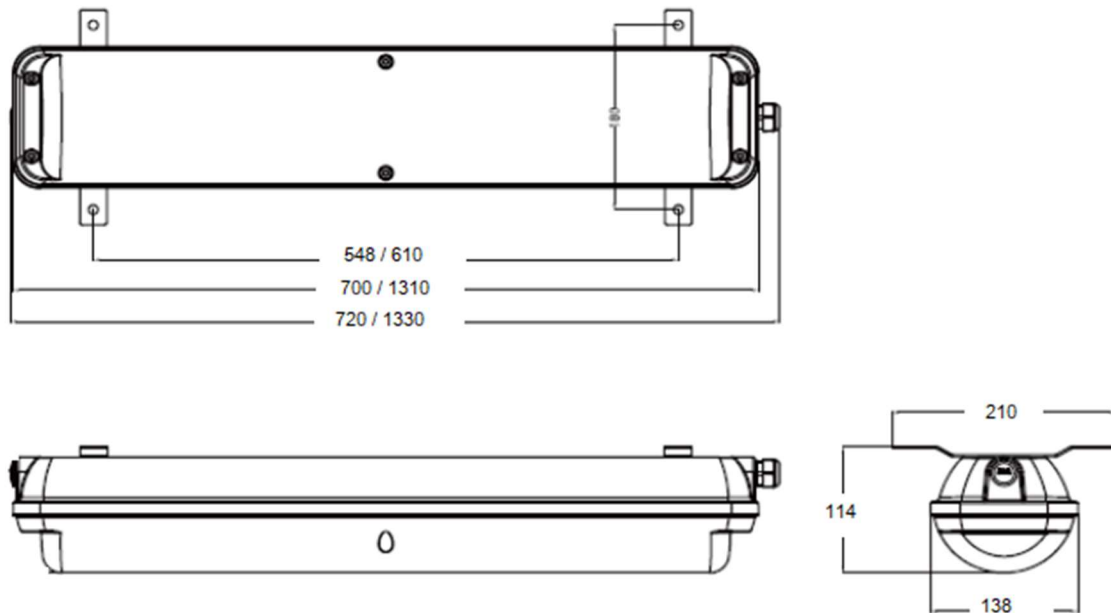

Product Code

GLD-SW-CCT-66-OP-2F	Gladiator, 11,14,17,20w, 1320,1680,2040,2400lm, 3CCT, 720mm
GLD-SW-CCT-66-OP-4F	Gladiator, 33,40,42,50w, 3960,4800,5040,6000lm, 3CCT, 1330mm

** Suffix end of code (**M3**) for emergency facility or (**BPIR**) PIR Sensor or (**BTC**) for Casambi Wireless Control

**Example: GLD-SW-CCT-66-OP-2F-BTC

Gladiator, 720mm body switchable power & CCT c/w Casambi